


NEFF APPLIANCE RANGE BROCHURE

Cooking inspires people. People inspire us.





CONTENTS

HOME CONNECT	4-5
NEW ENERGY LABEL	6-7
OVENS FOR EVERY COOKAHOLIC OVENS – THE COLLECTION	8-9
COMPACT APPLIANCES & COMBINATIONS	10-11 18-19
THE PERFECT COMBINATION	21
COOKING WITH A NEFF OVEN	22-23
OVENS	24-39
Slide&Hide® Pyrolytic Ovens with Vario Steam	24-25
Slide&Hide® Ovens with Added Cleaning	24-25
Slide&Hide® Single Ovens with Full Steam	26-27
Slide&Hide® Single Ovens with Vario Steam	26-27
Slide&Hide® Single Ovens	26-27
Single Pyrolytic Ovens	28-29
Single Ovens	28-29
Compact Combination Ovens with Full Steam Compact Coffee Centre	30-31 31
Compact Ovens with Microwave and	
Microwave Combination Ovens	32-33
Microwave Ovens	34-35
Warming Drawers Built-in Double Ovens with CircoTherm®	36-37 38-39
HOBS	40-75
Venting Hobs	54-56
Flex Induction Hobs Induction Hobs	57-61 62-63
Ceramic Hobs	64-65
Domino Hobs	66-67
Gas Hobs	68-75
COOKER HOODS	76-111
Worktop Installation	90-91
Ceiling Installation Hoods	92-93
Island Hoods	94-95
Wall Installation Hoods	96-99
Glass Chimney Hoods	100-101
Box Chimney Hoods	102-103
Pyramid Chimney Hoods	104-105
Telescopic Hoods	106-107
Canopy Hoods Integrated Hoods	108-109 110-111
COOLING	112-135
Built Under Wine Cabinets	122
American-style Fridge Freezers	123
Built-in Fridge Freezers	124-127
Built-in Single Door Fridges and Freezers 177cm	128-129
Built-in Single Door Fridges and Freezers 140cm	130-131
Built-in Single Door Fridges and Freezers 122cm	130-131
Built-in Single Door Fridges and Freezers 102cm	132-133
Single Door Fridges and Freezers 87cm	132-133
Built-under Single Door Fridges and Freezers 82cm	134-135
DISHWASHERS	136-149
Fully Integrated Dishwashers	142-145
Semi-integrated Dishwashers	146-147
SlimLine Dichwachers	1/18-1/19

APPLIANCE LINE DRAWINGS NEFF CUSTOMER SERVICE

Integrated Laundry

Freestanding Laundry

This brochure was last updated on 16th April 2021.

150-155

152-153

154-155

HOME CONNECT

Enhance your cooking with NEFF and Home Connect

Enhance your kitchen experience, set up and control your appliances with ease, personalise the display and responses to your liking. Home Connect helps you use your appliance to its maximum potential, receiving helpful tips and hints via your phone or tablet, including when your oven has reached temperature.




COMMUNICATE WITH YOUR OVEN

START COOKING WITH THE APP AND GET NOTIFIED WHEN DINNER IS READY



For many Cookaholics, talking to their oven comes naturally. With your hands full kneading dough and rolling it out for tagliatelle, it's more than handy to start the oven and select the relevant cooking function hands-free via voice control. Our oven can talk back too: with Home Connect you can expect to receive a notification directly to your smartphone when dinner is ready. So you can focus on entertaining your guests. Being able to see all heating modes with a simple tap means you can pick the right method to suit your recipe. You can even create a favourite mode for a fast short cut, brilliant for those mid-week dinners when time is of the essence

A WORLD OF INSPIRATION



With the Home Connect app, you can manage and set up your appliance routines that support you in the kitchen. Furthermore, the app also contains a bank of inspiring ideas and recipes tailored for any Cookaholic that loves original and fresh cooking.



WAKE UP AND SMELL THE COFFEE

YOUR FAVOURITE COFFEE AND MUSIC ARE WAITING FOR YOU IN THE KITCHEN

Just say the word and your favourite coffee will be ready in no time. If you integrate voice control into your connected kitchen, you can add an automatically prepared coffee to your morning routine and order the coffee from another room. A voice command is all it takes to get the day started with motivational music while sipping your espresso or flat white. On the subject of coffee, don't forget to use your coffee grounds to grow mushrooms – delicious when grilled.



KEEP YOUR HANDS ON THE COOKING

LET THE HOOD JUDGE THE EXTRACTION YOU NEED

When you and your hob are causing a steam storm in the kitchen, our Automatic Hood springs to life as the two appliances are connected via Wi-Fi. The hood automatically adapts the extraction rate to the cooking aromas and vapours it detects. If desired, you can even adjust the extraction via the Home Connect app or using the stylish TwistPadFire® dial on the cooktop – there's a control option to suit any mood.

EXPAND YOUR COOKING REPERTOIRE

OUR PARTNERSHIP WITH

ckbk offers unlimited online access to a curated collection of the world's finest cookbooks with over 80,000 recipes. Send instructions straight to your NEFF oven from ckbk recipes. Discover your NEFF oven's advanced cooking modes with a specially curated collection of recipes.



OUR WIFI-CONNECTED FRIDGE IS READY WHEN YOU ARE

Maybe you're at the supermarket doing a big shop and need to pre-cool the fridge so your groceries are chilled quicker. Or you've bought drinks for a party and need them to be cooled on time. With Super Cooling, you can get your fridge down to temperature before you get home – a few taps in the app is all it takes.





ONE TAP AND THE DISHWASHER DOES THE REST

A VOICE COMMAND OR A TAP ON YOUR SMARTPHONE IS ALL IT TAKES

It's so much easier to set up your dishwasher with Home Connect, as you'll have immediate access to the settings with just a tap, which means you can set the hard water levels without bending over. To keep your machine in good working order we'll even suggest when to run a machine clean programme, monitor the number of cycles, and even help with the shopping using smart reorder via Amazon Alexa.



neff-home.com/uk/

used just for washing, the label is divided into two parts. The left side of the label specifies the values for the complete wash and dry operating cycle. The right side of the label shows the values for the wash cycle alone. The values to be specified on this label for the wash

The outgoing energy label for

washer dryers has not been revised

* Values apply to washing quarter, half and full loads and washing and drying half and full loads. ** Wash and dry.


cycle alone reflect the changes in

washing machine label.

mandatory information for the new

INTRODUCING THE NEW ENERGY LABEL, EFFECTIVE 1ST MARCH 2021

Technological development over the past few years has resulted in a higher concentration of products that carry labels with a value of A+ or better. Consequently, the label has not been fulfilling its original function as an aid for making purchasing decisions as well as it formerly did. Other basic conditions like user behaviour have also changed. That's why it's time to adapt the existing energy label. The first home appliances to have the new label will be washing machines, washer-dryers, dishwashers, cooling appliances and wine coolers. As of 1 March 2021, these appliances must show the new label when sold in shops, online, etc. As the new label has to be added to these appliances before this date, we would like to provide you now with some information on the future energy label.



SAMPLE OF NEW **ENERGY LABEL FOR DISHWASHERS:**


- 1. QR code
- 2. Energy efficiency class
- **3.** Energy consumption in kWh/100 operating cycles (in Eco programme)
- 4. Number of standard place settings for the Eco programme
- 5. Water consumption in litres/ operating cycle (in Eco programme)
- 6. Duration of the Eco programme
- 7. Noise emissions expressed in dB(A) re 1pW and noise emission class

The energy efficiency class for dishwashers continues to be based on the Eco programme. However, the test standard has been changed. For example cups, pots and plastic utensils will be used to determine cleaning and drying performance to better reflect actual usage behaviour. What is new is the specification of the duration of the Eco. specification of the duration of the Eco programme. This programme is especiall eco-friendly, is ideal for normally soiled dishes and is the most efficient programme in the combination of energy and water consumption. As with washing machines

in the test programme to which all lab values refer. Like, for example, the energy consumption which will be based on 100 wash cycles. The new Eco 40-60* programme is suitable for cleaning normally soiled fabrics made of cottor linen or mixed fibres which, based on their care symbol, are washable at 40°C or 60°C. The fabrics named may be combined in this wash cycle. The Eco 40-60 programme is the most efficient programme in the combination of energy and water consumption.

In order to achieve optimal energy efficiency, an optimal washing temperature is defined for this programme. This temperature can't be changed by th or organime. This temperature can t be changed by the customer. The actual washing temperature is specified in the user manual and, depending on the load size, may deviate from the selected washing temperature for reasons of saving energy. Washing performance complies with legal requirements.

** Values apply to quarter, half and full loads.



WASHING **MACHINES:**

vill be based on 100

cleaning cycles.

- 1. QR Code
- 2. Energy efficiency class**
- **3.** Weighted energy consumption** in kWh/100 operating cycles (in Eco 40-60 programme)
- 4. Maximum load capacity
- **5.** Duration of Eco 40-60 programme
- 6. Weighted water consumption** in litres/operating cycle (in Eco 40-60 programme)
- 7. Spin efficiency class**
- 8. Noise emissions during spin cycle expressed in dB(A) re 1 pW and noise emission class

The procedure for determining the energy class is now more comprehensive. It takes into account the type of appliance, its operating principle, the room's temperature and the number and elements on the new energy label basically remain the same. Energy consumption continues to be specified in kWh as an annual consumption (annum). The label also provides information on the total volume of all refrigerator compartments and all freezer compartments, if any, and on noise

WASHER DRYERS:

2. Energy efficiency class* (complete operating cycle) 3. Energy efficiency class* (wash cycle)

6. Maximum load capacity

4. Weighted energy consumption* in kWh/100

cycles (complete operating cycle**)

5. Weighted energy consumption*

(complete operating cycle**)

operating cycle (wash cycle)

12. Spin efficiency class

7. Maximum load capacity (wash cycle)

8. Weighted water consumption* in litres/

9. Weighted water consumption* in litres/

11. Duration of Eco 40-60 programme


10. Programme duration (complete operating

13. Noise emissions during spin cycle expressed in dB(A) re 1 pW and noise emission class

operating cycle (complete operating cycle**)

in kWh/100 cycles (wash cycle)

1. OR Code



ENERG1 (1)

4)055 XYZ kWh/@ 0XYZ kWh/@ (5)

6 XY,Z kg (7)

(8) XYL 🖏 XYL (9)

10 x:YZ (1)

12 F NO 13


D(3)

FRIDGE AND FREEZER **APPLIANCES:**

- 1. QR Code
- 2. Energy efficiency class
- **3.** Energy consumption in kWh/annum (measured under new standard conditions)
- 4. Total volume of all freezer compartments
- **5.** Total volume of all refrigerator compartments
- **6.** Noise emissions expressed in dB(A) re 1 pW and noise emission class

WINE CABINETS:

- 1. QR code
- **2.** Energy efficiency class
- **3.** Energy consumption in kWh/annum (measured under new standard conditions)
- 4. Number of standard wine bottles that can be stored
- **5.** Noise emissions expressed in dB(A) re 1 pW and noise emission class



As with the other labels, the scale of energy efficiency classes is also changing for the labels of wine cabinets. Furthermore, a QR code and the noise emission classes are also given here. As before, the annual energy consumption and the number of standard wine bottles to be stored are still

AN OVEN FOR EVERY COOKAHOLIC



Our ovens are designed by cooks, for cooks. We're proud of our strong aesthetic values and our ovens look as great on the outside as they work on the inside. But what makes NEFF stand out is our commitment to providing a better cooking

At NEFF, we appreciate that every customer has a unique set of requirements. We've done our best to make our oven range as varied as possible to suit every kitchen. There are three types of ovens in the NEFF collection, single, compact



Steam Oven with Home Connect

THE BEAUTY OF A MICROWAVE COMBINATION MODEL IS THAT IT CAN MIMIC ALL THE BENEFITS OF A TRADITIONAL OVEN IN A FRACTION OF THE TIME.

COMPACT OVENS

SEAMLESS COMBINATION MEETS **ADVENTUROUS COOKING**

Intended to complement our unique Slide&Hide® Oven range, our innovative 45cm Compact Ovens provide additional cavity space whilst offering a premium and seamless kitchen design. Use our SeamlessCombination® mounting kits to create your very own stylish 'mix and match' appliance wall. Our SeamlessCombination® mounting kits are only available within the N90 and N7<u>0 Collections</u>

Designed to offer the ultimate flexibility, our compact appliances provide all of the innovative features you'd expect from a NEFF Single Oven. With CircoTherm® as a standard across most Compact Ovens, multiple dishes can be cooked simultaneously without any intermingling of flavours. Plus, selected models offer our innovative Pyrolytic Self-Cleaning function to make oven cleaning a chore of the past. If you're looking to push the boundaries with creative cooking our Compact Full Steam and Compact Microwave Ovens is a must have appliance for your kitchen. Pair one of our Compact Ovens with a Single Slide&Hide® Oven to create a more versatile and larger cooking capacity than a standard Double Oven offers. Head to page 18 to discover how our small ovens have big ideas.

SINGLE OVENS

Your versatile kitchen companion

NEFF's iconic CircoTherm® hot air system is fitted as standard on all single ovens. It's then up to you to choose from the other features to suit your cooking style. Use your voice with Home Connect, let our Pyrolytic Self-Cleaning models make cleaning up after your creations a breeze. And if you want the benefits that steam offers, choose a model with Vario Steam®, Full Steam or Added Steam.



B58VT68H0B N90 Slide&Hide® Single Pyrolytic Oven with Home Connect

DOUBLE OVENS

DOUBLE THE SPACE, DOUBLE THE COOKING

With the convenience of two oven cavities, our built-in Double Ovens provide any Cookaholic with plenty of cooking space without impacting on kitchen design. Featuring NEFF's CircoTherm® technology in the main oven and Pyrolytic Self-Cleaning in both, it's possible to cook different dishes on multiple levels without any intermingling of flavours or mess to clean up.



Featured model U2ACM7HN0B N50 Pyrolytic





BUILT-UNDER DOUBLE OVENS

Our built-under Double Ovens remain a popular choice for cooks who have limited space with unlimited ideas. Featuring a main oven with our unique CircoTherm® hot air technology, it's possible to cook different dishes across multiple levels and everything will come out tasting like it should. Our builtunder Double Ovens are ideal for cooks who need the flexibility of a double oven, but have limited space in their kitchen.

Featured model:

B1ACE4HN0B N50 Built-Under Double Oven

- THE COLLECTION

Choosing the right appliance to complement your kitchen and lifestyle can be challenging. To help you select the perfect kitchen companion, we've introduced easy-to-follow Collections based on product features, technology, design and simplicity. There's a Collection to suit everyone.*

FEATURES

THIS COLLECTION CAN INCLUDE*:-

Slide&Hide® with Home Connect

Slide&Hide® door with Rotating

Full Touch Control 5.7" inch

Medium Shift Control 4.1" inch

Full Steam

NEFFLight®

Vario Steam®

Pyrolytic Self-Cleaning

CircoTherm®

SeamlessCombination®

Multi Point Meat Probe

ComfortFlex Rails



Full Touch Control display; 5.7" high resolution TFT colour graphics display



Medium Shift Control; 4.1" high resolution

on the features listed in our Collections visit neff-home

FEATURES

THIS COLLECTION CAN INCLUDE*:-

Slide&Hide® door with Rotating Handle

Small Shift Control 2.5" inch

Vario Steam®

Pyrolytic Self-Cleaning

CircoTherm®

SeamlessCombination®



all Shift Control; 2.5" high resolution TFT colour graphics display



FEATURES

Medium LCD White Electronic Control

Small LCD White display

Pyrolytic Self-Cleaning



Medium LCD White electronic display



THIS COLLECTION CAN INCLUDE*:-

Slide&Hide® with Home Connect

Slide&Hide® with Rotating or Fixed Handle, depending on the model

Added Steam

CircoTherm®

Single Point Meat Probe

ClipRails





Small LCD White display

DESIGN COORDINATION

Achieving a premium, seamless kitchen has never been easier

At NEFF, we appreciate that every customer has a unique set of requirements when it comes to designing the kitchen of their dreams. Choosing the right appliances to reflect your own cooking and design style is often overwhelming. That's why NEFF is on hand to help you achieve that all important premium look by grouping products across all categories into 3 unique Collections.

Defined by the unique Slide&Hide® Oven with disappearing door, our N90, N70 and N50 Collections each offer a different design and range of features, so you can create a seamless kitchen best suited to your individual needs.



Our most premium collection of appliances are designed to enhance the cooking process for any Cookaholic. Offering a choice of 2 display designs with a Full Touch or Shift Control operation, the N90 Collection is equipped with every feature and function that a creative chef desires. To ensure you achieve a seamless kitchen, make sure you mix and match N90 appliances that have the same control display.

Offering a sleek and stylish design with a range of innovative features and functions, our N70 collection is perfect for those who love to experiment in the kitchen.



Our newest product collection gives passionate cooks the tools they need to get creative in the kitchen. Designed with a more traditional dial control operation, our N50 Slide&Hide® Oven Collection offers all the features and functions to inspire any budding chef.




SLIDE&HIDE®

Get closer to your cooking

We create appliances that are tailored to modern lifestyles and requirements. Our unique Slide&Hide® door fits smoothly under the oven cavity to give plenty of room, as well as better access to the oven's interior – ensuring an easy and flexible approach to cooking. Recognising our customers' need for maximum cooking space, our unique full-sized single ovens are now even larger with a 71-litre







Slide&Hide® Single Oven

NOTHING GETS IN THE WAY OF COOKING, NOT EVEN THE DOOR.

Selected Slide&Hide® models are now available with a choice of:
















Accessible – Baste, taste and monitor your dishes throughout the



Space saving – Slide the door awa to maximise space in



Unique - Be the envy of all your dinner quests with the only oven to feature a disappearing door

CIRCO THERM®

Simultaneous cooking on multiple levels

With CircoTherm® you can cook, roast and bake completely different dishes on all levels and everything will come out tasting like it's supposed to. With no intermingling of flavours, the roast meat will taste like roast meat, and the muffins will taste like muffins. With flat items like cookies you can bake them using all four levels.

COOK A THREE-COURSE MEAL IN-ONE-GO WITHOUT THE

INTERMINGLING OF FLAVOURS.



CircoTherm® works by drawing air in from the oven via a powerful stainless steel fan. It then heats up the air and forces it right back into the oven cavity through strategically placed ducts in the rear wall. The desired temperature is achieved quicker and more evenly than in a conventional oven, saving time and energy as little or no preheating is required. There is also a new Power Boost function, available within our 4D CircoTherm® system, to speed things up even more when cooking for short periods of time - just put the food in and start the oven.

The hot air is focused directly onto the food being cooked, wrapping the shelves to ensure the surfaces of baked and roasted items seal quickly. This keeps moisture in and prevents flavour transfer, so you can cook an entire three-course meal using all levels of the oven at the same time.






3D CircoTherm®

Standard on all N50 Single and Double Ovens, our original and renowned 3D CircoTherm® system combines specially designed fan and :• back panel to deliver even cooking & baking on up to three levels – perfect results every time with no intermingling of flavours

4D CircoTherm®

Offering all the benefits of our original 3D system, 4D CircoTherm® combines a balanced stainless steel fan with a specially designed back panel and state-of-the-art electronic motor for optimum multi-level results. The electronic motor automatically switches between clockwise and anti-clockwise rotation every few minutes to deliver even better heat distribution throughout the cavity, facilitating cooking & baking on up to 4 levels simultaneously. 4D CircoTherm® is a more efficient and energy saving alternative to our 3D system and is standard on all N70 & N90 Single Ovens.





Not in the mood for roast pork raspberry

fish muffins?



PYROLYTIC SELF-CLEANING

The oven that almost cleans itself

When you activate the Pyrolytic Self-Cleaning cycle, high temperatures of up to 485°C turn baking, roasting and grilling spatter and residue into dust. Once the oven has cooled you can simply wipe it away with a cloth. That's all there is to it!



MAKE OVEN CLEANING A THING OF THE PAST.

You can choose from three cleaning settings:

- Light residue approx.
 1 hour, 15 minutes
- Medium residue approx.
 1 hour, 30 minutes
- Intensive cleaning approx.
 2 hours

PYROLYTIC **** FASY CLEAN® | Online | Online

PYROLYTIC SELF-CLEANING

As a safety measure, the oven door locks automatically until the oven has cooled to an acceptable level. The whole process only takes 1-2 hours depending on the degree of soiling (there are three programme options).

What's more, all of our pyrolytic ovens also come with our efficient EasyClean® cleaning aid. For a lightly soiled oven, when a pyrolytic cycle is not required, place approximately 400ml of water and a drop of washing-up liquid in the base pan and then select the EasyClean® programme. It softens baked-on residue so you can just wipe it down, for fast and uncomplicated oven cleaning.

SLIDE&HIDE® WITH PYROLYTIC SELF-CLEANING

With the stylish and innovative Slide&Hide® Single Oven now available with Pyrolytic Self-Cleaning, cleaning up those little spills won't eat into your dining time. From bubbled-over cheese to sizzling joints of meat, spatter and spillages are simply turned to dust, allowing you to quickly wipe away any residue once the oven has cooled.

ECO CLEAN®

In non-pyrolytic models we have the EcoClean® feature – a microfine ceramic bead coating on the oven's interior back or top, sides and back, depending on the model. It has a very large surface area, making it extremely absorbent. This highly efficient coating lasts for the entire lifetime of the oven and works once the oven reaches 140°C. Depending on how often you use your oven, there is a special EcoClean® cleaning program to get rid of accumulated soiling which may only be necessary 2-3 times a year. This uses a temperature of 275°C to remove burnt-on food without chemical cleaners.

BASE CLEAN

All ovens with the EcoClean® coating also have BaseClean to help clean the base of the oven – it softens burnt-on food with warm water. After the programme has finished you just have to wipe the base with a damp cloth.

A MATCH MADE IN NEFF

NOW ADD STEAM INTO THE MIX

A FULLY FUNCTIONING OVEN, MICROWAVE AND STEAMER IN ONE.

Partner your N50 Slide&Hide® Single
Oven with our N50 Compact Microwave
Combination Steam Oven to create a
seamless design with endless cooking
possibilities. Offering just what it says in
the name, you can use our N50 Compact
Microwave Combination Oven with
steam to combine hot air and steam to
microwave cooking in one single appliance.

As well as retaining vitamin and mineral content in food, steam cooking preserves flavours, ensuring that less salt additives are needed and a healthier dish is served. Whilst the internal microwave element enables food to be cooked quickly and dishes which benefit from oven baking/roasting are left beautifully fluffy on the inside and crisp on the outside.

WOW WITH SLIDE&HIDE®

Be the envy of all your dinner party guests with the N50 Slide&Hide[®] Single Pyrolytic Oven.

Our unique Slide&Hide® N50 Single Oven frees up kitchen space without sacrificing premium design. Featuring wider chrome trims with traditional control dials and an electronic display on selected models, our N50 ovens will make a style statement in any kitchen.

Full of innovative features, you can expect 3D CircoTherm® with ClipRail Telescopic Rails as a standard and make oven cleaning a chore of the past with the invaluable Pyrolytic Self-Cleaning function. Furthermore and unique to the N50 Collection only, our built-in Single Point Meat Probe monitors the core temperature of your joint and automatically switches the oven off when it's ready to be served. Ensuring that a succulent roast is always achieved has never been easier.



14 neff-home.com/uk/

HOME CONNECT



Bake and roast from anywhere

Manage our Wi-Fi connected N 90 and N 50 oven from anywhere you can take your smartphone – start roasting from afar and get a notification when dinner is ready. You can also speak to your oven via voice command and keep your messy hands on the cooking only.



⚠ Home Connect

Our innovative Home Connect app also provides you with a wealth of experimental recipes to ensure that you have enough inspiration to get creative in the kitchen and get the best out of your oven.

HOME CONNECT
IS COMPATIBLE
WITH AMAZON
ALEXA AND GOOGLE

ASSISTANT



cooking process.

VARIO STEAM®

Innovative steam assistance

Vario Steam® gives dishes just the right amount of moisture by adding steam at three intensity levels, for baking, roasting or just heating up.

Vario Steam® works by adding the desired amount of steam, through ducts in the back plate, during the CircoTherm®, top and bottom heat, bread baking and grilling modes. There are three pre set levels to provide a moist cooking environment and help achieve beautiful food that is perfectly succulent and tender. Dishes retain their colour, flavour and won't dry out during the

Perfectly concealed The water containe is easy to remove and refil

CRISP ON THE OUTSIDE, SUCCULENT ON THE INSIDE, DELICIOUS ALL ROUND.



FULL STEAM

A fully functioning oven and steamer in one

Our Full Steam ovens combine all the heating modes of a full-featured oven with those of a steam cooker, in one single appliance. Ideal for fish and vegetables, nutrients are retained and food is left beautifully flavoursome. It's easy to operate and also simple to refill the concealed one litre water container – press a button to open the front panel, remove the container, fill it and you're ready to steam ahead.



ADDED STEAM

New for N 50

Added Steam offers two preset levels of steam for combination with traditional cooking methods to achieve dishes with beautiful textures and flavours.



RAIL SYSTEMS

Comfortable and flexible access to your cooking

Lift hot dishes safely and comfortably out of the oven using our ComfortFlex Telescopic Rails, available within the N90 Collection. With the new design the rails don't get in the way – you can grasp the tray or dish from the side for more safety when handling.

Offering a similar benefit of allowing food to be pulled clear of the oven for optimum tasting and basting, our ClipRail Telescopic Rails feature a clip to release functionality and are available within our N50 Collection. You can also position our ClipRail Telescopic Rails on any level in the oven.





MEAT PROBE




Even the best sometimes need a little help

Take the guesswork out of cooking joints of meat with our clever built-in temperature probe feature. Available within the N90 Collection, the Multi Point Temperature Probe measures the joint's heat at three points to ensure it's perfectly cooked throughout. Offered within the N50 Collection is our Single Point Meat Probe that monitors the core temperature of your joint and automatically switches the oven off when it's ready to be served.



NEFF LIGHT®



Bright and brilliant

A unique feature by NEFF, which allows food to always be visible without opening the oven door. Most ovens have an internal lighting system, but when cooking, shelves and pans can reduce the



effectiveness of the light. NEFFLight® brightly illuminates even the farthest corner of the oven using LED bulbs. A special prism in the oven door distributes the light evenly at all levels, for a good view without dazzle.



COMPACT OVENS WITH MICROWAVE & MICROWAVE COMBINATION OVENS

Delicious results in rapid time

Designed to offer the ultimate flexibility, a compact oven with microwave functionality combines the benefits of conventional oven cooking and microwave cooking. Food is cooked quickly and dishes which benefit from oven baking & roasting are left beautifully fluffy on the inside and crisp on the outside.

OVENS WITH INTEGRAL MICROWAVE¹

Want an oven that offers more versatility for creative cooking? NEFF compact ovens with microwave give you all the benefits of a traditional single oven, but with the added power of a microwave. This combination of traditional oven-led cooking supported by low-medium power microwave (max. 360W) lets you speed up the cooking process while still delivering the flavours and results you'd expect from your NEFF oven.

In addition, you can also team the compact oven with microwave together with a traditional single NEFF oven, creating a highly versatile alternative to a double oven.

MICROWAVE COMBINATION OVENS¹

Wish your microwave gave crisp and brown results like your oven? That's exactly what you can get with a NEFF microwave combination oven. The combination of microwave (max. 600W) supported by hot air or grill functions enhance your cooking for golden and delicious meals. It's the speed you'd expect from a microwave but with the flavour and appearance you get from an oven or grill.

1 These models are designed to operate best in combination mode, so when heating using microwave only, it may be necessary to adjust cooking times.





FAST FOOD NEVER LOOKED, OR TASTED, SO GOOD

Invaluable in any Cookaholic's kitchen, our N90, N70 and N50 Collection Compact Microwave Ovens feature an integral microwave designed to cook your favourite dishes in a fraction of the time. Combined with the option of conventional oven cooking, our Compact Microwave Ovens offer the ultimate versatility to any meal. Also available within all collections is our range of Compact Full Steam Ovens to offer you a healthier approach to cooking with a more tasty result. All Compact Ovens have been designed to perfectly coordinate with our unique Slide&Hide® Single Ovens.

THE NEFF COFFEE CENTRE



Choose from Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte, milk froth, warm milk or hot water with the new coffee centre.



SIMPLE, FAST AND IRRESISTIBLE

personal touch to your kitchen with the new MyCoffee option. Eight individual beverages can be created, allowing you to select strength, size, temperature and share of milk before saving it under your guest name. Access to your personal coffee is fast and easy by pressing the



C17KS61N0 Coffee Centre with Home Connect

WARMING DRAWERS


WARMING DRAWERS EXPLAINED...

A warming drawer is a must for the serious cook. They're useful and versatile and help with the preparation and timing of meals. Easily accessible on smooth telescopic runners, they'll not only warm plates before serving up, but keep pre-cooked food warm too. As well as warming, they can be used to defrost delicate foods, melt chocolate, make yoghurt and prove dough.

Designed to coordinate with other NEFF appliances, we offer our Warming Drawers across both the N90 and N50 collection in two sizes – 14cm high, which holds 12 plates, and 29cm high, which can hold 40 plates. Also available within the N90 Collection is our 14cm fully extendable Accessory Drawer, ideal for additional kitchen storage.



N17XH10N0B N90 14cr High Vacuum Drawer




N17XH10N0 N90 29cm High Warming Drawer



N17HH10N0B N90 14cm High Warming Drawer



N17HH11N0B N90 14cm High Warming Drawer with Handle



N17ZH10N0 N90 14cm High Accessory Drawer

VACUUM DRAWER

A must have for any passionate chef, our tailor-made vaccum-seal Sous Vide chamber system can intensify flavours that highlight your finest ingredients. The NEFF Vacuum Drawer turns into your practical helper for vacuum-sealed gravy, sauces, herbs, cut fruit and vegetables in appetizing portions to stock up your fridge and freezer. Further benefits include showcasing your efforts in a jar so basil turns into long-lasting pesto and baby food into handy 'to go' portions, plus, the NEFF Vacuum Drawer becomes your handy extension for flexible sealing of larger jars and plastic containers.



N1AHA02N0B N50 29cm High Warming Drawer

N1AHA01N0B N50 14cm High Warming Drawer

CONTROL DISPLAY

A design for every Cookaholic

Our unique range of Slide&Hide® Ovens are available with 5 different control displays for navigating the cooking features. We offer everything from a large Full Touch TFT control to a traditional dial with electronic display, so you can decide on a design that suits your style of cooking.

N 90: Full Touch Control

Intuitive display with fingertip control

Innovative Full Touch Control operation revolutionises convenience within our premium N90 Collection. The control panel sets new standards with fast navigation and simple, precise operation by touching or swiping the large highresolution colour TFT display.



TFT colour graphics display

N 90: Medium Shift Control

Offering the best of both

Also available within our N90 Collection is our trusty yet stylish Medium Shift Control that offers both a medium Touch Control display along with a shift panel to aid navigation.



N70: Small Shift Control

Premium yet practical

Often a popular choice for control display, our Small Shift Control is available within our N70 Collection and offers the best of a high resolution display with a shift panel button for precise and easy navigation.


N 50: Electronic Control with Medium LCD Display

Traditional yet precise navigation

Our N50 Collection offers the convenience and precision of a traditional control dial alongside a stylish large LCD Display. The oven proposes a suitable temperature when a particular function is selected and displays the temperature digitally. Other display features include a control panel lock and, if left unadjusted for a period of time, the oven will switch itself off as a safety measure.







N 50: Small LCD Display

Simplicity at its best

An alternative control display offered within our N50 Collection. Featuring traditional controls dials alongside a small LCD display, navigating your oven can be as simple as you like.

THE PERFECT COMBINATION

Mix and match your appliances

Create your perfect kitchen by choosing your very own appliance combination and cooking features to suit your lifestyle. With our SeamlessCombination® strips you can seamlessly combine our N 90 and N 70 Collection of single ovens and compact appliances to create a sleek and stylish finish.

N 90

C27CSS22H0B

CircoTherm® Compact Over with Full Touch Control N 90



Z11SZ60X0

N17HH10N0B

B58VT68H0B

Slide&Hide® Single Oven with Pyrolytic Self-Cleaning, Vario Steam and Full Touch Control N 90



Z11SZ80X0

N17HH20N0B

C27CS22H0B

Compact Oven with Shift Control Fascia 4.1" N 90



Slide&Hide® with Single Pyrolytic Oven and with Shift Control Fascia 4.1" N 90

B57CS24H0B

N 70

C17MR02N0B



Warming Drawer N 70 and N 90

B57CR22N0B

Slide&Hide® Single Oven with Pyrolytic Self-Cleaning with Shift Control Fascia 2.5" N 70



Z11SZ80X0

N17HH20N0B Warming Drawer N 90/N 70

with 45cm Compact

C17MR02N0B

Compact Combination Oven with Microwave with Shift Control Fascia 2.5" N 70



Slide&Hide® Single Pyrolytic Oven with Shift Control Fascia 2.5" N 70

N 50

C1APG64N0B

with White LCD Display N 50



Warming Drawer N 50

B5ACM7HH0B

Slide&Hide® Single Pyrolytic Oven with White LCD Display N 50



C1APG64N0B

Compact Microwave Combination Steam Oven with White LCD Display N 50



B5ACM7HH0B Slide&Hide® Single Pyrolytic Oven with White LCD

COOKING WITH A NEFF OVEN

KEY FEATURES



CIRCOTHERM®

The CircoTherm® Power Boost function speeds things up even more when cooking for short periods of time – just put the food in and start the



CIRCOTHERM® GENTLE

Optimised for gentler cooking and baking on one level. It's perfect for frozen or convenience foods, bread, cakes and meats. Available on all electronically controlled ovens.



VARIO STEAM®

Vario Steam® gives dishes just the right amount of moisture by adding steam at three intensity levels, for baking, roasting or just heating up. Foods come out with more intense flavour and an appetising appearance.



SOUS VIDE

By cooking at very low temperatures (55°C -60°C) Sous Vide seals in flavour and achieves beautiful uniform results. With the option to cook in selected single or compact steam ovens.



BAKING AND ROASTING ASSISTANT

This innovative assistant makes food preparation even easier and more convenient. The Baking and Roasting Assistant serves up a cooking suggestion at the press of a button. It also recommends the ideal heating mode, temperature and time, to ensure perfect results.



MEAT PROBE



The Multi Point Meat Probe measures the joint's heat at three points and the Single Point Meat Probe measures in one point, ensuring the right core temperature is reached, so you can take the roast out when it's ready.



FULL STEAM

Make your favourite dishes healthier by locking in food's nutrients and flavour with our Full Steam function. It's easy to operate and also simple to refill the one litre water container – press a button to open the front panel, remove the container, fill it and you're ready to steam ahead.



Control your oven directly from a Smart Device App or Voice Command

OVEN CLEANING FUNCTIONS



PYROLYTIC SELF-CLEANING

Pyrolytic cleaning is a self-cleaning system for ovens. The process superheats the oven to approximately 485°C, which burns off any deposits from baking, roasting and grilling. This creates a perfectly clean oven and a residue of fine dust that's easily removed with a damp cloth.



OVEN CLEANING

A special electronic setting designed to keep EcoClean® surfaces inside the oven as clean as possible. Used on a regular basis, it can keep the oven's interior lining remarkably clean with minimal maintenance required.



BASE CLEAN

Base Clean helps clean the bottom of the oven by softening dirt with warm water. After the programme has finished you just have to wipe the base with a damp cloth.



EASYCLEAN®

For a lightly soiled oven, put approximately 400ml of water and a drop of washing-up liquid in the base pan and then select the EasyClean® programme. It softens baked-on residue so you can just wipe it down, for fast and uncomplicated



DESCALING

All NEFF steam appliances contain a descaling programme which can be set according to the hardness of the water.



FCOCI FAN®

EcoClean® is a microfine ceramic bead coating on the oven's interior back or top, sides & back, depending on the model. It has a very large surface area, making it extremely absorbent. It absorbs fat droplets and keeps the inside of the

COOKING FUNCTIONS



CIRCOTHERM®

The fan draws air from the interior of the ov then heats it up and forces it back into the cavity to ensure even heat distribution. Cook on four levels within the N 90 and N 70 Collection and 3 levels within the N 50 Collection.



CIRCOTHERM® INTENSIVE

Uses a combination of CircoTherm® and bottom eat, ideal for foods that need a crispy underside like pizzas or speciality breads. It can also be used for one stage pastry such as lemon meringue pie, eliminating the need for blind baking.



TOP/BOTTOM HEAT

Providing conventional cooking heat sources top and bottom of the oven. Heat travels to the centre of the oven by natural conduction. Ideal for baking pastries and scones.



CIRCO ROASTING

An ideal function for cooking meat and poultry for a rotisserie result where the fan and top element alternatively come on.



CENTRE SURFACE GRILL

You can use just the centre section of the grill for smaller quantities.



BREAD BAKING

Bread baking temperature varies between 180°C and 220°C. Ideally suited to baking crusty bread with an open texture. Up to three levels of bread can be baked at the same time.



LOW TEMPERATURE COOKING

A special setting for hob-sealed prime cuts of meat and poultry. Meat/poultry is placed in a pre heated dish and transferred into the oven. The low temperature setting uses a fixed temperature to gently tenderise without overcooking, resulting in meat/poultry that is juicy and melts in the mouth.



REHEAT

Reheat allows you to gently warm dishes again and thanks to the moisture in the oven, they will look and taste freshly prepared.





CONVENTIONAL HEAT GENTLE

This setting heats up the centre of the oven for single shelf cooking. The oven maintains its average temperature for gentler cooking by reducing the thermostat cycles and using residual heat as part of the process.



FULL SURFACE GRILL

The grill element is situated in the oven roof. It is thermostatically controlled and will cycle on and off to maintain the required temperature.



The CircoTherm® fan circulates air through the oven to speed up defrosting times while retaining food colour and moisture. Ideal for delicate foods as well as fish and poultry.



BOTTOM HEAT

Providing heat from the bottom of the oven, this method is ideal for pizza bases and pastry cases to create a crispy underside or for bain marie and



KEEP WARM

An ideal setting for keeping food warm without drying it out before serving. Typically set between 66°C to 100°C.



PLATE WARMING

Hot air is circulated at up to 65°C to safely warm plates and service dishes in preparation for dinner.



DOUGH PROVING

This function provides a warm, moist environment which gives perfect conditions for proving any yeasted dough.

AUTOMATIC SAFETY SWITCH OFF

For electronic ovens only, this feature will automatically cut in if no changes to the settings on the appliance have been made in a long time, giving you complete peace of mind.

Temperature range	Automatic switch off after
Under 140°C	73 hours
141 – 200°C	6 hours
201 – 250°C	3 hours
251°C	2 hours
Personal State of the Control of the	

SLIDE&HIDE® **PYROLYTIC OVENS** WITH VARIOSTEAM®

The ultimate choice for creative Cookaholics

Whatever your specialities, we've designed an oven to inspire even the most experimental cooks. Combining our unique Slide&Hide® disappearing door design with VarioSteam® and Pyrolytic Self Cleaning, creative cooks can achieve succulent meat, beautifully crusty bread and flavoursome bakes without worrying about roasting spatter and spillages.

SLIDE&HIDE® **OVENS WITH** PYROLYTIC CLEANING

The only oven with a disappearing door is cleaner than ever

Our unique Slide&Hide® ovens now come with Pyrolytic Self Cleaning function. Using a high temperature programme to burn food residue to dust, which can be quickly wiped away once the oven has cooled, oven cleaning has now become a thing of the past. From bubbled over cheese or sizzling joints of meat, our Pyrolytic ovens give you more time to concentrate on your next creation.



B58CT68H0B



VarioSteam®

B58VT68H0B



Pyrolytic Self Cleaning

KEY FEATURES



Pyrolytic Oven

Pyrolytic Self Cleaning



Slide&Hide® door

STATE OF					
Full Touch Control	Slide&Hide®	W1-F1	Cooking Functions	Neff Light	Multi Point Meat Probe
	(r	<u>÷</u>	15		
Bake and Roast Assist	Comfort Flex	Pyrolytic	CircoTherm®	CircoTherm® Gentle	
Energy	Efficie				
A	A STATE			See N	



Full Touch with Large colour TFT Clear Text display Shift Control with TFT Clear Text display Neff Design Retractable controls

CONTROLS Electronic control

Temperature proposal with display Heating up indicator/ Residual heat indicator

Control panel lock/ Safety switch off

Automatic programmes SPECIAL FEATURES

Door type

Soft open doo Home Connect

Telescopic Rail

Multi Point Temperature Probe

Single Point Meat Probe Rapid heat up

Baking and roasting assistant

FEATURES

Electronic clock / times

Full glass inner door

Glazed door (Quadruple/Triple/Double) Internal lighting

Water tank empty indicator

COOKING FUNCTIONS

CircoTherm®

CircoTherm® Gentle / Top/bottom heat Gentle Top/bottom heat / Bottom heat

Circo Roasting

Full surface grill/ Centre Surface Grill

Bread baking

Low temperature cooking

Pizza setting/ CircoTherm® Intensive

Defrost Dough Proving

Plate warming/ Keep Warm COOKING FUNCTIONS WITH STEAM

Vario Steam®

Added Steam

Dough Proving

Reheat

OVEN CLEANING

Pyrolytic cleaning

Easy Clean® / Base Clean

Eco Clean Surface Cleaning setting

Descaling programme

STANDARD ACCESSORIE

Wire shelf Universal pan

ENERGY EFFICIENCY

Energy efficiency index Energy efficiency class

Energy consumption per cycle CircoTherm kWh Energy consumption per cycle conventional kWh

Oven capacity Time to cook standard load

			INFOR	FOR MORE RMATION PI SIT NEFF-HI COM/UK	JI 12.					
N 90t B58VT68H0B	N 90t B58CT68H0B -	N 90s B57VS24H0B -	N 90s B57CS24H0B -	N 70 B57VR22N0B	N 70 B57CR22N0B -	N 50 B5AVM7HH0B	N 50 B5AVH6AH0B	N 50 B5ACM7HH0B -	N 50 B5ACH7AH0B -	N 50 B6ACH7HH0B -
٠	•	Medium colour	Medium colour	Small	Small	•	•	•	•	•
• / • • / • • / • 14	• / • • / • • / •	• / • • / • • / • 14	• / • • / • • / •	• / • • / • • / • 14	• / • • / • • / •	• / • • / • • / • • / • 15	• / • • / • • / • 15	• / • • / • • / •	• / • • / • • / •	• / • • / • • / •
Slide&Hide® with Rotating Handle	Slide&Hide [®] with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide [®] with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide [®] with Rotating Handle	Slide&Hide® with Rotating Handle	Slide&Hide [®] with Rotating Handle
:	1 x ComfortFlex	•	•	•	•	• 1 x Clip rail	•	• 1 x Clip rail	•	● 1 x Clip rail
	•	•	•	•	•	•		•		
White TFT Display	White TFT Display	White TFT Display	White TFT Display	White TFT Display	White TFT Display	White LCD Display	White LCD Display	White LCD Display	White LCD Display	White LCD Display
Quadruple NeffLight® & 1 x 3W LED	Quadruple	Quadruple 1 x 3W LED	Quadruple 1 x 35W Halogen	Quadruple 1 x 3W LED	Quadruple 1 x 35W Halogen	Quadruple 1 x 25W Halogen	Quadruple 2 x 25W Halogen	Quadruple 1 x 25W Halogen	Quadruple 1 x 25W Halogen	Quadruple 1 x 25W Halogen
14 + 2	15	• 13 + 2	13	• 12 + 2	12	nalogell 8	naiogeii 8	nalogell 8	naiogen 8	naiogeri 8
4D	4D	4D	4D	4D	4D	3D	3D	3D	3D	3D
•/•	•/•	•/•	•/•	•/•	•/• •/•	•/	•/	•/	•/	•/
•/•	• / •	• / •	•/•	• / •	•/•	• /	• /	• /	• /	• /
•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•
•	•	•	•		•					
•/•	•/•	/●		/●						
•		•		•						
:		•		•		•	•			
•	•	•	•	•	•	•	•	•	•	•
•/	• /	•/	•/	• /	•/	• /	•/	•/	•/	• /
-		·					·			
2	2	2	2	2	2	2	2	2	2	2
87.1	87.1	87.1	87.1	81.2	81.2	95.3	95.3	95.3	95.3	95.3
A 0.74	A 0.74	A 0.74	A 0.74	A+ 0.69	A+ 0.69	A 0.81	A 0.81	A 0.81	A 0.81	A 0.81
0.90	0.90	0.9	0.9	0.87	0.87	1.04	1.04	1.04	1.04	1.04
71 45	71 45	71 44	71 44	71 44	71 44	71 58	71 58	71 58	71 58	71 58
1290	1290 ding the EN50304	1290	1290	1290	1290	1290	1290	1290	1290	1290
Micasul ed accor	ang the LIVSUSU2	1, 03/2014								2

SLIDE&HIDE® SINGLE OVENS WITH FULL STEAM


All the benefits of a steamer and a conventional oven

Our Full Steam ovens, within the N 90 collection, allow you to cook with steam as a standalone function. Easy to operate and simple to fill via a concealed one litre container, our Full Steam ovens allow you to cook moist, flavoursome and healthier meals. For added benefit, our VarioSteam® function also comes as standard with the N90 Full Steam Oven.

SLIDE&HIDE® SINGLE OVENS WITH **VARIOSTEAM®**

Everything you need to cook up a feast

Our Slide&Hide® with VarioSteam® ovens enhance your cooking by injecting steam whilst using traditional cooking functions to intensify your dish. Ideal for achieving succulent joints of meat, perfecting crusty bread and reheating previously cooked meals.



The only oven with the disappearing door

Inspired by the most demanding Cookaholics, our unique Slide&Hide® disappearing oven door is designed to get passionate cooks closer to their cooking. With the Slide&Hide® door retracting smoothly under the oven cavity, this oven is ideal for small kitchens with big flavours - perfect for tasting, basting and sampling.



B48FT78H0B









CircoTherm®





CircoTherm®



KEY FEATURES



KEY FEATURES



KEY FEATURES





1000年1月18日 1000年1月							i	i	i——i	
		-	-	-		-				
《西班通》		=	=	=	=					
	100 St 100 St	SOURIERO		75 5724		1988 S. C.	BONE WEST VALUE	15 S.		A SHE SHE
COLLECTION	N 90t	N 90s	N 90s	N 90s	N 70	N 70	N 50	N 50	N 50	N 50
BLACK GLASS WITH	B48FT78H0B	B47FS34H0B	B47VS34H0B	B47CS34H0B	B47VR32N0B	B47CR32N0B	B4AVH1AH0B	В4АСМ5ННОВ	B4ACF1AN0B	B3ACE4HN0B
STEEL TRIM OPERATION										
Full Touch with Large colour	•									
TFT Clear Text display Shift Control with TFT Clear		Medium	Medium	Medium						
Text display		colour	colour	colour	Small	Small				
Neff Design Retractable controls							•	•	•	•
CONTROLS										
Electronic control	•	•	•	•	•	•	•	•		
Temperature proposal with display	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•		
Heating up indicator/ Residual heat indicator	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	• /	•/
Control panel lock/ Safety	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	• /	• /
switch off Automatic programmes	30	30	14	3,5	14	0,0	15	0,0	,	- ,
SPECIAL FEATURES	30	30	1-4		1-4		15			
	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®	Slide&Hide®
Doortype	with Rotating Handle	with Rotating Handle	with Rotating Handle	with Rotating Handle	with Fixed Handle					
Soft open door	•	•	•	•	•	•				
Home Connect	• 1 x	• 1 x	• 1 x	• 1 x			•	•		
Telescopic Rail	ComfortFlex	ComfortFlex	ComfortFlex	ComfortFlex			1 x Clip rail	1 x Clip rail		1 x Clip rail
Multi Point Temperature Probe	•									
Single Point Meat Probe Rapid heat up		•	•	•	•	•		•		
Baking and roasting assistant	•	•	•	•						
FEATURES										
Electronic clock / timer	White TFT	White LCD	White LCD	White LCD	White LCD					
Full glass inner door	Display	Display •	Display	Display •	Display •	Display •	Display •	Display •	Display •	Display •
Glazed door (Quadruple/	Triple	Triple	Triple	Triple	Triple	Triple	Triple	Triple	Triple	Triple
Triple/Double) Internal lighting	NeffLight® &	1 x 3W LED	1 x 3W LED	1 x 35W	1 x 3W LED	1 x 35W	1 x 25W	1 x 25W	1 x 25W	1 x 25W
Water tank empty indicator	1 x 3W LED	•	• •	Halogen	• •	Halogen	Halogen •	Halogen	Halogen	Halogen
COOKING FUNCTIONS	13 + 4	12 + 3	13 + 2	13	12	12	8	8	6	7
CircoTherm®	4D	4D	4D	4D	4D	4D	3D	3D	3D	3D
CircoTherm® Gentle / Top/ bottom heat Gentle	•/•	•/•	•/•	•/•	•/•	•/•	•/	•/	•/	•/
Top/bottom heat /	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•
Bottom heat Circo Roasting	•	•	•	•	•	•	•	•	•	•
Full surface grill/ Centre	•/•	•/•	•/•	•/•	•/•	•/•	• /	• /	• /	• /
Surface Grill Bread baking	•	•	•	•	•	•	•	•		
Low temperature cooking	•	•	•	•	•	•				
Pizza setting/ CircoTherm® Intensive	•	•	•	•	•	•	•	•	•	•
Defrost	With steam	With steam	•	•						
Dough Proving				•		•				
Plate warming/ Keep Warm	•/•	/●	/•		/ •					
COOKING FUNCTIONS WITH STEAM										
Sous Vide Function	•									
100% steam	•	•								
Vario Steam®	•	•	•		•					
Added Steam Dough Proving							•			
Reheat	•	•	•		•					
OVEN CLEANING										
Pyrolytic cleaning										
Easy Clean® / Base Clean	/•	/•	/•	/•	/•	/•	, .	/•	, .	• /
Eco Clean Surface Cleaning setting	roof/back/sides	roof/back/sides	roof/back/sides	roof/back/sides	roof/back/sides	roof/back/sides	back	roof/back/sides	back	back
Descaling programme	•	•	•		•		•			
STANDARD ACCESSORIES										
Wire shelf	2	2	2	2	2	2	2	2	2	2
Universal pan	1	1	1	1	1	1	1	1	1	1
Perforated (S,XL)/Unperforated steam container (S)	S, XL/S	S, XL/S								
ENERGY EFFICIENCY ¹										
Energy efficiency index	81.2	81.2	87.1	87.1	81.2	81.2	95.3	95.3	95.3	95.3
Energy efficiency class Energy consumption per	A+	A+	Α 0.7/	Α 0.7/	A+	A+	Α 0.01	Α 0.01	Α 0.01	Α 0.01
cycle CircoTherm kWh	0.69	0.69	0.74	0.74	0.69	0.69	0.81	0.81	0.81	0.81
Energy consumption per cycle conventional kWh	0.87	0.87	0.9	0.9	0.87	0.87	1.04	1.04	1.04	1.04
Oven capacity L	71	71	71	71	71	71	71	71	71	71
Time to cook standard load mins	44	44	44	44	44	44	58	58	58	58
Largest baking sheet area cm²	1290	1290	1290	1290	1290	1290	1290	1290	1290	1290

Measured according the EN50304, 65/2014

SINGLE PYROLYTIC OVENS

The oven that almost cleans itself

When oven scrubbing simply isn't an option, our single pyrolytic ovens are the only choice for foodies who love to get creative in their kitchen. Simply activate the Pyrolytic Self Cleaning function to tackle tough splatter and spillages. Featuring a standard dropdown door, our single Pyrolytic ovens also feature the same fascia design as our Slide&Hide® range.

SINGLE **OVENS**

Cook a threecourse meal in one go with CircoTherm®

Featuring our unique CircoTherm® technology, a NEFF oven is designed with social dining in mind. With hot air drawn in from the oven via a stainless steel fan, each shelf is effectively wrapped to ensure that there's no intermingling of flavours across individual dishes. Our single ovens feature a standard drop down door and the same contemporary fascia design as our Slide&Hide® range.

CircoTherm®

N 70



Full Touch with Large colour TFT Clear Text

Shift Control with TFT Clear Text display

Neff Design Retractable controls

Temperature proposal with display Heating up indicator/ Residual heat

Control panel lock/ Safety switch off

Drop Dov

White TF7

Quad

1 x 35W H

CONTROLS

Electronic control

Automatic programmes

Multi Point Temperature Probe Single Point Meat Probe Rapid heat up

Baking and roasting assistant

Glazed door (Quadruple/Triple/Double)

CircoTherm® Gentle / Top/bottom heat Top/bottom heat / Bottom heat

Full surface grill/ Centre Surface Grill

Pizza setting/ CircoTherm® Intensive

COOKING FUNCTIONS WITH STEAM

Electronic clock / timer

Full glass inner door

Internal lighting Water tank empty indicator COOKING FUNCTIONS

CircoTherm[®]

Circo Roasting

Bread baking

Vario Steam®

Added Steam

Dough Proving

OVEN CLEANING Pyrolytic cleaning

Cleaning setting Descaling programme

Wire shelf Universal pan ENERGY EFFICIENCY¹ Energy efficiency index Energy efficiency class

Oven capacity

Time to cook standard load Largest baking sheet area

Measured according the EN50304, 65/2014

Easy Clean® / Base Clean

STANDARD ACCESSORIES

Reheat

Defrost Dough Proving

Low temperature cooking

Plate warming/ Keep Warm

SPECIAL FEATURES

Door type

FEATURES

Soft open door Home Connect Telescopic Rail

DESIGNED DINING IN MIND

Featuring our unique CircoTherm® technology, NEFF ovens are perfectly designed for busy family life and sociable dining. With the option to cook different dishes across all four levels without any intermingling of flavours, each course can be cooked at the same time.

B27CR22N1B

B17CR32N1B

Self Cleaning



CircoTherm®

KEY FEATURES







KEY FEATURES







Similar Novin					
70 22N1B	N 50 B2ACH7HH0B		N 70 B17CR32N1B	N 50 B1ACE4HN0B	N 50
all	•		Small	•	B1ACE4HW0B
) (• (• (• (• (• (• (• (• (• (•	•	1	• / • • / • • / •	•/	•/
wn Door	Drop Down Door	- 14	Drop Down Door	Drop Down Door	Drop Down Door
	1 x Clip rail			1 x Clip rail	1 x Clip rail
			•		
T Display ruple	White LCD Display ● Quadruple		White TFT Display ● Triple	White LCD Display ● Double	White LCD Display ● Double
Halogen	1 x 25W Halogen		1 x 35W Halogen	1 x 25W Halogen	1 x 25W Halogen
2	8	200	12	6	6
D	3D	No. of the last	4D	3D	3D
•	• /		•/•	• /	•/
· •	•/•		•/•	•/	• /
•	•	100/50	•	•	•
' •	•/		•/•	•/	•/
	•		•		
<u>'</u>	•	15000		•	•
			·	·	•
•		100000	•		
		1000			
		NEW YORK			
		State of			
,	• /	(E30)	/●	•/	•/
	•/	10000	roof/back/sides	back	back
•	•	200	•		
		(2500)			
,	2	5.0	2	2	2
2	1	MODE:	1	1	1
		30000			
.2	95.3		81.2	95.3	95.3
+	A	10 E 36	A+	A	A
59	0.81	164	0.69	0.81	0.81
37	0.99	200	0.87	0.97	0.97
4	71 50	13/2/20	71 44	71 44	71 44
90	1290	165 25	1290	1290	1290
TO NOTE	10-732			STATE VICES	安康/图/ADD
		THE RESERVE			

COMPACT COMBINATION OVEN WITH FULL STEAM

Perfect for health conscious Cookaholics

Our compact Full Steam ovens are the ideal choice for cooks who love to prepare fresh, seasonal produce. As well as retaining vitamin and mineral content in food, steam cooking preserves flavours, ensuring that less salt and oil additives are needed. Designed to complement our selected Slide&Hide® ovens range, SeamlessCombination® mounting kits allow you to 'mix and match' your own sleek and stylish appliance wall.



CircoTherm®

B	> 0000000	LATU	医罗克马马								
	Cooking Functions	CircoTherm®	CircoTherm® Gentle	Vario Steam	Full Steam	Full Touch Control	Multi Point Meat Probe	Bake and Roast Assist	Sous Vide	Sabbath	W1-F1
	12	CircoTherm®	(1)		(C)	4 ···∩▶	• • •	>> @ @%	8		<u> </u>
	כו		16.0		~~						
	Energy	Efficier	nt								
	ΙA [†]		411								






COLLECTION	N 90t	
ТҮРЕ	COMPACT STEAM OVEN	
BLACK GLASS WITH STEEL TRIM	C18FT56H0B	
Full Touch with Large colour TFT Clear Text display	•	100
Shift Control, Medium colour TFT Clear Text display		100
NEFF Design Retractable controls, LCD display CONTROLS		100
Electronic control	•	3
Temperature proposal with Display Heating up indicator/ Safety switch off	•/•	8
Automatic programmes	30	80
SPECIAL FEATURES Home Connect	•	100
Door Type	Drop Down Door	100
Soft close / open door	•/•	8
MultiPoint Temperature Probe Baking and roasting assistant	•	8
FEATURES		88
Display Type Full glass inner door	White Clear Text	8
Glazed door (Quadruple/Triple/Double)	Triple	8
Internal lighting	1 x LED	100
Water tank empty indicator COOKING FUNCTIONS		8
Hot Air	•	100
Hot Air Gentle Top/bottom heat	•	8
Conventional heat Eco	•	8
Fan & Grill	•	8
Full surface grill/ Centre surface grill Bread baking	• / •	8
Bottom heat	•	10
Low temperature cooking Pizza setting/ CircoTherm® Intensive	•	8
Defrost	Using steam	8
Dough Proving	Using steam	В
Plate warming/ Keep warm Microwave	•/•	В
Microwave combinable		8
VarioSteam® combinable with one of 5 functions 100% Steam	•	я
VarioSteam®		в
Added Steam		8
Sous Vide cooking Reheating	•	8
OVEN CLEANING		8
Easy Clean®/ Base Clean EcoClean Surfaces	● / ● roof / back / sides	в
Cleaning setting	TOOT / DACK / Sides	В
Descaling programme	•	B
STANDARD ACCESSORIES Wire shelf	1	8
Universal pan	1	B
Insert grid Perforated steam container (size S/M/L/XL)	1 v S- 1 v VI	
Unperforated steam container (size S/M/L/XL)	1 x S; 1 x XL 1 x S	
Ceramic Glass Base		
ENERGY EFFICIENCY ¹ Energy efficiency index	81.3	
Energy efficiency class	A+	
Energy consumption per cycle CircoTherm (kWh) Energy consumption per cycle conventional (kWh)	0.61 0.73	
Oven capacity (L)	47	
Time to cook standard load (mins)	41	

Largest baking sheet area (cm2)



231		
額		
趨	(13)	
88		**************************************
89.		i i
	SECULIAR SECU	
	N 90	N 50
8		COMPACT
98		MICROWAVE
8	COMPACT STEAM	& STEAM
а.	OVEN	COMBINATION
9		OVEN
8	C17FS32H0B	C1APG64N0B
8		
8		
9		
8	•	
98		•
8		
8	•	•
и.	- / -	2 / 2
а.	•/•	•/•
а.	•/•	•/•
8	30	30
8		
8	•	
1	Drop Down Door	Drop Down Door
29	Drop Down Door	וטטט וואטט קטוט
1	•/•	
8		
	•	
8		
10	White Clear Text	White LCD display
8	Willie Cical Text	Willie ECD display
8	•	
8	Triple	Triple
8	1 x LED	1 x 2W LED
8	•	
8-		
в.		
8	•	•
8	•	
8	•	
8	•	
8	•	•
8	•/•	Quartz /
8	•/•	Qual LZ /
8	•	
8	•	
9	•	
8	•	
8	Using steam	
8	-	
8	Using steam	
8	/●	
8		•
		•
	•	
9		
Į.		
1	•	
1		•
	•	
Ø		
	0/0	
g.	•/•	
	roof/back/sides	back
	•	•
8	•	•
8	1	1
9	1	
		Glass tray
		1
	1 x S; 1 x XL	1 Tray
	1 x S	
	01 2	
	81.3	
	A+	
	0.61	
	0.73	
H	47	36
	41	

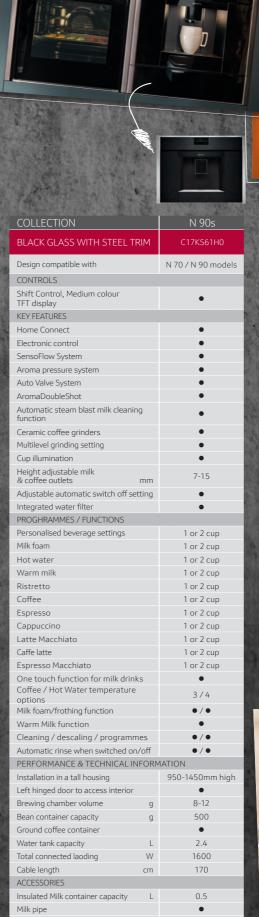



Find out

Designed with true coffee connoisseurs in mind, our compact coffee centres are the ultimate addition to any sociable kitchen. From Cappuccinos with friends to that essential morning Espresso, use the MyCoffee option to select up to 8 firm favourites.



¹ Measured according the EN50304, 65/2014. ² For further information on inverter technology, please go to www.neffhome.com/uk. ³ For Inverter models, the maximum setting offers a time limited boost option for heating liquids To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

COMPACT OVENS WITH MICROWAVE & MICROWAVE COMBINATION OVENS

Delicious results in rapid time

Designed to offer the ultimate flexibility, a compact oven with microwave functionality combines the benefits of conventional oven cooking and microwave cooking. Food is cooked quickly and dishes which benefit from oven baking & roasting are left beautifully fluffy on the inside and crisp on the outside.

C28MT27H0B Compact Oven with Microwave

N 90

FUNCTION AND SPEED COMBINED

Self Cleanin

ull Touch Control



 $CircoTherm^{\circledR}$

KEY FEATURES



Efficient



Ovens with integral Microwave¹

Want an oven that offers more versatility for creative cooking? NEFF compact ovens with microwave give you all the benefits of a traditional single oven, but with the added power of a microwave. This combination of traditional oven led cooking supported by low medium power microwave (max. 360W) lets you speed up the cooking process while still delivering the flavours and results you'd expect from your NEFF oven.

In addition, you can also team the compact oven with microwave together with a traditional single NEFF oven, creating a highly versatile alternative to a double oven.

Microwave Combination Ovens¹

Wish your microwave gave crisp and brown results like your oven? That's exactly what you can get with a NEFF microwave combination oven. The combination of microwave (max. 600W) supported by hot air or grill functions enhance your cooking for golden and delicious meals. It's the speed you'd expect from a microwave but with the flavour and appearance you get from an oven or grill.

1 These models are designed to operate best in combination mode so when heating using microwave only, it may be necessary to adjust cooking times.



						E 100	
一个。		EOE	EOE				
COLLECTION	N 90s	N 90t	N 90s	N 90s	N 70	N70 touch	N 50
TYPE	COMPACT OVEN	COMPACT OVEN WITH MICROWAVE	COMPACT OVEN WITH MICROWAVE	COMPACT OVEN WITH MICROWAVE	COMPACT OVEN WITH MICROWAVE	COMPACT MICROWAVE	COMPACT MICROWAVE COMBINATION OVEN
BLACK GLASS WITH	C27CS22H0B	C28MT27H0B	C27MS22H0B	C17MS32H0B	C17MR02N0B	C17UR02N0B	C1AMG84N0B
STEEL TRIM OPERATION							
FullTouch with Large colour TFT display		•					
ShiftControl with medium colour TFT display	•		•	•			
ShiftControl with small					•	Touch control	
TFT display Neff Design Retractable							•
controls CONTROLS							
Electronic control	•	•	•	•	•	•	•
Temperature proposal with Display	•/•	•/•	•/•	•/•	•/•		
Heating up indicator/ Safety switch off	•/•	•/•	•/•	•/•	•/•	/●	/●
Automatic programmes		14	14	14	14	7	15
SPECIAL FEATURES							
Home Connect	•	•	•	•			
Door Type Soft close / open door	Drop Down Door ● / ●	Drop Down Door	Drop Down Door ● / ●	Drop Down Door ● / ●	Drop Down Door ● / ●	Drop Down Door	Drop Down Door
Telescopic Rail		Comfort Flex	0/0	0,0	• • • • • • • • • • • • • • • • • • • •		
MultiPoint Temperature		•					
Probe Baking and roasting assistant	•						
FEATURES							
Display Type	White Clear Text	White Clear Text	White Clear Text	White Clear Text	White Clear Text	White Clear Text	White LCD display
Full glass inner door	•	•	•	•	•	•	
Glazed door (Quadruple/Triple/Double)	Quadruple	Quadruple	Quadruple	Quadruple	Quadruple	Double	Triple
Internal lighting	1 x Halogen	1 x LED	1 x LED	1 x Halogen	1 x LED	1 x LED	1 x 1W LED
COOKING FUNCTIONS							
Hot Air Hot Air Gentle	•	•	•	•	•		•
Top/bottom heat	•	•	•	•	•		
Conventional heat Eco	•	•	•	•			
Fan & Grill	•	•	•	•	•		•
Full surface grill/ Centre surface grill	•/•	•/•	•/•	•/•	•/•		•/
Bread baking	•						
Bottom heat	•	•	•	•			
Low temperature cooking Pizza setting/ CircoTherm®	•	•	•	•			
Intensive	•	•	•	•			•
Defrost Dayah Provins	•						
Dough Proving Plate warming/ Keep warm	•	•/•	• /	• /	•/		
Microwave		•	•	•	•	•	•
Microwave combinable		•	•	•	•		•
OVEN CLEANING							
Pyrolytic cleaning Easy Clean®/ Base Clean	• /	• /	• /	•/•			
EcoClean Surfaces			,	roof / back / sides			
Cleaning setting	•	•	•	•			
STANDARD ACCESSORIES							
Wire shelf Universal pan	1	1	1	1	1	Glass tray	
Ceramic Glass Base						Glass tray	•
STANDARD ACCESSORIES							
Energy efficiency index	81.3						
Energy efficiency class	A+						
Energy consumption per cycle CircoTherm (kWh)	0.61						
Energy consumption per cycle conventional (kWh)	0.73						
Oven capacity (L)	47	45	45	45	45	36	44
Time to cook standard load (mins)	46						
Largest baking sheet area							
(cm ²)	1290	1290	1290	1290	1290		

'Measured according the ENSU3U4, 65/2U14. 4 for further information on inverter technology, please go to www.neffhome.com/uk. 4 for Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more

MICROWAVE OVENS

Style and convenience built-in

Our built-in microwaves fit seamlessly into your cabinetry. Depending on your chosen model, you'll enjoy handy automatic programmes that suggest ideal cooking times, a full touch TFT display, or a Memory Function that allows you to select your favourite settings with just one touch of a button. Selected microwaves also feature a grill, so you can finish off your comforting lasagne with a layer of beautifully golden cheese.

INVERTER TECHNOLOGY

Inverter Technology delivers microwave power constantly while cooking – other traditional microwaves are only able to deliver maximum power and manage the differing settings by alternating between on and off for specific time periods. This can result in uneven heating or overcooked food and can be especially damaging to more delicate foods or smaller portions.

With Inverter Technology, the microwave delivers power constantly, gradually managing the power levels down over time in order to control the food temperature. This gentle approach to cooking reduces uneven heating or overheated food and is especially beneficial for delicate foods. It may be necessary to adjust cooking times to ensure foods are thoroughly cooked before serving.

NEFF recommends that the maximum power setting be used for heating liquids and the microwave is calibrated to provide a burst of high power initially, before managing the power down in stages to the next level over the first few minutes.



C17GR00N0B

Compact Microwave Oven with Grill and left hinged door







Touch key Shift Control

VERSATILE & Grill






A HELPING HAND IN THE KITCHEN

We never underestimate the convenience of a microwave. Designed to complement with our selected single ovens, it's easy to create a cooking station which perfectly meets your needs.

er models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the e power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost I be available once more.





WARMING DRAWERS

Integrated convenience

With our 29cm warming drawer holding up to 40 plates, a larger size warming drawer is ideal for cooks who regularly entertain family and friends. If a slimmer version is more in-keeping with your space, our 14cm drawers also offer an impressive 12 plate capacity. With the option to melt chocolate, prove bread and keep your meals warm before serving, our warming drawers assist from prep to table.



N17HH20N0B

Warming drawer, compatible with $N\,\,90$ and $N\,\,70$ models



Invaluable in any serious kitchen, our warming drawers help at every stage of the cooking process. Ideal for proving, melting, defrosting and keeping cooked meals and crockery warm, our warming drawers perfectly sit below our single and compact ovens.

Combine
N 90/N 70/N 50
drawers with
ovens and compacts
from the same
Collections.





COLLECTION	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N 50	N 50
YPE	29CM HIGH WARMING DRAWER	14CM HIGH WARMING DRAWER	14CM HIGH WARMING DRAWER	14CM HIGH ACCESSORY DRAWER	14CM HIGH VACUUM DRAWER	29CM HIGH WARMING DRAWER	14CM HIO WARMIN DRAWE
BLACK GLASS WITH STEEL TRIM	N17HH20N0B	N17HH10N0B	N17HH11N0B	N17ZH10N0	N17XH10N0	N1AHA02N0B	N1AHA011
UNCTIONS							
/acuum drawer					•		
Plate warming	•	•	•			•	•
Hold Warm	•	•	•			•	•
Defrost	•	•	•			•	•
ow temperature cooking	•	•	•				
Accessory drawer				•			
FEATURES							
Operating indicator light	•	•	•		•	•	•
Electronic control	•	•	•		•		
Rotary temperature control dial	•	•	•			•	•
Touch Control					•		
Number of temperature settings	4	4	4			3	3
Number of vacuum seal time settings					3		
Number of vacuum sealing levels - bags /					3/3		
Glass safety lid					•		
Maximum temperature °C	80	80	80			80	80
Minimum temperature °C	40	40	40			40	40
Ceramic Glass Base	•	•	•				
DESIGN				-			
nstall independently	•	•	N70 (N00	• N70 (N00	• N.70 (NO)	• N.50	
nstall with compact appliance	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N 50	N 50
nstall with a single oven	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N70 / N90	N 50	N 50
Push-Pull opening mechanism TECHNICAL INFORMATION		•		•	•		
Drawer interior volume L	52	20	20	21	8	58	23
nterior drawer dimensions HxWxD mm /acuum chamber dimensions	242x468x458	95x468x458	95x468x458	102x468x458	95x275x210	250x475x490	100x475x4
HxWxD mm							
nstallation in tall housing or under work surface	•	•	•	•	•	•	•
Maximum weight capacity kg	25	25	25	15	10	15	15
Total connected loading kW	0.81	0.81	0.81		0.32	0.40	0.40
Minimum fuse rating Amps	10	10	10		6	6	6
Cable length cm	150	150	150		150	150	150
GB plug	•	•	•		•	•	•
STANDARD ACCESSORIES							
/acuuming platform					•		
external vacuuming adaptor, hose & plugs					•		
Sample vacuuming bags					•		
Antislip mat				•		•	•
OPTIONAL ACCESSORIES							
100 x Vacuum bags (180 x 280 mm)					Z13CX62X0		



BUILT-IN DOUBLE OVENS WITH CIRCO THERM®

The versatility of two cavities

With the convenience of two oven cavities, our built-in double ovens provide any Cookaholic with plenty of cooking space without impacting on kitchen design. Featuring NEFF's CircoTherm® technology in the main oven and Pyrolytic Self Cleaning in both, it's possible to cook different dishes on multiple levels without any intermingling of flavours or mess to clean up.






AND COMPANY OF THE PARTY AND THE PARTY OF TH	
HOACMALINOD	
U2ACM7HN0B	
Built-in Double Oven	



N 50



Pyrolytic SelfCleaning

TOP OVEN KEY FEATURES

MAIN OVEN KEY FEATURES









COLLECTION	no sentuendo	N	50
BLACK GLASS WITH STEEL TRIM		17HH0B	
WHITE GLASS AND STEEL TRIM			
DESIGN DESIGN			
Neff Design Retractable controls		•	•
Electronic clock / timer		White I C	D display
ELECTRONIC CONTROL		Main	2nd
Temperature display		- Idiii	2110
Heating up indicator			
Residual heat indicator			
Temperature proposal			
SPECIAL FEATURES		Main	2nd
Door type		Drop Down	Drop Down
		Door	Door
Home Connect			•
Electronic control		1 v Cl = D=1	•
Telescopic Rails Standard Meat Probe		1 x Clip Rail	
		NA. 1	2 1
FEATURES Control of the Control of t		Main	2nd
Control panel lock		•	•
Full glass inner door		•	•
Safety switch off		1 x 25W	1 x 25W
Internal lighting		halogen	halogen
Number of shelf positions		4	3
Glazed door (Quadruple/Triple/Double)		Quadruple	Quadruple
COOKING FUNCTIONS		Main	2nd
CircoTherm®		3D	
CircoTherm® Gentle		•	
Top/bottom heat		•	•
CircoRoasting		•	
Full surface grill		•	•
Centre surface grill			•
Bread baking		•	
Bottom heat		•	•
Pizza Setting / CircoTherm Intensive		•	
Rapid heat		•	
OVEN CLEANING		Main	2nd
Pyrolytic Cleaning		•	•
Easy Clean®		•	
EcoClean liners (Roof/Back/Sides)			
Base clean			
Cleaning setting		•	•
STANDARD ACCESSORIES		Main	2nd
Wire shelves		1	3
Universal pan			1
ENERGY EFFICIENCY ¹		Main	2nd
Energy efficiency index		95.3	120.3
Energy efficiency class		А	В
Energy consumption per cycle CircoTherm	(kWh)	0.75	
Energy consumption per cycle conventional	(kWh)	1.00	0.83
Oven capacity	(L)	71	34
Time to cook standard load	(mins)	44	44
Larnest hakinn sheet area	(cm ²)	12	an





N :	50	N	50	N	50	N	50	N	50	N	50
U1ACI5			E5HN0B		2HN0B	'`			:4HN0B		2HN0B
		017165		017165	2111105	U1ACE:	 2HW0B	j./.cz		7,7,62	
•	•	•	•	•	•	•	•	•	•	•	•
White LCI	. ,		D display		D display		D display		D display		D display
Main via Meat probe	2nd	Main •	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd
Main Drop Down	2nd Drop Down	Main Drop Down	2nd Drop Down	Main Drop Down	2nd Drop Down	Main Drop Down	2nd Drop Down	Main Drop Down	2nd Drop Down		2nd Drop Do
Door	Door	Door	Door	Door	Door	Door	Door	Door	Door	Door	Door
1 x Clip Rail		1 x Clip Rail		1 x Clip Rail		1 x Clip Rail		1 x Clip Rail		1 x Clip Rail	
Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd
•	•	•	•	•	•	•	•	•	•	•	•
1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25W halogen	1 x 25' haloge
4 Triple	3 Triple	4 Double	3 Triple	4 Double	3 Double	4 Double	3 Double	3 Double	3 Triple	3 Double	3 Triple
Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd
3D	2110	3D	2110	3D	2.10	3D	2.110	3D	2110	3D	2.10
•		•		•		•		•		•	
•	•	•	•	•	•	•	•	•	•	•	•
•		•		•		•		•		•	
•	•	•	•	•	•	•	•	•	•	•	•
	•		•		•		•		•		•
•	•		•		•		•	•	•		•
•		•						•		•	
•		•		•		•		•		•	
Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd
		•		•		•		•		•	
roof/back/ sides	roof/back/ sides	roof/back/ sides	roof/back/ sides					back	roof/back/ sides		
• Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd	Main	2nd
3			3		3	3	3	2	2	2	2
Main 1			1 2nd] 2nd	Main			1 2nd		1 2nd
Main 95.3	2nd 120.3	Main 95.3	2nd 120.3	Main 95.3	2nd 120.3	Main 95.3	2nd 120.3	Main 94.7	2nd 120.3	Main 94.7	2nd 120.3
99.5 A	B	95.5 A	B	95.5 A	B	95.5 A	B	94.7 A	B	94.7 A	120 B
0.78	3	0.78	-	0.75	3	0.75	,	0.64		0.64	
	0.83	0.93	0.83	1.00	0.83	1.00	0.83	0.84	0.83	0.84	0.83
0.93											
0.93 71	34	71	34	71	34	71	34	47	34	47	34

A HOB FOR EVERY COOKING STYLE

THE HOB COLLECTIONS



Because every cook has their own unique style

Choosing the right hob to complement your kitchen and cooking style can be challenging. At NEFF we understand the importance of creating a premium, seamless kitchen with appliances that are designed to coordinate with one another. To help you select the perfect kitchen companion, we've categorised all our hobs into easy-to-follow Collections based on product features, control display and design.

N 90

STYLES OF HOBS

- Venting
- FlexInduction
- Gas on Glass

ELECTRIC

THIS COLLECTION CAN INCLUDE*:-

TwistPad® Fire Control

Premium glass on steel frame

Hob Hood Control

Extended FlexInduction

FlexInduction

Power Move

Power Transfer

THIS COLLECTION CAN INCLUDE*:-

FlameSelect®

Dual Wok Burner

LED power level display Residual heat indicator

Premium ceramic glass on stee

Cast iron pan supports

N 70

STYLES OF HOBS

- Venting
- Quick-Light
- Gas on Steel with black inlay

ELECTRIC

THIS COLLECTION CAN INCLUDE*:-

TwistPad® Control

Touch Control

Bevelled edge glass FlexInduction

Power Move

Power Transfer

GAS

THIS COLLECTION CAN INCLUDE*:-

FlameSelect®

LED power level display

Residual heat indicator

Tempered glass/steel with black

N 50

STYLES OF HOBS

- Venting
- CombiZone Induction
- Quick Light
- Gas on Steel

ELECTRIC

THIS COLLECTION CAN INCLUDE*:-

Touch Control

Bevelled edge glass

CombiZone induction

Ring Zones

GAS

THIS COLLECTION

CAN INCLUDE*:-Cast iron supports

Cast iron finish supports

N 30

STYLES OF HOBS

- Quick Light
- Gas on Steel

ELECTRIC

THIS COLLECTION CAN INCLUDE*:-

Control Dials

Frameless design

Induction technology

Ring Zones

GAS

THIS COLLECTION CAN INCLUDE*:-



A HOB FOR EVERY COOKING STYLE



Rethink cooking in NEFF's infinite kitchen

A great meal is all about the ingredients and cooking process. And it's the same when it comes to choosing the right hob. If you want flexibility, an electric FlexInduction hob might be what you're after. Or pick one of our innovative gas or fast induction hobs. Can't decide which one? Then the Domino range might be the best hob for you, as it mixes all of the above. There's a NEFF hob for anyone to get creative with.



VENTING HOBS

The 2-in-1 Hob and Hood is here. With freedom from a conventional wall or island hood, our integrated cooktop ventilation allows you to reclaim your space in the kitchen. The Neff Venting Hob is set to create the stylish and sociable kitchen you've always dreamt of

T58TL6EN2 N90 Venting Hob



CERAMIC HOBS

With their frameless design, our Ceramic hobs standout in any kitchen, and a whole range of options with up to 17 power settings makes preparing the next feast as easy as pie. Better still, our enhanced touch control panel provides full flexibility over your cooking.

T16FD56X0 N70 Ceramic Hob



FLEX INDUCTION HOBS

For sociable cooks who often find themselves juggling multiple pans, a FlexInduction hob provides any size pan, anywhere cooking within the zones When the zones are activated, pans will receive instant, even and rapid heat transference wherever they are placed. Most hobs within the FlexInduction range are controlled by our innovative and stylish TwistPad Fire® removable and illuminated magnetic dial.

T59TS61N0 N90 FlexInduction Hob with wistPad Fire®



DOMINO HOBS

Our domino hobs can be mixed and matched to create a cooking station that's all your own. With gas (30cm), Quick-Light ceramic (30cm), FlexInduction (30cm) and Teppan Yaki (40cm) hobs within the range, our Domino hobs can be linked to provide the ultimate versatile cooking experience.

N53TD40N0, N23TA29N0 Domino Hobs



INDUCTION HOBS

If sleek, stylish and clean lines are more in keeping with your kitchen design, our Induction hobs provide a minimalistic and premium look whilst providing a quick and responsive cooking surface. Cooking with an Induction Hob saves energy and is incredibly safe – there is little residual heat once the saucepan is removed from the hob.

T36FB40X0 N50 Induction Hob



GAS HOBS

For traditionalists who prefer to see exactly how much heat is delivered to their pans, gas cooking provides a robust and reliable way to prepare your favourite dishes. You can control your hob by numbers and not by eye with our precise and responsive FlameSelect® heat control feature, available across selected gas hobs.

T27TA69N0 N90 Gas Hob

FINISHES

Ceramic & Induction Hobs



Premium glass on stainless



Bevelled design trim



Frameless with front bevel



Flushline



Frameless

steel trim

Gas Hobs



Ceramic Glass on stainless steel trim



Black tempered glass



Stainless steel finish with panel insert



Steel



Black finish

White finish

We strive to maintain a range of hobs with sizes and finishes to suit all requirements. Choose from a number of options including colour trimmed models to match other NEFF appliances, or variations that blend in naturally with the worktop.

EFFICIENCY

Induction hobs are particularly energy efficient, using around 30% less energy than gas or ceramic hobs. The energy goes directly to the pans and the food inside them, so that almost no energy is lost. And because the heat needed is available much quicker, induction uses less energy than other fuel types.

SAFETY

People have used gas for decades as a quick, easy and safe means to cook. However, constantly changing international standards have brought safety into clearer focus, and as a result we've incorporated effective safety features into many of our gas hobs, like flame control, explained on page 52.

CLEANING

The easiest hobs to clean are ceramic and induction models. Their smooth flat surface is easy to wipe down, and because the temperature of the glass is much lower than other hob types, spillages do not burn on and can be quickly cleaned up.

60CM PLUG&PLAY HOB

T36FB41X0G and T36CA50X1U Plug&Play are frameless induction hobs that are designed to work off a standard 13amp plug. This gives the flexibility of installing an induction hob without the need for hard wiring. If your usage for an induction home is very light and you need a basic induction hob then this is an idea choice – as more zones on the appliance are engaged then the power to each diminishes – meaning it can deliver ample power and efficiency when one or the two zones are used – perfect in homes which may be single occupancy.

A HOB TO SUIT EVERY CHEF



INDUCTION COOKING

Heat adjustment at your fingertips

An induction hob provides one of the most efficient methods of cooking. Extremely fast, with the ability to accurately control the power, induction hobs contain a strong electromagnet positioned under the surface of the hob. When a zone is activated and a ferrous metal pan is placed on it, a circuit is created which begins a rapid, even transference of heat to the base of the pan and its contents.



AN INDUCTION HOB WILL BOIL A PAN OF WATER ALMOST TWICE AS FAST AS A GAS HOB

STYLISH

Ceramic induction hobs are sleek, shiny and smooth – they complement the minimal, uncluttered lines of today's stylish kitchens.

RESPONSIVE

Induction hobs are extremely controllable; as soon as a saucepan is removed it breaks the circuit and diffuses heat instantly.

Footured Model: T/ODD22V2 NEO 90cm Industion Heb

EASY TO USE

The flat, non-porous surface can be wiped over quickly, with areas around the circular zones remaining cool even during cooking. That way, if food spills or boils over it won't ever get burnt on to the surface.

ENERGY EFFICIENT

Induction hobs are extremely energy efficient with the added advantage of saving money on electricity bills. The precise amount of energy needed is only ever used as just the base of the pan heats up.

SAFE TO USE

A feature on all of our induction hobs, automatic pan recognition 'senses' and subsequently only heats up saucepans with a smooth, flat base, suitable diameter and ferrous metal content. This ensures that the hob will not heat up items like metal spoons accidentally left on induction zones, for added peace of mind.

lote: Only saucepans made of ferrous metal are



INDUCTION HOBS FEATURES & FUNCTIONS



Because every cook has their own unique cooking style

For entertainers, professional cooks or large families, induction cooktops provide a fantastic solution to demanding cooking requirements. The modern design, with clear print lines, supports a variety of pan sizes while reflecting a minimalistic design trend. Proud of its innovations in Induction Cooking, NEFF has a range of features and functions to suit every cooking style.

KEY FEATURES & FUNCTIONS

POWER BOOST – Optimised power level function for more flexible and even faster heating.



TOUCH CONTROL – Simply select a zone then swipe your finger across the control panel to select a heat



POWER MOVE – The combi zone offers two heating zones: boiling in front and warming in the rear.



COMBI INDUCTION – 2 individual induction cooking zones can be combined to 1 large zone with even heat distribution.



INDUCTION – The heat is generated directly in the cookware for precise cooking that stops when power



ADDITIONAL FEATURES & FUNCTIONS

CONTROL PANEL LOCK – A useful safety feature, just switch on the control panel lock to make sure children can't play with the controls.

QUICK START – Allows for a quick and immediate start to the cooking process as the hob detects the pan, which then activates the zone.

RESIDUAL HEAT INDICATORS – Primarily a safety feature – 'H' means it's hot enough to continue cooking; 'h' means it's not hot enough to cook, but too hot to touch.

RESTART – Provides full control over the hob by recalling the current used setting for up to four seconds if the hob has been unintentionally switched off by simply pressing the main switch.

CONTROL PANEL SUSPENSION – Activates a freeze setting at the touch of a button, allowing the hob to be wiped clean easily and safely.

SAFETY CUT-OUT FACILITY -

For added peace of mind, our induction hobs feature a safety cut-out facility which activates if the hob has been in constant use but no settings have been changed for a period of time.



VENTING HOBS



The 2-in-1 hob and hood

With freedom from a conventional wall or island hood, our Venting Hob allows you to reclaim your space in the kitchen. Offering a cooking surface with a powerful, built-in extraction mechanism, the NEFF Venting Hob is set to create the tasteful and modern kitchen that you've always dreamt of.



A KITCHEN TO BREATHE IN

Our Venting Hobs free you to place the hob wherever you want, whether it be on a kitchen island or in front of a window. With no hood in the way, there's nothing to block your view or creativity.

With a stylish cast-iron grate placed over the hood, the grate conveniently doubles as a pan rest too – even when it's on. Selected Venting Hob models offer the following:

- Space-saving
- Quiet
- Better extraction
- Hob Hood Control
- Suits any layout 60cm, 70cm,80cm
- Standard zone, Combizone or flexinduction

FLUSH EXTRACTION

FRYING SENSOR

This function can be used to fry food while maintaining the suitable frying pan temperature.





INSTALLATION FELXIBILITY

Featured model: T58TL6EN2 N90 Venting Hob



POWER MOVE


Divide the hob into three heat zones, each with a different power level so you can easily move a pot between intense heat at the front, simmering in the middle and a low, keep-warm temperature at the back.



+) POWER TRANSFER

Move pots anywhere in the double FlexZone and the setting will automatically move with them.

All it takes is a single touch of a button.



KEY FEATURES & FUNCTIONS



TWISTPAD® FIRE – With the removable and illuminated TwistPad®Fire dial you can react to pans bubbling away quickly and easily. Simply point and twist towards your cooking zones to activate and adjust heat.



TOUCH CONTROL – Simply select a zone then swipe your finger across the control panel to select a heat mode.



COMBIZONE - Individual yet flexible cooking areas can be used independently or linked together to create an expanded cooking zone that is optimised for flex induction.

4 TYPES OF INSTALLATION

The different types of installation can be seen on page 56 and full list of installation accessories can be seen on page 13 of the Appliance Line Drawings.

ADDITIONAL FEATURES & FUNCTIONS

AUTOMATIC AIR SENSOR – Automatically adjusts the extraction rate to match the situation in the kitchen.

HIGH EXTRACTION RATE – Ensures a clear view while cooking thanks to efficient motor technology.

REDUCED NOISE – Our optimised motor guarantees a quiet cooking experience.

SPACE-SAVING INSTALLATION – Room for pull-out drawers thanks to the installation of the extractor duct in a lower cabinet.

POWER BOOST – Optimised power level function for more flexible and even faster heating

more flexible and even faster heating.

FLEX INDUCTION HOBS



Innovations in flexible cooking

With the majority of Flex Induction hobs featuring TwistPad® operation, simply point and twist the removable dial towards your cooking zones to activate, or upgrade to the TwistPad® Fire and control both the hob and hood settings on your integrated appliance. Once you've finished cooking, the magnetic dial can simply be removed for a sleek, premium cook top finish. If you're looking for the ultimate feature navigation, choose a FlexInduction hob with our innovative large high-resolution colour TFT display. Available on selected models, our most premium control display guides you easily through the menu, and its high contrast screen makes for a stunning worktop design.



FLEX INDUCTION IS PERFECT FOR ANY SIZE PAN, ANYWHERE COOKING

STYLISH HOB CONTROL



FLEXINDUCTION - A NEW GENERATION OF INDUCTION COOKING

FlexInduction hobs provide greater flexibility by heating pans of any size, positioned anywhere in the zone.

Offering greater flexibility by using an enlarged single zone that heats pans of any size that are positioned anywhere within it, giving maximum flexibility for all users and better control over cooking requirements.

FlexInduction hobs have one or two elongated induction zones, which create a total cooking area each of 380mm x 200mm, providing consistent heat across the whole of this

Beneath the glass of each of these zones there are four unique induction coils, which work independently or together, dependent on whether a pan is detected on the surface. This means that energy efficiency is maximised and pans of any size can be placed anywhere in the zone.

TwistPad® fire

Featuring a unique, illuminated and removable dial, our TwistPad® Fire control feature has been designed to react to pans bubbling away quickly and easily. Simply point and twist the clever magnetic dial towards your cooking zones to activate and adjust the heat accordingly.

Available with selected FlexInduction hobs, TwistPadFire® makes controlling your hob easier, and more stylish, than ever before.

Available on selected FlexInduction and Venting Hobs.

DOMINO HOBS

Bespoke solutions for creative cooks

Our Domino hobs can be mixed and matched to create a cooking station that's all your own. With gas (30cm), Quick-Light ceramic (30cm), FlexInduction (30cm and 80cm) and Teppan Yaki (40cm) hobs within the range, our Domino hobs can be linked to provide the ultimate cooking experience. If you know exactly how you like to cook but prefer an additional zone for those speciality dishes, it's also possible to mix a full sized hob with an extra Domino zone.

HOW DO YOU LIKE TO COOK? WITH NEFF DOMINO HOBS, THE OPPORTUNITIES ARE ENDLESS..

DOMINO DOUBLE

DOMINO HOB

Combination shows a FlexInduction Domino

Hob with a Domino Gas Hob.

DOMINO TRIPLE

DOMINO HOB

TEPPAN YAKI

GAS DOMINO HOB



Example combination. Triple

Combination shows a FlexInduction Domino Hob, Teppan Yaki and a Domino Gas Hob.

FLEXINDUCTION

FLEX INDUCTION HOB





Example combination, Hob Combination shows a 80cm FlexInduction Hob with Teppan Yaki.

USING A GAS HOB



The original re-imagined

Cooking with gas is a tried and tested medium. Its reliability, responsiveness and versatility have earned it the loyalty of both amateur and professional cooks alike. Our new range of gas hobs now feature FlameSelect®, innovative technology that gives you more control options to select precise heat to suit whatever your are cooking.

BECAUSE IT'S SO RESPONSIVE AND CONTROLLABLE, GAS IS STILL THE NUMBER ONE CHOICE FOR MANY NEFF CUSTOMERS.

THE NEFF GAS HOB RANGE

With gas, each pan requires its own burner to receive heat, so consideration needs to be taken over the average usage that the hob will receive and how many burners are going to be used. We provide three widths of gas hob, with a range of four and five gas burners. Some come with a larger wok burner as standard, but many models have a wok support available as an accessory.



T29DA69N0 90cm 5 burner extra-wide hob



T27DA69N0 75cm 5 burner wide hob



T26DA59N0 60cm 4 burner hob



FLAME SELECT®



Gas cooking has never been more precise

With FlameSelect[®], the gas flame adapts to the dish and not the other way around. Whether you're searing a steak, boiling pasta, or simmering a roast, you can set the heat just as you would with an electric hob. Select one of the 9 heat levels available and you can see how the flame becomes larger or smaller just as you need it. For the first time ever, cooking with gas is as easy as cooking on an electric hob.



CONTROL YOUR HOB BY NUMBERS, NOT BY EYE





HOW DOES IT WORK?

With innovative and patented valve technology, our FlameSelect® gas hobs can regulate the gas output precisely in levels from 1 to 9. The power levels can then be set in proportional steps exactly like the power setting of an electric hob. Additionally, the control dials are accentuated with printed numbers in order to clearly highlight the chosen power levels.



THE FIRST GAS HOB TO ADAPT ITSELF TO ANY DISH



BENEFITS OF A CERAMIC GLASS GAS HOB

Ceramic glass gas hobs feature a range of additional benefits over tempered glass hobs. In terms of safety, they have extra heat resistance and are ultra durable. They feature low-profile, one-piece burners which clean easily and always look trim and streamlined. The glass used is also exceptionally strong which keeps the thickness down to just 4mm. Finished with high precision, bevelled edges and mounted on a steel frame, they come complete with pan supports.

GAS HOBS FEATURES & FUNCTIONS

A true favourite amongst passionate cooks

Searing, boiling and flambéing on flames resonates with the primal cook in all of us. NEFF gas hobs combine the style and reliability that cooks expect from this powerful method of cooking. Proud of its innovations in Gas Cooking, NEFF has a range of features and functions to suit every cooking style.



KEY FEATURES & FUNCTIONS



FLAMESELECT® – Cook everything just right with 9-level FlameSelect®. With FlameSelect® the gas flame adapts to your cooking, offering precise control every time. For the first time ever, cooking with gas is as easy as cooking on an electric hob.

POWER LEVEL DISPLAY – Some gas hobs benefit from a host of features that are usually found on ceramic hobs, including an LED display. The residual heat indicator displays if there is any residual heat on the hob. In the event of a problem with the individual burner the indicator lights also act as warning lights.

HIGH SPEED BURNERS – Provide a surge of extra power; particularly useful for boiling a large pan of water quickly.

WOK BURNER – The secret of Chinese stir fry cooking is heat and speed. Our Domino wok (N23TA29N0) delivers 6.0kW.

FLAME CONTROL – The flame failure safety device shuts down the supply of gas to the hob if the flame goes out for any reason. The automatic reignition uses a heat sensor to detect if the flame goes out and, if so, will automatically attempt to reignite.

CAST IRON PAN SUPPORTS – Firmly hold the pan above the flame, leaving space between the base and the burner. They're used on the majority of our models because of their robust and sturdy nature and tolerance to prolonged contact with heat.

EASY GRIP CONTROLS – Ergonomically designed to be gripped and turned easily, even with wet or greasy hands.

SIMMER SETTING – Excellent for slow simmering, almost all of our gas hobs have a very low burner with a maximum of just 1.0kWh.

HOB ACCESSORIES



We've carefully designed a range of cooking accessories to allow you to get the most out of your hob. From robust saucepans to creative cooking solutions for our FlexInduction hobs, there's lots of ways to try something new with NEFF. To ensure compatibility please check the specific model.

ALL THE TOOLS FOR ANY EAGER COOKAHOLIC



Z9416X2 (accessory number) 00576158 (part number)



Z9417X2 (accessory number) 00575951 (part number)

FLEX INDUCTION ACCESSORIES

Spanning the length of your FlexInduction zone, our accessories are designed to inspire you in the kitchen. From everyday cooking to theatrical displays, there's an accessory to bring out the best in your favourite dishes.

GRIDDLE PLATE

Ideal for cooking steaks, fish, flatbreads and sliced vegetables, an induction griddle plate offers considerably more flexibility than a standard square griddle pan. All accessories within our induction range are easy to clean and dishwasher safe.

Surface area: 41.5 x 26.5cm

TEPPAN YAKI

Inspired by Japanese cooking, our Teppan Yaki plates are a stylish way to cook meat, fish and vegetables. Ideal for sociable cooking, Teppan Yaki plates provide even heat transference for delicious, impressive dishes.

Surface area: 41.5 x 26.5cm

SAUCEPANS

Ferrous metal saucepans are required for use on an induction hob. To check if a saucepan can be used with an induction hob use our quick magnetic test shown below.

NEFF saucepans have been tried and tested to ensure that they offer optimum performance with NEFF hobs.



Magaztic has

In most cases if the magnet sticks, the pans are made from ferrous metal and are therefore likely to be suitable for use on induction hobs.



OVAL ROASTER AND STEAMER RACK

With our roaster and steam accessory, it's possible to steam on a NEFF induction hob too. Ideal for preparing delicate fish and vegetables, steam cooking is a great way to prepare healthy, nutritious dishes. Oven and dishwasher safe.



Z9410X1 (roaster accessory number) 00573879 (roaster part number)



Z9415X1 (steam rack accessory number) 00576118 (steam rack part number)

52 neff-home.com/uk/


The 2-in-1 hob and hood is here

Discover our new range of Venting Hobs, designed with flexibility in mind. With more options to use and install, packed with features, and phenomenally quiet too, you just need to focus on creating.

T58TL6EN2

Flex Induction Venting Hob

Integrated hood Flex Induction zone



DESIGN PERFORMANCE














T48TD7BN2

Flex Induction Venting Hob (702mm model also available **T47TD7BN2**)

Integrated hood



DESIGN PERFORMANCE

neff-home.com/uk/
















T48CB1AX2
Flex Induction Venting Hob

N 50

Integrated hood



DESIGN PERFORMANCE



N 70









T46CB4AX2

Flex Induction Venting Hob

N 50

Integrated hood



DESIGN PERFORMANCE














HOBITE			VENTING HOBS		
COLLECTION	N 90	N 70	N 70	N50	N50
MODEL NO.	T58TL6EN2	T48TD7BN2	T47TD7BN2	T48CB1AX2	T46CB4AX2
DESIGN					
Width mm	826mm	826mm	708mm	802mm	592mm
Control position/type	TwistPad®Fire	Touch Control	Touch Control	Touch Control	Touch Control
Style	Premium Glass on Steel	Premium Glass on Steel	Premium Glass on Steel	Frameless	Frameless
KEY FEATURES					
Home Connect	•				
Integrated extractor	•	•	•	•	•
Automatic extraction	Fully sensor based	Auto-On	Auto-On	Auto-On	Auto-On
Power Move	3 stages	2 stages	2 stages		
Power Transfer automatic setting transfer	•				
Frying Sensor	5 settings	4 settings	4 settings		
Power Boost	•	•	•	•	•
Flex Induction	•				
Number of Flex Induction zones	2				
Combi Zone Induction		2: Left & Right	2: Left & Right		
HOB FEATURES					
Number of individual zones	4	4	4	4	4
Power Levels	17	17	17	17	17
Digital display	•	•	•	•	•
Count up Timer	•				
Main on/off switch / QuickStart / Restart Function	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•
Energy Consumption Display	•	•	•		
Pan Recognition	•	•	•	•	•
Demo Mode	•				
Keep Warm Function	•	•	•		
SAFETY FEATURES					
Residual Heat Indicator / Wipe Protection Function	•/•	•/•	•/•	•/•	•/•
Timer with automatic switch off for each zone	•	•	•	•	•
Control Panel Lock / Safety Time Switch off	• / •	• / •	• / •	• / •	•/•

Control Panel Lock / Safety Time Switch off HOOD FEATURES Climate Control sensor 17 + 2 Intensive 17 + 1 Intensive 9 + 2 Intensive 3 + 1 Intensive 3 + 1 Intensive 6 minutes 6 minutes 6 minutes 6 minutes 6 minutes Automatic intensive revert setting 12 / 30 minutes 30 minutes 12/30 minutes 12 / 30 minutes 12 / 30 minutes Dishwasher safe grease filter cassette with spillage collection Yes - 200ml capacity Yes - 200ml capacity Yes - 200ml capacity Yes - 200ml capacity 700ml capacity 700ml capacity Dishwasher safe spillage overflow collector 700ml capacity 700ml capacity 700ml capacity Electronic grease filter / cleanAir filter

Saturation indicators											
PERFORMANCE / TECHNICAL INFORMATION -	HOB										
Nominal voltage / Maximum power output	V/W	220-24	0 / 7,400	220-24	0 / 7,400	220-24	0 / 7,400	220-24	0 / 7,400	220-	240 / 7,400
Electrical cable length	cm	1	10	1	10	1	110	1	10		110
Rear left flex Induction zone	kW/mm	2.20	200x240	2.20	190x210	2.20	190x210	1.80	180	1.40	150
Rear right flex Induction zone	kW/mm	2.20	200x240	2.20	190x210	2.20	190x210	1.80	180	1.40	150
Front left flex Induction zone	kW/mm	2.20	200x240	2.20	190x210	2.20	190x210	2.20	210	2.20	210
Front right flex Induction zone	kW/mm	2.20	200x240	2.20	190x210	2.20	190x210	2.20	210	2.20	210
flex Induction zone left	kW/mm	3.30	400x240	3.60	380x210	3.60	380x210				
flex Induction zone right	kW/mm	3.30	400x240	3.60	380x210	3.60	380x210				
Rear left / right zone – with Power Boost	max. kW	3.70	/3.70	3.70	/3.70	3.70	/3.70	3.10	/3.10	2.	20 / 2.20
Front left / right zone – with Power Boost	max. kW	3.70	/3.70	3.70	/3.70	3.70	/3.70	3.70	/3.70	3.	70 / 3.70
PERFORMANCE / TECHNICAL INFORMATION -	- EXTRACTOR										

Extractor energy efficiency rating	A B	A B	₫ B	å B	â B
Extraction Rate in m ³ /h ^{1,2}					
Ducted / Recirculating power level Minimum	154 / 150	161 / 154	154 / 150	332 / 327	332 / 327
Ducted / Recirculating power level Maximum	500 / 500	500 / 500	500 / 500	500 / 500	500 / 500
Ducted / Recirculating power level Intensive	622 / 615	622 / 615	622/615	575 / 565	575 / 565
Noise level (sound power) based on dB(A) re 1 pW ^{1,3}					
Ducted / Recirculating power level Minimum	42 / 41	42 / 41	42 / 41	60/58	60 / 58
Ducted / Recirculating power level Maximum	69 / 68	69 / 68	69 / 68	68 / 68	68 / 68
Ducted / Recirculating power level Intensive	74 / 72	74 / 72	74 / 72	72 / 70	72 / 70

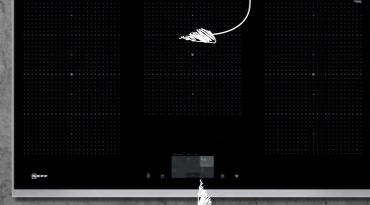

DESIGN PERFORMANCE

With (m)

TFT DISPLAY

For Industrian Exercise

TFT DISPLAY

TFT DISPLAY

TOTAL DISPLAY

TO

T68TF6RN0 Flex Induction Hob

N 90

Home Co Hob-Hoo 5" Full To

Power M Automat Frying Se Power Bo

Number

Number

Digital di: Count up QuickSta Restart F

Energy C Main on/ Quick-Off Pan Reco

Keep Wa

Residual Timer wi Control I Safety Ti Wipe Pro

PERFORM


Nomina Maximu

Electrica GB plug

Rear left Rear righ Rear cer Front ce

Front left Flex Induction zone

2 Flex Induction zones

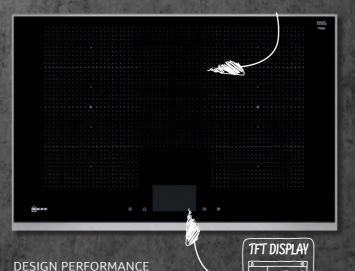

						爨
				1000		8
			800000000000000000000000000000000000000		NOW N	题
	66		. 8	1		2
	68		- 1			
			E.,			器
则是否的是25%。	600	Yes		350	100	
YPE		FLE	EX INDU	CTION I	НОВ	
ECTION		N	90	N	90	55
EL NO.	T	59TI	F6RN0	T68TI	6RN0	
mn			Bmm		mm 	
position / type			FT Control			驑
	P		m glass steel		m glass steel	
TURES						
onnect			•		•	
od Control			•		•	
ouch colour display with Dish Categories			•		•	
1ove		3-s	teps	3-s	teps	
tic setting transfer			•	•	•	
ensor		5 set	ttings	5 set	tings	
loost			•	•	•	
ost			•	•	•	
of Flex Induction zones			3		2	
d Flex Induction Zone of Combi Induction zones					2	
ES						
of individual zones			5		4	
evels			7		7	疆
isplay			•		•	巖
o Timer			•		•	
art			•		•	器
Function			•	•	•	
Consumption Display		,	•	•	•	
off switch			•	•	•	麗
ff Function						
ognition			•	•	•	鹽
lode			•	•	•	1
arm Function			•	•		
Heat Indicator						
ith automatic switch off for each zone						
Panel Lock			•			
ime Switch off			•		•	
otection Function			•		•	
MANCE / TECHNICAL INFORMATION						
l voltage	V	220	-240	220	-240	
m power output V	V	11,	100	7,4	+00	
al cable length cn	n	1	10	1	10	
t Flex Induction zone kW/mn		.20	200×240	2.20	200x230	
t zone kW/mn		20	200.242	2.22	200 222	
ht Flex Induction zone kW/mn		.20	200x240	2.20	200x230	
ht zone kW/mn htre zone kW/mn		.60	300×240			
ntre zone kw/mn entre zone kW/mn		.00	300XZ4U			
2 23.1C						

VENTING HOBS OPTIONAL EXTRAS



HOB TYPE			VENTING HOBS		
COLLECTION	N 90	N 70	N 70	N50	N50
MODEL NO.	T58TL6EN2	T48TD7BN2	T47TD7BN2	T48CB1AX2	T46CB4AX2
OPTIONAL ACCESSORIES					
Set of three pans	Z943SE0	Z943SE0	Z943SE0	Z943SE0	Z943SE0
Rectagular roasting pan with lid (approx. 320x200mm)	Z9410X1	Z9410X1	Z9410X1		
Steamer pan insert of use with Z9410X1 roasting pan	Z9415X1	Z9415X1	Z9415X1		
Teppan Yaki (approx. 400x200mm)	Z9418X0	Z9418X0	Z9418X0		
Griddle plate (approx. 400x200mm)	Z9416X2	Z9416X2	Z9416X2		
Ducted operation using accessory kit	Z811DU0	Z811DU0	Z811DU0	Z811DU0	Z811DU0
Recirculating operation: cleanAir 'Unducted' Kit accessory	Z821UD0	Z821UD0	Z821UD0	Z821UD0	Z821UD0
Recirculating operation: cleanAir 'Partly Ducted' Kit accessory	Z821PD0	Z821PD0	Z821PD0	Z821PD0	Z821PD0
	SECTION AND PROPERTY OF THE PERSON OF THE PE	San	CONTRACTOR STATEMENT	STREET, STREET	ACTION OF THE PARTY OF THE PART

VENTING HOB INSTALLATION OPTIONS

For the full range of installation accessories see page 13 of the Appliance Line Drawings.

UNDUCTED RECIRCULATION	CUSTOMISED PARTLY DUCTED RECIRCULATION
CUSTOMISED FULLY DUCTED RECIRCULATION	DUCTED EXHAUST TRACTION

Is comply with COMMISSION REGULATION (EC) No 1275/2 power output (20A); Current management options for 16A

neff-home.com/uk/

3.30 400×240 3.30 400×230

3.30 300x300



Point, twist and remove for cleaning -TwistPad® offers the ultimate control

Our Flex Induction hobs are created to respond to your way of cooking. Delivering heat exactly where it's needed, Flex Induction is a truly liberating way to prepare your favourite dishes. With a range of griddle pans and Teppan Yaki grill plates available from the NEFF online store, creative cooking has never been easier. With the majority of Flex Induction hobs featuring TwistPad® operation, simply point and twist towards your cooking zones to activate, or upgrade to the TwistPad®Fire and control both the hob and hood settings on your integrated appliance. Once you've finished cooking, the magnetic TwistPad® dial can simply be removed for a sleek, stylish cook top finish.

T59TS61N0

Flex Induction Hob (918mm width)

3 Flex Induction zone



THE JOY OF FLEXIBLE COOKING

SIGN PERFORMANCE

TOURISH PRINCE

TOURISH PERFORMANCE

TOURISH PRINCE

TOURISH PRINCE

TOURISH PRINCE

TOURISH PERFORMANCE

TOURISH PRINCE

TOURI

DESIGN PERFORMANCE













Wipe Protection Function	
PERFORMANCE / TECHNICAL INFORMATION	
Nominal voltage	V
Maximum power output	W
Electrical cable length	cm
GB plug	
Rear left FlexInduction zone power	kW/mm
Rear left zone power	kW/mm
Rear right FlexInduction zone power	kW/mm
Rear right zone power	kW/mm
Rear Centre zone power	kW/mm
Front Centre zone power	kW/mm
Front left FlexInduction zone power	kW/mm
Front left zone power	kW/mm
Front right FlexInduction zone power	kW/mm
Front right zone power	kW/mm
FlexInduction Zone left power	kW/mm
FlexInduction Zone right power	kW/mm
Extended FlexInduction rear left power	kW/mm
Extended FlexInduction rear right power	kW/mm
CombiZone left power	kW/mm
CombiZone right power	kW/mm
Rear left zone with powerBoost	(max. kW)
Rear right zone with powerBoost	(max. kW)
Rear Centre zone with powerBoost	(max. kW)
Front Centre zone with powerBoost	(max. kW)
Front left zone with powerBoost	(max. kW)
Front right zone with powerBoost	(max. kW)
	The second second







NSO						DUCTION				
918mm	N	90	N	90			N	90	١	190
Front Front TrobugatFrie Tro										
Front Front TrobugatFrie Tro										
Transposed First Premium Glass on Sees Premium G										
Pennium Glass on Steel										
3-steps 3-steps 3-steps 3-steps 3-steps 3-steps 3-steps 5-settings										
3-steps 3-steps 3-steps 3-steps 5-settings 5	Premium Gi	ass on steel	Premium G	iass on steel	Premium G	ilass on steel	Premium G	ilass on steel	FIOI	it bever
3-steps 3-steps 3-steps 5-settings 5-setting				•		•		•		
Saettings				•		•		•		
Saettings										
Seatings	3-st	eps	3-5	teps					3-:	steps
\$\begin{array}{c c c c c c c c c c c c c c c c c c c	5 set	tinas	5 se	ttings					5 56	ettinas
3 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1									330	
2 1 1 5 5 5 4 4 4 4 4 17 177 177 177 177 177 177 177 177 177	•	•		•		•		•		•
5 5 5 4 4 4 4 17 17 17 17 17 17 17 17 17 17 17 17 17	3	3		2		2		2		2
17						2		1		
17										
17				5		4		4		4
220-240										
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7				•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7				•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7				•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7										•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7						_		_		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7				•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7		•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	•	•		•		•		•		•
11,100 11,100 11,100 7,400 7,400 7,400 7,400 110 110 110 110 110 110 110 2,20 200x240 2,20 200x230 2,20 190x230 2,20 200x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,30 400x240 3,30 400x230 3,30 380x230 3,30 400x210 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,70 3,7	220	2/0	220	2/0	22/	2/0	22/	2/0	224	2/0
110 110 110 110 110 110 110 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.60 300x240 3.30 300x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70<										
2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.60 300x240 3.30 300x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.60 300x240 3.30 300x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 3.30 300x300 3.30 300x300 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
2.60 300x240 3.30 300x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 3.30 300x300 3.30 300x300 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70	2.20	200×240	2.20	200×240	2.20	200×230	2.20	190×230	2.20	200×210
2.60 300x240 3.30 300x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 3.30 300x300 3.30 300x300 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.70 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70	2.20	200×240	2.20	200×240	2.20	200×230	2.20	190×230	2.20	200×210
2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.70 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70	2 60	300×240	3 30	300x240						
2.20 200x240 2.20 200x240 2.20 200x230 2.20 190x230 2.20 200x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 3.30 300x300 3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70	2.00	300X2 10	3.30	300%2.10						
3.30	2.20	200×240	2.20	200×240	2.20	200×230	2.20	190×230	2.20	200×210
3.30										
3.30 400x240 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 300x300 3.30 300x300 3.30 300x300 3.30 300x300 3.30 300x300 3.30 3.70 3.70 3.70 3.70 3.70 3.70 3	2.20	200×240	2.20	200×240	2.20	200×230	2.20	190×230	2.20	200×210
3.30 400x240 3.30 400x240 3.30 400x230 3.30 380x230 3.30 400x210 3.30 300x300 3.30 300x300 3.30 300x300 3.30 300x300 3.30 300x300 3.30 3.70 3.70 3.70 3.70 3.70 3.70 3	2 20	400240	2.20	400-240	2.20	400220	2.20	200220	2.20	400210
3.30 300×300 3.30 300×300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
3.30 300x300 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70										
3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.70		70		70		70		70		70
3.70 3.70 3.70 3.70 3.70 3.70										
3.70 3.70 3.70 3.70					3	.70	3	.70		5.70
3.70 3.70 3.70 3.70 3.70	3.	70	3	.70	3	.70	3	.70	3	3.70
	3.	70	3	.70	3	.70	3	.70	3	3.70



Heat adjustment at your fingertips

Are you fond of exploring new and untried recipes and tastes? Our range of induction hobs lets you indulge each and every second of the cooking experience. Our FlexInduction hobs allow you to move your cookware freely around on the hob. The pots are automatically detected and heat applied where it's needed. But there's more to our hobs to guide you to a tasty result. Take the TwistPad®Fire which puts heat at your fingertips. A simple rotating motion with your index finger allows you to set the

T59FT50X0 Flex Induction Hob (918mm width)

N 70

		英国基础的	在2000年1月1日 - 1000年1月1日 - 1000年1日 -
			The second secon
		8 6	
Serr	019 88		2 19-
M-2			
			_





60 neff-home.com/uk/



T58FT20X0 Flex Induction Hob (826mm width)

			200
		5 +	
		72/86-2	0 H 0
Garr			O HI D
			CONTRACTOR OF THE PARTY OF THE
PP。2000年1月2日 2010日	图 编 现代的现在分词		SANCE CARRIED TO A CONTROL OF THE PARTY OF T
CICAL DEDE	ORMANCE		ALTERNATION OF THE PARTY OF THE
M M M M	URMANCE	The second second	DESCRIPTION OF THE OWNER, WHEN PERSONS AND PARTY
	OTT. IF TITEL	ALL STREET	COLUMN THE PROPERTY OF THE PARTY OF THE PART
田本区 ボーマーン (の) (日本)	of the last of the	AND DESCRIPTION OF THE PARTY OF	. (6)
	Induction No. of	THE RESIDENCE AND LABOUR.	70
(cm) TwistPad® Flex			
(cm) TwistPad® Flex	Induction Zones	公共工作的经济 (2000年)	istPad®

8	HOB TYPE	
9	COLLECTION	
8	MODEL NO.	
a	DESIGN	
8	Width	п
B	Control position	
0	Control type	
8	Style	

Home Connect

5" Full Touch colour display with Dish Categories Power Move

Automatic setting transfer

Frying Sensor

Power Boost

Pan Boost

Number of Flex Induction zones

Extended Flex Induction Zone

Number of Combi Induction zones

FEATURES

Number of individual zones

Power levels Digital display

Count up Timer QuickStart

Restart Function

Energy Consumption Display

Main on/off switch Quick-Off Function

Pan Recognition

Demo Mode

Keep Warm Function

PERFORMANCE / TECHNICAL INFORMATION	١
Nominal voltage	V
Maximum power output	W
Electrical cable length	cm
GB plug	
Rear left FlexInduction zone - power	kW/mm
Rear left zone - power	kW/mm
Rear right FlexInduction zone - power	kW/mm
Rear right zone - power	kW/mm
Rear Centre zone - power	kW/mm
Front Centre zone - power	kW/mm
Front left FlexInduction zone - power	kW/mm
Front left zone - power	kW/mm
Front right FlexInduction zone - power	kW/mm
Front right zone - power	kW/mm
FlexInduction Zone left - power	kW/mm
FlexInduction Zone right - power	kW/mm
Extended FlexInduction rear left - power	kW/mm
Extended FlexInduction rear right - power	kW/mm
CombiZone left - power	kW/mm
CombiZone right - power	kW/mm
Rear left zone - with powerBoost	(max. kW)
Rear right zone - with powerBoost	(max. kW)
Rear Centre zone - with powerBoost	(max. kW)
Front Centre zone - with powerBoost	(max. kW)
Front left zone - with powerBoost	(max. kW)
Front right zone - with powerBoost	(max. kW)




	·		•		•		ite:		100
ORDER GRANT STREET		- Charles - Char		THE RESERVE AND PERSONS ASSESSED.	IDUCTION	Name and Address of the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner, whic	A STATE OF THE PARTY OF THE PAR	ACCIO.	and the same of th
١	١ 70	1	N 70		170	1	١70		N 70
	FT50X0		FT20X0		FT60X0		D20X0		D50X0
91	8mm	80)2mm	59	92mm	80)2mm	59	92mm
F	ront	F	ront	F	ront	F	ront	F	ront
	stpad®		stpad®		stpad®		n Control		n Control
Fror	nt Bevel	Froi	nt Bevel	Fror	nt Bevel	Fror	nt Bevel	Fror	nt Bevel
3-	steps	3-	steps	3-	steps				
	•		•		•		•		•
	• 2		•		• 2		1		1
	5		5		4		5		4
	17		17		17		17		17
	•		•		•		•		•
	•		•		•		•		•
	•		•		•		•		•
	•		•		•		•		•
	•		•		•		•		•
	•		•		•		•		•
22	0-240	22	0-240	22	0-240	22	0-240	22	0-240
	1,100		,400		,400		,400		,400
	110		110		110		110		110
2.20	200x230			2.20	190x240			2.20	200x240
2.20	200×230	1.40 2.20	145 200×210	2.20	190×240	1.40 2.20	145 200×210		
								1.40	145
3.30	200×230	2.20	240			2.20	240		
2.20	200x230			2.20	190×240			2.20	200x240
2.20	200 220	1.80	180	2.20	100 2/0	1.80	180		
2.20	200x230	2.20	200×210	2.20	190x240	2.20	200×210	2.20	210
3.30	400x230			3.30	380x240			3.30	400×240
3.30	400×230	3.30	400x210	3.30	380x240	3.30	400×210		
	70		2.20		270		20		2.70
	3.70 3.70		2.20 3.70		3.70 3.70		2.20		3.70 2.20
	3.70		3.70				3.70		
:	3.70		3.10	:	3.70		3.10	:	3.70

Sleek, stylish & responsive - the perfect addition to a contemporary kitchen

Our induction hobs deliver heat exactly where you need it with little residual heat. This makes induction cooking one of the safest and most efficient modes of cooking around. Offering an extra-wide cooking surface and Full Touch Control operation, this hob is created with passionate, experimental cooks in mind.

T48PD23X2 Induction Hob (792mm width)

N 70

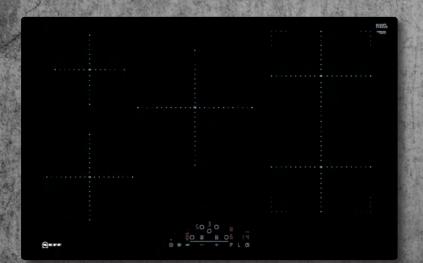



HOB TYPE
COLLECTION
MODEL NO.
DESIGN
Width mr
Control position
Control type

Control type
Style
KEY FEATURES
HomeConnect
Hob-Hood Control
5° Full Touch colour display
Power Move

Power Move
Automatic setting transfer
Frying Sensor
Power Boost

Pan Boost
Number of flexInduction zones
Extended flexInduction Zone
Number of combiZones

FEATURES

Number of individual zones

Power levels

Digital display

Count up Timer

QuickStart

Restart Function
Energy Consumption Display
Main on/off switch
Quick-Off Function

Pan Recognition
Demo Mode

Demo Mode Keep Warm Function

PERFORMANCE / TECHNICAL INFORMATION

Nominal voltage	V
Maximum power output	W
Electrical cable length	cm
GB plug	
Rear left FlexInduction zone - power	kW/mm
Rear left zone - power	kW/mm
Rear right FlexInduction zone - power	kW/mm
Rear right zone - power	kW/mm
Rear Centre zone - power	kW/mm
Front Centre zone - power	kW/mm
Front left FlexInduction zone - power	kW/mm
Front left zone - power	kW/mm
Front right FlexInduction zone - power	kW/mm
Front right zone - power	kW/mm
FlexInduction Zone left - power	kW/mm
FlexInduction Zone right - power	kW/mm
Extended FlexInduction rear left - power	kW/mm
Extended FlexInduction rear right - power	kW/mm
CombiZone left - power	kW/mm
CombiZone right - power	kW/mm
Rear left zone - with powerBoost	(max. kW)
Rear right zone - with powerBoost	(max. kW)
Rear Centre zone - with powerBoost	(max. kW)
Front Centre zone - with powerBoost	(max. kW)
Front left zone - with powerBoost	(max. kW)

FOR EVERY FORM OF PASSION












<u> </u>	170	١	170		INDUC 170		170	N	 50	5	0
	D23X2		D53X2		D23X2		D53X2	T36FE		T36FB	
	_										
	3mm ront		2mm ront		12mm ront		2mm ront	592 Fro		592i	
	Control		Control		n Control		Control	Touch (Touch (
	shline		shline		nt Bevel		it Bevel	Front		Frame	
2-:	steps	2-9	steps	2-:	steps	2-9	steps				
	•		•		•		•	•	•	•)
	1		1		1		1				
	5		4		5		4	2		4	
	17		17		17		17	1		1	7
	•		•		•		•	•			•
	•		•		•		•		•	•)
	•		•		•		•	•	•	•	•
9	•		•		•		•				
i i	•		•		•		•		<u>'</u>		<u>, </u>
	•		•		•		•				•
	•		•		•		•				
220	0-240	220	0-240	22	0-240	220	0-240	220-	-240	220-	240
	400	6,	,900	7,	,400	6,	,900	4,6	000	3,7	00
	110		110		110	1	110	11	10	11	0
į.)
1.40	145	2.20	190×210	1.40	145	2.20	190×210	1.80	180	1.80	180
2.20	190x210	1.40	145	2.20	190×210	1.40	145	1.40	145	1.40	145
2.20	240	2.20	240	2.20	240						
1.80	180	2.20	190×210	1.80	180	2.20	190×210	1.80	180	1.80	180
2.20	190×210	1.80	180	2.20	190×210	1.80	180	2.20	210	2.20	210
ą.											
		3.6	380×210								
3.6	380x210			3.6	380x210	3.6	380x210				
	.20		3.70		2.20		3.70	3.		3.0	
	.70	2	2.20		3.70 3.70	2	2.20	2.:	20	2.2	20
				-	3						
3	1.10	3	3.70	3	3.10	3	3.70	3.	10	3.0	00
	.70		3.10 I (EC) No 1275/200		3.70		3.10	3.		3.0	00

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.


14.6kW power output (20A); Current management options for 16A, 13A or 10A connection. *MasterPartner® and AAR product only.

CERAMIC HOBS



Quick by name, quick by nature

With their frameless design, our Ceramic hobs stand out in any kitchen, and a whole range of options with up to 17 power settings makes preparing the next feast as easy as pie. And as cooking is all about creativity and individual taste, our enhanced touch control panel provides full flexibility over your cooking.

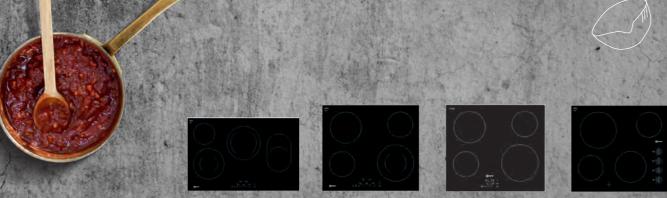

Jan 19	THE RES				P. T. Market	100 miles		A PART OF THE PART	(975)(E.D.)	
HOB TYPE		QUICKLIGHT HOBS								
COLLECTION		N 70		N	N 70		N 50		30	
MODEL NO.		T18FI	D36X0	T16FI	D56X0	T10E	340X2	T16F	K40X0	
COLOUR										
Width	mm	8	02	5	92	5	92	5	92	
Control position		Fre	ont	Fre	ont	Fr	ont	Si	ide	
Control type		Touch	Control	Touch	Control	Touch	Control	Contr	ol Dials	
Style		Front	Bevel	Front	: Bevel	Fram	neless	Bevelled	Front Edge	
FEATURES										
Number of individual zones			4		4		4		4	
No. of dual zones			2		1					
No. of extendable zones			1							
Power Boost		Center; F	ront Left	Front	: Right					
Power levels		1	7	1	17	1	17		9	
Digital display			•		•		•		•	
Restart function		•	•		•		•			
Energy consumption display			•		•					
Main on/off switch		•	•		•		•			
Keep warm function		•	•		•					
SAFETY FEATURES										
Residual heat indicator		•	•		•		•		•	
Timer with automatic switch off for each zo	one	•	•		•		•			
Control panel lock		•	•		•		•			
Safety time switch off		•	•		•		•			
Wipe protection function			•		•					
PERFORMANCE/TECHNICAL INFORMATION										
Nominal voltage	V		-240		-240		1-240		-240	
Maximum power output	W		300		000		600		500	
Electrical cable length	cm	1	10	1	10	1	10	1	10	
GB plug										
Rear left zone	kW/mm	1.2	145	2.0	180	2	180	2.2	210	
Rear right zone	kW/mm			1.2	145	1.2	145	1.2	145	
Rear centre zone	kW/mm	1.7-2.4	180-230							
Front centre zone	kW/mm									
Front left zone	kW/mm	0.8-2.1	120-210	1.2	145	1.2	145	1.2	145	
Front right zone	kW/mm	1.8-2.6	170-265	0.8-2.1	210	2.2	210	2	180	
Rear left zone – with Power Boost	max. kW									
Rear right zone – with Power Boost	max. kW									
Rear centre zone – with Power Boost	max. kW	3	.4							
Front centre zone – with Power Boost	max. kW									
Front left zone – with Power Boost	max. kW									
Front right zone – with Power Boost	max. kW	2	.6	2	.6					

Il models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption

14.6kW power output (20A); Current management options for 16A, 13A or 10A connection. *MasterPartner® and AAR product



DOMINO HOBS



Mix and match your own unique hob

NEFF Domino hobs allow you to combine different cooking zones to create a hob which reflects how you like to cook. With the option to mix and match our gas, Flex Induction and Teppan Yaki Domino hobs, cooking variety is made possible without taking up too much of your work surface. Offering a contemporary Japanese-inspired mode of cooking, our Teppan Yaki Domino hob is designed for direct contact cooking. Ideal for fish, meat and vegetables, try combining with a gas or induction hob to create a truly creative hob.

Connecting Your Domino Hobs It's simple to mix and match your Domino cooking zones using our connecting links accessory kit (Z9914X0). With a brushed steel design, our connecting kit creates a stylish and flexible

hob effect.






COMPLETE
FLEXIBILITY
FOR TRULY
CREATIVE
COOKS

Find out more about NEFF domino hobs at neff-home .com/uk/

When only a custom design will do, our Domino hobs offer the ultimate bespoke solution.











HOB TYPE		TEPPAN YAKI	FLEXINDUCTION	RADIANT		GAS DO	OMINO
COLLECTION				QUICK			
MODEL NO.		N 70 N74TD00N0	N 70 N53TD40N0	N 7 N13TD		N 90 N23TA19N0	N 90 N23TA29N0
DESIGN		N/41D00N0	N331D40N0	NISID	/20INU	NZJIATJINU	NZ3 IAZ9NU
Width	mm	396	306	30	16	306	306
Control position	mm	Front	Front	Fro		Front	Front
		Touch control	Touch control	Touch c		Touch control	Touch control
Control type		Ceramic glass /					
Style		Stainless steel	Ceramic glass	Bevelled fr	ront edge	Ceramic glass	Ceramic glass
FEATURES							
FlameSelect®			1			•	•
FlexInduction zones			1				
Number of individual zones		2	2	2		1	2
No. of dual zones/dual circuit wok style	burner			1		1	
No. of extendable zones		1	1				
Power Boost			•	•)		
Pan Boost			•	•)		
Power levels		17	17	17	7	9	9
Digital display		•	•			•	•
Timer with automatic switch off for each zone		•	•				
Keep warm function		•	•				
Wipe protection function			•				
Pre-set for natural gas						•	•
Safety cut-out facility						•	•
Low profile single piece burners						•	•
Cast iron pan supports						•	1
SAFETY FEATURES							
Main on/off switch		•	•	•	•	•	•
Two stage residual heat indicators		•	•	•)	•	•
Safety lock		•	•	•)		
Timed safety switch off		•	•	•	•		
PERFORMANCE/TECHNICAL INFORMAT	ION						
Nominal voltage	V	220-240	220-240	220-	240	220-240	220-240
Maximum power output	W	1,900	3,700	3,50	00	6,000	4,700
Electrical cable length	cm	100	110	10		100	100
GB plug							
Rear zone	kW/mm	0.95	2.2	1.2	145		2.80
Front zone	kW/mm		2.2	1.0 2.0	120/180		1.90
Centre/centre front burner power	kW					6.0	
Extended flexInduction	kW/mm		3.3				
Rear zone – with power Boost	max. kW		3.7				
Front zone – with power Boost	max. kW		3.7	2.:	3		
STANDARD ACCESSORIES							
Removable ceramic glass cover		•					
Teppan Yaki spatula		•					
Wok stand						•	
LPG jets						•	•
OPTIONAL ACCESSORIES							
Connecting links for installation with domino hob		Z9914X0	Z9914X0	Z991	4X0	Z9914X0	Z9914X0
Set of four pans (3 x pans, 1 x sauté par	n)		Z9442X0				
Rectagular roasting pan with lid (approx. 320x200mm)			Z9410X1				
Steamer pan insert of use with HEZ39001 pan	11 roasting		Z9415X1				
Teppan Yaki (approx. 300x200mm)			Z9417X2				
Teppan Yaki (approx. 400x200mm)			Z9418X0				
Griddle plate (approx. 400x200mm)			Z9416X2				
	NAME OF STREET	NAME OF TAXABLE PARTY.	CANAL CARREST	CALLS IN	TATE PARK IN	DALCE O MESON MESON	THE RESERVE OF THE PARTY OF THE

GAS HOBS



A true favourite amongst passionate cooks

Offering burner positioning which suits your cooking style, our gas hobs provide a robust and reliable solution for contemporary kitchens. Allowing you to physically see when more or less heat is directed to your cooking, gas remains a popular choice for passionate cooks with exacting standards. With sturdy cast iron pan supports for all of your favourite cookware, simply remove the supports once cool to easily clean the ceramic glass surface.



WHEN ONLY COOKING ON GAS WILL DO

















T29TA79N0 Gas Hob (918mm width)

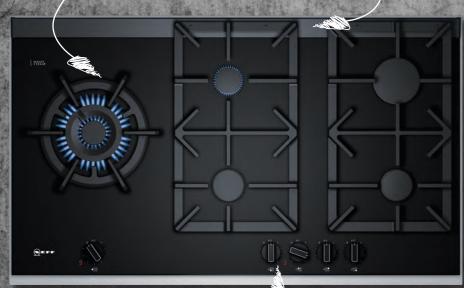

Illuminated display for power levels


SEARING, BOILING AND FLAMBÉING

DESIGN PERFORMANCE







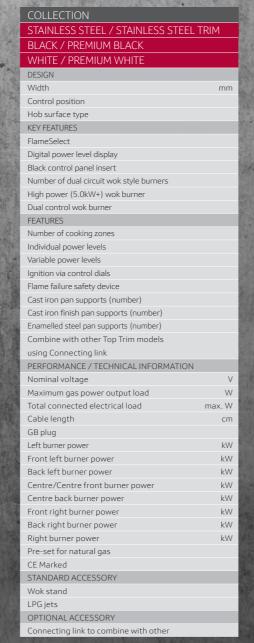

N 90	N 90	N 90	N 70	N 70	N 70
T29TA79N0	T27TA69N0	T26TA49N0			
			T27CA59S0	T27CS59S0	T26CA42S
918	750	606	752	752	590
Front	Front	Front	Front	Front	Front
Ceramic glass	Ceramic glass	Ceramic glass	Tempered glass	Tempered glass	Tempered gla
•	•	•	•	•	•
•	•	•			
1	1		1	1	
•	•		•	•	
5	5	4	5	5	4
9	9	9	9	9	9
•	•	•	•	•	•
•	•	•	•	•	•
3	2	2	5	5	4
•	•	•			
•	•	•			
220-240	220-240	220-240	220-240	220-240	220-240
13,700	11,900	7,700	11,500	11,500	7,500
2.0	2.0	2.0	2.0	1.1	1.1
150	100	100	100	100	100
6.00					
	1.90	1.90	1.00	1.00	1.75
	1.90	1.10	1.75	1.75	1.75
1.10	4.20		4.00	4.00	
1.90					
1.90	1.10	1.90	1.75	1.75	1.00
2.80	2.80	2.80	3.00	3.00	3.00
	•				•
•	•	•	•	•	•
•	•				
28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mba

GAS HOBS



Ingenious flames

For some cooks, there's nothing like preparing meals with flames. Our gas hob range provides you with the tool you need, no matter if you want stir-fry or slow-cook. Our 9-level FlameSelect® allows you to adjust the flame just like on an electric hob, making cooking even easier. With a range of sizes available, our hobs are ready for almost any kind of pot you can think of. Like Asian style? With our Dual Wok you have two flame rings stacked on top of each other – an ingenuous idea to adjust two flames for one delicious task.

Gas Hob (915mm) width)	N 70
	Wok burner	Cast iron pan supports
8		


Illuminated display for power levels

DESIGN PERFORMANCE

70 neff-home.com/uk/



COLLECTION	A LOSSINGER
STAINLESS STEEL / STAINLESS STEE	L TRIM
BLACK / PREMIUM BLACK	
WHITE / PREMIUM WHITE	
DESIGN	
Width	mm
Control position	
Hob surface type	
KEY FEATURES	
FlameSelect	
Digital power level display	
Black control panel insert	
Number of dual circuit wok style burners	
High power (5.0kW+) wok burner	
Dual control wok burner	
FEATURES Number of cooking zones	
Individual power levels	
Variable power levels	
Ignition via control dials	
Flame failure safety device	
Cast iron pan supports (number)	
Cast iron finish pan supports (number)	
Enamelled steel pan supports (number)	
Combine with other Top Trim models using Connecting link	
PERFORMANCE / TECHNICAL INFORMATION	V
Nominal voltage	V
Maximum gas power output load	W
Total connected electrical load	max. W
Cable length	cm
GB plug	
Left burner power	kW
Front left burner power	kW
Back left burner power	kW
Centre/Centre front burner power	kW
Centre back burner power	kW
Front right burner power	kW
Back right burner power	kW
Right burner power	kW
Preset for natural gas	
CE Marked	
STANDARD ACCESSORY Wok stand	
LPG jets	
OPTIONAL ACCESSORY	



CAR STANDARDON	10 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m		Very Separate	RECEIVED THE RESERVE
	KI NOK IN			
			1	
- 0000	- \$0\$00	- 20200		0000
		4. 1000	The state of	

N 70	N 70	N 70	N 70		
	T29DA69N0	T27DA69N0	T26DA59N0		
T26CS49S0					
590	915	750	582		
Front	Front	Front	Front		
Tempered glass	Metal	Metal	Metal		
•	•	•	•		
	•	•	•		
	•	•	•		
	1	1	1		
	•	•			
	•	•	•		
4	5	5	4		
9	9	9	9		
9	9	9	9		
•	•	•	•		
•	•	•	•		
4	3	3	2		
·					
220-240	220-240	220-240	220-240		
7,500	12,500	12,500	8,000		
2.0	2.0	2.0	2.0		
100	150	100	100		
1.75	1.00	1.00	1.75		
1.75	1.75	1.75	1.75		
	5.00	5.00			
1.00	1.75	1.75	1.00		
1.00	1.75	1.75	1.00		
3.00	3.00	3.00	3.50		
•	•	•	•		
•	•	•	•		
•					
	•	•			
28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar		

GAS HOBS



A true favourite amongst passionate cooks

Cooking with gas is a tried and tested medium. Its reliability, responsiveness and versatility have earned it the loyalty of both amateur and professional cooks alike. Our range of gas hobs all feature FlameSelect[®], innovative technology that gives you more control options to select precise heat to suit whatever you are cooking.














T27DS59N0 / T27DS59S0

Gas Hobs, available in Black glass or Stainless Steel (750mm width)

N 70

Cast iron pan supports

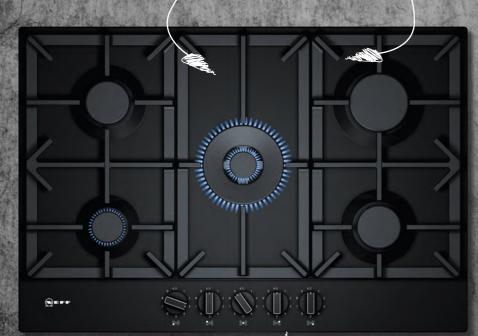

Illuminated display

for power levels




T27DS59S0

DESIGN PERFORMANCE







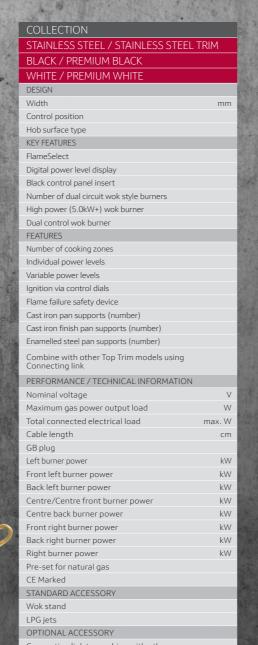

The second second	。			
N 70	N 70	N 70	N 70	N 70
T29DS69N0	T27DS79N0	T27DS59N0	T26DS59N0	T26DS49N0
		T27DS59S0		T26DS49S0
		127533330		12003 1330
915	750	750	582	582
Front	Front	Front	Front	Front
Metal	Metal	Metal	Metal	Metal
. reta	. ieta.	· ica	. icto	i ieta.
•	•	•	•	•
1	1	1	1	
•	•			
•	•			
5	5	5	4	4
9	9	9	9	9
•	•	•	•	•
•	•	•	•	•
3	3	3	2	2
220-240	220-240	220-240	220-240	220-240
12,500	12,500	11,500	8,000	7,500
1.1	1.1	1.1	1.1	1.1
150	100	100	100	100
	5.00			
1.00	5.00	1.00	1.75	1.75
1.75		1.75	1.75	1.75
5.00	1.00	4.00	1.75	1.75
5.00	1.75	4.00		
1.75	1.75	1.75	1.00	1.00
3.00	3.00	3.00	3.50	3.00
3.00	5.00	3.00	3.30	5.00
•	•	•	•	•
•	•	•	•	•
28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar
A STATE OF THE PARTY OF THE PAR	MARKET PROPERTY OF THE PROPERT	CONTRACTOR OF THE PARTY OF THE	THE RESERVE OF THE PARTY OF THE	

GAS HOBS

A true favourite amongst passionate cooks

Searing, boiling and flambéing on flames resonates with the primal cook in all of us. NEFF gas hobs combine the style and reliability that cooks expect from this powerful method of cooking. Browse the range to find a size and style which reflects your way of cooking.





是是是學學學學		AT THE PERSON NAMED IN	A STATE OF THE STA
COLLECTION	MET CAPITAL RESIDENCE AND CONTROL OF THE CONTROL OF	N50	N50
STAINLESS STEEL / STAINLESS ST	EEL TRIM	T27BB59N0	T26BB59N0
BLACK / PREMIUM BLACK			
WHITE / PREMIUM WHITE			
DESIGN			
Width	mm	750	582
Control position		Front	Front
Hob surface type		Metal	Metal
KEY FEATURES		rictar	rictal
FlameSelect			
Digital power level display			
Black control panel insert			
Number of dual circuit wok style burners		1	1
High power (5.0kW+) wok burner			
Dual control wok burner		•	•
FEATURES			
Number of cooking zones		5	4
Individual power levels			
Variable power levels		•	•
Ignition via control dials		•	•
Flame failure safety device		•	•
Cast iron pan supports (number)		3	2
Cast iron finish pan supports (number)			
Pan Supports Dishwasher safe			
Combine with other Top Trim models using	Connecting link		
PERFORMANCE / TECHNICAL INFORMAT	ION		
Nominal voltage	V	220-240	220-240
Maximum gas power output load	W	10,800	7,800
Total connected electrical load	max. W	1.1	1.1
Cable length	cm	150	100
GB plug			
Left burner power	kW		
Front left burner power	kW	1.00	1.75
Back left burner power	kW	1.75	1.75
Centre/Centre front burner power	kW	3.3	
Centre back burner power	kW		
Front right burner power	kW	1.75	1.00
Back right burner power	kW	3.00	3.30
Right burner power	kW		
Pre-set for natural gas		•	•
CE Marked		•	•
STANDARD ACCESSORY			
LPG jets		28-30/37mbar	28-30/37mbar







COLLECTION		N 50	N 30
STAINLESS STEEL / STAINLESS STEEL	TRIM		T26BR46N0
BLACK / PREMIUM BLACK		T26CB49S0	T26BR46S0
WHITE / PREMIUM WHITE			T26BR46W0
DESIGN			120511101110
Width	mm	590	580
Control position		Front	Right Side
Hob surface type		Tempered glass	Metal
KEY FEATURES			
FlameSelect			
Digital power level display			
Black control panel insert			
Number of dual circuit wok style burners			
High power (5.0kW+) wok burner			
Dual control wok burner			
FEATURES			
Number of cooking zones		4	4
Individual power levels			
Variable power levels		•	•
Ignition via control dials		•	•
Flame failure safety device		•	•
Cast iron pan supports (number)		2	
Cast iron finish pan supports (number)			2
Pan Supports Dishwasher safe			
Combine with other Top Trim models using Con	necting link		
PERFORMANCE / TECHNICAL INFORMATION	1		
Nominal voltage	V	220-240	220-240
Maximum gas power output load	W	7,500	7,400
Total connected electrical load	max. W	1.1	0.8
Cable length	cm	100	100
GB plug			
Left burner power	kW		
Front left burner power	kW	1.75	3.00
Back left burner power	kW	1.75	1.70
Centre/Centre front burner power	kW		
Centre back burner power	kW		
Front right burner power	kW	1.00	1.00
Back right burner power	kW	3.00	1.70
Right burner power	kW		
Pre-set for natural gas		•	•
CE Marked		•	•
STANDARD ACCESSORY			
LPG jets		28-30/37mbar	28-30/37mbar

COOKER HOODS



A hood for every cookaholic

NEFF hoods are designed to cater for every Cookaholic's kitchen. Efficient, quiet and equipped with features such as built-in ambient lighting, the design and placement of your hood can be as flexible, and stylish, as your living space.



WHY IS VENTILATION SO IMPORTANT?

With the increase of open plan living, choosing the right quality ventilation solution has never been so important. Your hood needs to be quieter and more powerful to maintain the perfect living environment.

THE COLLECTION

The finishing touch to the perfect kitchen

At NEFF, we understand that selecting the right hood to complement your kitchen and cooking style can sometimes be challenging. To help you select the right cooker hood for you, we've categorised all our models into easy-to-follow Collections based on product features, control display and design.

N 90

STYLES OF HOODS

- Box Chimney

- Analed

FEATURES

THIS COLLECTION CAN INCLUDE*:-

Touch Control with display

Premium design coordination

LED lights

Fully automatic hood with Hob Hood

Climate Control Sensor

Ambient Light

Efficient Drive Motor for quiet

Dishwasher proof metal grease filters

Regenerative Clean Air recirculation

N 70

STYLES OF HOODS

- Ceiling



FEATURES

THIS COLLECTION CAN INCLUDE*:

Touch Control or Soft Touch buttons

Premium design coordination

LED lights

Ambient Light

Efficient Drive Motor for quiet

Dishwasher-proof metal grease

Regenerative Clean Air recirculation

N 50

STYLES OF HOODS

- Box Chimney Ceiling

FEATURES

THIS COLLECTION CAN INCLUDE*:

Touch Control or Soft Touch buttons

High quality design coordination LED lights

Regenerative Clean Air recirculation

N 30

STYLES OF HOODS

- Glass Chimney Telescopic
- Box Chimney Canopy
- Slim Pyramid Integrated

FEATURES

THIS COLLECTION CAN INCLUDE*:

Push Button or Rocker Switch controls

High quality design

LED or Halogen lights

Dishwasher-proof metal grease filters

Regenerative Clean Air recirculation filte

ISLAND SOLUTIONS



Simply eye-catching

If you like a contemporary-styled kitchen with an island cooking area, our island cooker hoods can add an inspiring focal point. A kitchen island, being in the centre of the kitchen, provides a hub for cooking, entertaining and socialising in one of the most used rooms in the home.



CEILING HOOD AND HOB

Kitchen islands are an ideal space for you to experiment with ingredients and entertain your guests. By incorporating your NEFF hob and ceiling cooker hoods within your island, you'll have more useful kitchen space and a fresh, clean atmosphere.



DOWNDRAFT HOOD

If you're looking for powerful ventilation without disturbing anyone while preparing meals, our Downdraft hood is a great choice.



VENTING HOB

The venting hob will give you freedom from conventional wall or island mounted hoods; our integrated hob and hood allows you to reclaim your space. Strong performance, extremely silent and outstanding design.



ISLAND CHIMNEY HOOD

Our stylish island extractor hoods include advanced features to ensure your kitchen is free from smells whilst you cook.

CEILING HOODS



Access all areas

With our ceiling installation cooker hoods, the hobs can be accessed from all sides. Many of these hoods feature Home Connect Smart Technology and let you control the ventilation from the hob or using a voice assistant, as well as a conventional remote.



KEY FEATURES

- © Control your hood with both your smart device and voice command with Home Connect.
- Make your hob and hood work in harmony with Hob Hood Control, perfect for keeping your hands free, and focus, on the cooking.
- Achieve high extraction rates with quiet noise levels thanks to our Efficient Drive motor.
- Adjustable LED white colour temperature
- Comes with a remote control for easy setup and control.

- Recirculation is also possible with a separate recirculation module. This includes either a CleanAir filter or a Regenerative Filter which is longer lasting for 10 years – simply regenerate in the oven every 4 months.
- © Create custom experiences e.g. ambient lighting change colour when you start cooking on an island
- You have total flexibility with regards to your hob configuration.
- There is no compromise in terms of island storage. Allowing you to make the most of your drawers and cupboards

78 neff-home.com/uk/

INTEGRATED FURNITURE HOODS

A great fit

When cooking up a meal for friends and family the last thing you want is the noise of a hood in the background. Our integrated furniture hoods are built to operate on low noise levels while maintaining high air quality in your kitchen. Choose between telescopic and integrated hoods to find the hood that fits your kitchen, and cooking style, best.





TELESCOPIC HOOD

required.

For a smaller kitchen where space is

at a premium, these clever hoods pull

out from underneath a cabinet when

INTEGRATED HOOD

These hoods look like they're part of the furniture. Hidden behind a unit door, they simply pull out when needed



CANOPY HOOD

Designed to fit neatly under an overhead unit, Canopy Hoods are discreet and save valuable kitchen space.



WALL MOUNTED HOODS

For a fantastic atmosphere

Hoods installed on the wall can be used to create a design feature in themselves, adding a focal point to your kitchen while offering powerful extraction for all types of cooking. Choose from a range of styles to suit your kitchen design, including the trendy Creative Slim hoods or Angled Glass hoods with features such as Ambient Light that let you express yourself with colour, as well as your cooking. And if choosing to install in recirculation, the hood can be fitted without a chimney piece for a sleeker finish to your hood installation.



ANGLED GLASS

Our black glass chimney hoods perfectly coordinate with our ovens and the NEFF Induction hob range.



FLAT SLIMLINE

Our black Flat Slimline Chimney Hoods create a sleek finish to your kitchen and coordinate with the NEFF Induction hob range.



GLASS CHIMNEY

Stylish stainless steel design and clear glass canopy in either a flat or curved design.



BOX CHIMNEY

The focal point of any kitchen, our chimney hoods are modern and eye-catching. With a vast range of designs, each provides the ideal mix of style and performance.



PYRAMID CHIMNEY

Ideal when you're trying to achieve the look of a modern kitchen, our stainless steel Pyramid Hoods are stylish and striking.



SLIM PYRAMID CHIMNEY

Our classic design hood with a modern twist – experience the slim pyramid hood.

WORKTOP INSTALLATION

FREES UP YOUR SPACE

f you're looking for powerful ventilation without disturbing anyone while preparing meals, our Downdraft Hood is a great choice. Devised for kitchen islands, it coordinates beautifully with our induction hobs. The Downdraft Hood is simply built into your worktop or kitchen furniture. Rising at the touch of a button, it gets to work quietly and effectively. You can choose between 3 power levels and 2 intensive levels, using TouchControl. Once activated, the hood can even act as an automatic air freshener: it runs five minutes every hour to keep your kitchen atmosphere nice and fresh – a clever idea for parties.



If you're looking for powerful ventilation without disturbing anyone while preparing meals, our Downdraft Hood is a great choice.

80 neff.co.uk 81

HOODS FEATURES & FUNCTIONS



Because every cook has their own unique cooking style

Looking for powerful extraction without distraction? Our advanced range of hoods have been designed for those who long for a premium look in the kitchen. Proud of its continuous innovations in cooker hoods, NEFF has a range of features and functions to suit every cooking style.

READY FOR A NEW KITCHEN?

Get inspiration, advice and more on the NEFF Inspiration Hub. You'll find articles by professional designers, installation advice and gallerion of real NEFF kitchens to help you create a room that's right for you.

Visit Neff-home.com/uk/design-ideas to see how other people and professional designers are creating their NEFF kitchens



KEY FEATURES



HOME CONNECT – Control all functions and settings of your hood directly from your smart phone and voice control for the ultimate connected cooking experience.



HOB HOOD CONTROL – Being able to control the hood directly from the hob means the hood turns on when you start cooking and, in automatic mode, can automatically regulate the power level for the best performance with the lowest noise - it also means you no longer need to worry about adjusting the hood and you can focus on your cooking.



CLIMATE CONTROL – Detects the amount of steam and smells using a sensor attached to the motor and automatically sets the most effective power level to extract it.



AMBIENT LIGHT – Illuminates your kitchen in the light that suits the occasion best. Choose from 31 colours to change how your kitchen looks and, most importantly, how it makes you feel.



EFFICIENT DRIVE MOTOR – Save energy and enjoy a noise free, illuminated kitchen environment thanks to our ultra-efficient high-speed extractor hood fan, with Efficient Drive motor technology and LED



NEFF SILENCE BUTTON - The unique noise reduction function reduces the fan noise by a couple of decibels, ensuring that the kitchen stays quiet while you cook and entertain your quests. This function can be used at any fan setting except fan setting 1.



SATURATION INDICATORS - Take the stress out of guessing, this function will prompt you if the grease filters should be cleaned. If the hood is installed in recirculation, this will also indicate when the charcoal filters need replacing.



BOOST POSITION For our sleek angled glass and flat hoods, receive an extra boost of extraction performance in special cooking situations, for example when frying meat or fish. The front panel can be slightly opened during cooking to a defined extraction boost position in order to increase the steam catching rate of the hood and keep your kitchen free from steam.

FEATURES & FUNCTIONS

AUTOMATIC AFTER-RUNNING

Continues running at a low speed for 3-30 minutes before turning itself off. Perfect for keeping fresh air in the kitchen post cooking.

NEFF FRESH AIR

Runs an automatic air exchange programme, turning the hood onto power level one for five minutes every hour for as long as required.

INTENSIVE SETTING

Boosts the extraction rate to the maximum level to cope with particularly demanding cooking conditions.

AUTOMATIC REVERT

Automatically reverts the hood back to a lower power level after approximately ten minutes of being on the intensive setting.

ELECTRONIC POWER LEVEL DISPLAY

The sleek display clearly shows the selected fan power

SOFT LIGHT

Brightens or dims the lights as it's switched on or off; just press and hold to adjust the level of brightness

KEEP YOUR KITCHEN UNDER CONTROL



HOME CONNECT

Compatible with Amazon Alexa and Google Assistant.







TOUCH CONTROL

Featured on selected models in the N90, N70 and N50 Collections, Touch Control flawlessly complements our ovens and compact appliances. An LED display is also available with selected Touch Control models.



SOFT TOUCH CONTROL

Available across selected models within the N70 and N50 Collection, our Soft Touch Control hoods allow for greater control over power levels. Selected models also feature a white LCD screen.



PUSH BUTTON

Our classic hoods feature simple, sleek and easy to use push button controls. Available across selected models in the N30 Collection.



REMOTE CONTROL Available across all Ceiling

Hood models.



ROTARY SWITCH CONTROL

Featured on selected Canopy Hood models within our N70 Collection, our Rotary Switch Control features a pop-out dial with 3 levels of power to choose from. When not in use the dial can be neatly popped back into place.





ROCKER OR SLIDER SWITCH CONTROL

Available on our N30 Telescopic and Canopy models, our rocker or slider switch control offers a simple and straight forward setting navigation that's neatly concealed within the hood furniture.

82 neff-home.com/uk/

HOB HOOD CONTROL



Fresh air right when you need it

Gone are the days that you need to worry about setting your hood to the relevant setting. When you start cooking on the hob, our hoods will automatically switch on, light up and adapt an extraction level suited to the amount of steam and odours detected. Available across selected models within our Ceiling and Wall Installation ranges, Hob Hood Control allows you to focus purely on the cooking and keep messy hands where they should be.



Hob Hood Control available with our stylish ceiling hoods



Hob Hood Control available with our sleek, modern Angled Hood with Ambient Lighting



Hob Hood Control available with our statement Box Island Hood



Hob Hood Control available with our wall installation Box Chimney Hood

AMBIENT LIGHT

Illuminates your kitchen in the light that suits the occasion best. Choose from up to 31 colours to change how your kitchen looks and, most importantly, how it makes you feel.



LIGHTING

Warm and welcoming lighting - the true mark of a kitchen

Illuminate your kitchen in the light that suits the occasion best with our new ambient light feature. With many of our extractor hoods incorporating energy-efficient LED lighting, creating a warm, inviting space is

always part and parcel of a NEFF kitchen. With a welcoming ambience and quiet extraction, our hoods are

designed with sociable kitchens in mind. With the power to ventilate even the most spacious open-plan living areas, odours and steam are effectively eliminated without extraction noise drowning out the conversation.

THE LIGHT CREATED BY A NEFF EXTRACTOR HOOD

WILL COMPLEMENT THE WHOLE KITCHEN LIGHTING SCHEME.

LED

LED lighting not only provides bright, enduring illumination for your kitchen, but is also extremely energy efficient, consuming up to 85% less energy than an equivalent five year old model with halogen lights. Our LED lighting lasts for up to 40,000 hours.



HALOGEN SPOTLIGHTS

Halogen lights are small, tidy and provide crisp colour and good illumination. Halogen bulbs are also long-lasting.



ADJUSTABLE LED WHITE COLOUR TEMPERATURE

Perfect for setting the mood or matching to other kitchen lighting. Using the Home Connect App with selected models, you can adjust the white colour temperature between 2,700K – 5,000K.

CLIMATE CONTROL SENSOR

A FULLY AUTOMATED HOOD

Also available across selected premium hood models is our clever Climate Control Sensor feature. Benefits you can expect with a Climate Control Sensor hood are:

- Turn on the hob and the hood comes to life, including the lights
- The hood is completely automatic, so you can enjoy worry-free cooking
- The sensor constantly monitors cooking smells and steam
- The fan speed will automatically adjust to what you're cooking
- The hood will turn itself off when no steam or smells are detected

Choose a hood with Climate Control Sensor for maximum performance and minimum energy consumption.



HOME CONNECT HOODS



Innovation is here, and it's delicious

Keep your eyes on your cooking, not the hood controls with our Wi-Fi connected hoods in the N90 and N70 collections. Make adjustments to ventilation speed and lighting from the Home Connect app, via voice command or via the hob with Hob Hood Control. Alternatively, let our fully automatic hood adjust to vapours and aromas without you lifting a finger. Once connected, you can also choose to receive notifications about when your grease filters need cleaning or recirculation filters need replacing.


HOME CONNECT IS COMPATIBLE WITH AMAZON ALEXA AND GOOGLE ASSISTANT



amazon







FULLY AUTOMATIC HOOD

KEEP YOUR HANDS ON THE COOKING

One of these fine features is the link between our Cooktop-based Hood Control and the hood's Automatic Air Sensor. Since they complete each other in harmony, the fully Automatic Hood is also managed via your hob, all you need to do is to turn it on. The hood automatically adjusts to the level of steam, while you cherish the next level of cooking comfort. What's more both appliances can be connected to your WI-FI and the hood automatically adapts the extraction rate to the cooking odours and vapours it detects. You can even adjust the extraction via the Home Connect app or using the dial on the wistPadFire® cooktop – there's a control option to suit any mood





EFFICIENT DRIVE

Most of our hoods are exceptionally quiet thanks to our brushless Efficient Drive motor. However, noise is also determined by the length and type of ducting used and the installation surroundings. To provide a more meaningful measure of noise specific to the appliance, we state Sound Power in dB(A) re 1pW. With this system, there are strict quidelines for measuring the noise level, enabling you to easily compare our range and to give a closer indication of likely noise levels once the hood is installed.



NEFF SILENCE

NEFF provides a range of ventilation solutions with our NEFF Silence function to reduce noise levels on demand with more control. Simply select this function to reduce the power level by a half level, offering more control over your extraction and noise levels in a busy kitchen.

QUIETHOODS

That won't drown out the conversation Silence is the gateway to little tales of food poetry. Have you heard the one about

sizzling onions? Or the epic story about a searing steak? Our low-noise motor

makes it possible to listen to your own kitchen story. Would you like to know the secret? It's audible relaxation that takes your creativity to new adventures.

NOISE FOCUS

All hoods undergo detailed acoustic testing and we even look at the frequencies of the sound waves to make sure any sound is as pleasurable to the human ear as possible. Then Go into NEFF SILENCE button to go between power levels either on the hood or HomeConnect.






86 neff-home.com/uk/

EXTRACTION OR RECIRCULATION?


The best way to remove steam and odours is to extract the air out of the room through ducting. Unfortunately, in apartments or where the hood is too far away from an outside wall, this may not be possible. In this case, the only alternative is to recirculate the air. Stale air is sucked through a grease filter, before being purified in a charcoal filter, and then pumped back into the kitchen via an opening in the hood.

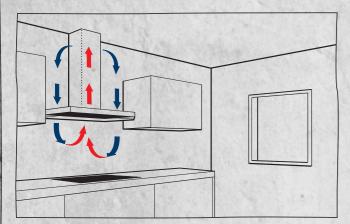



Recirculating

Removes between 70-95% of odours depending on filter used. Requires changing of charcoal filter on a regular basis or a longer-lasting Regenerative filter for certain models can be used.



Extraction

Ducted

Removes up to 98% of odours in an optimal installation. Requires planning of ducting (ducting to be sourced separately), however doesn't require a recirculation charcoal filter.

USE THE FOLLOWING EQUATION TO CALCULATE YOUR EXTRACTION RATE:

Volume of kitchen (length x width x height) eg. $4m \times 3m \times 2.5m = 30m^3$

6 x volume in normal operation and 12 x volume in intensive operation.

Please note that these are recommended estimates only to be used as a guide. This assumes a 2.5m standar

IDENTIFY YOUR EXTRACTION RATE

Your extractor needs to circulate the air in the room 6 times in normal operation, 12 times in intensive operation, per hour. Use the below to hel identify the required extraction rate which can then be used to select the appropriate extractor.

		ACRES SECTIONS	以1981年 及201日日 100日 100日 100日		SEED WASHING
2.5m	3m	3.5m	4m	4.5m	5m
16m³	- AL		30000000000000000000000000000000000000		
19m³	23m³				
22m³	26m³	31m ³	No. of F		A STA
25m³	30m³	35m³	40m³		
28m³	34m³	39m³	45m³	51m³	
31m³	38m³	44m³	50m ³	56m³	63m³
	16m³ 19m³ 22m³ 25m³ 28m³	16m³ 23m³ 22m³ 26m³ 25m³ 30m³ 28m³ 34m³	16m³	16m³ 19m³ 23m³ 22m³ 26m³ 25m³ 30m³ 35m³ 40m³ 28m³ 34m³	16m³ 19m³ 23m³ 22m³ 26m³ 31m³ 25m³ 30m³ 35m³ 40m³ 28m³ 34m³ 39m³ 45m³



REGENERATIVE RECIRCULATION FILTERS

The new Regenerative Charcoal Filters give you a long lasting filter, thanks to a regenerative process using your oven, and can even be installed without a chimney piece if preferred. Benefit from up to 95% odour reduction when in recirculation mode.



RECIRCULATION FILTERS

We offer a range of recirculation filters that are available depending on the model of hood you choose. Featuring powerful odour reduction rates and performance benefits, our new regenerative filters can last up to 10 years and are regenerated through a heating process in the oven every 4 months.

1	TYPE:	STANDARD ODOUR FILTER	CLEANAIR PLUS FILTER	LONG LIFE REGENERATIVE FILTER
	ODOUR REDUCTION	Up to 85%	Up to 95%	Up to 95% (Up to 86% if installed without a chimney)
REC	COMMENDED EXCHANGE	Approx. 2 times per year	Approx. once per year	Approx. once every 10 years
KI	EY BENEFITS	Simple installationAnti-fish treatment	 Up to 3dB (A) sound reduction Better extraction performance Anti-fish treatment Removes over 99% of all pollen 	 Up to 3dB (A) sound reduction Regenerated in the oven every 4 months recommended (2 hours 200°C) Better extraction performance
IN	STALLATION	Behind grease filter, inside the hood	Extra module attached to hood chimney (stainless steel) New Chimney Hoods: Integrated plastic module fitted inside the chimney piece	Extra module (as per CleanAir filter) onto chimney or inside chimney. 'Chimless' installation possible (Angled and Flat only)
IN	STALLATION WITHOUT CHIMNEY POSSIBLE?	Yes (Angled and Flat only)	Yes (Angled and Flat only)	Yes (Angled and Flat only)
THE RESERVE		THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER. THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER.	THE RESERVE TO SHARE AND ADDRESS OF THE PARTY OF THE PART	THE RESERVE OF COMMERCE AND ADDRESS OF THE PARTY OF THE P

CleanAir Plus and Regenerative filters not available for all styles of hood. Additional module may be required to house the filter. Images for example only, different filters may come in a different size and style.

INSTALLATION

The following points should be observed for optimum ducted extraction results and low noise:

- Ensure any pipe elbow bends are at least 30cm from the hood ducting opening.
- Avoid reducing the diameter or area of the ducting.
- Use wide-angled pipe elbows, but keep the number used to a minimum.
- Only install pipes with smooth, even inner surfaces. If a flexible hose has to be used, ensure it is pulled tight to smooth out the ridges before fixing.
- Use ducting pipes with a diameter of at least 120mm, but ideally 150mm.
- Keep piping to a minimum use the most direct route to an external outlet.
 - Make sure that there is an adequate supply of fresh air to replace the air ducting out of the kitchen, i.e. windows that can be opened, doors to adjacent rooms, air bricks. Problems with installation may occur if points 1-7 are not observed.

EASY MOUNTING SYSTEM

Thanks to an easy wall-mounting system, selected hoods can be installed quickly and securely by one person. Rotating offset 'cam' fixings make it possible for positional adjustments of up to 6mm, helping to get the hood level and stable. (Not available on all our hoods.)

WORKTOP INSTALLATION



Mix and match your perfect hob

NEFF worktop ventilation solutions mean that the hood is installed behind the hob, meaning they are effective at extracting kitchen smells and steam right where you are cooking. Their ease of installation and extracted or recirculation options mean that they can also be placed flexibly throughout your kitchen, integrating into your work surface for a sleek look.



nstallatio

The NEFF Remote Motor Installation Mounting Kit (Z92IDM9X0) frees up space under the worktop and provides the option to mount the motor up to 3 metres away from the appliance.

lmage for illustrative purposes only Ducting not supplied.





COOKING FLEXIBILITY KNOWS NO LIMITS

The Downdraft hood faultlessly integrates into the kitchen design without any compromise, thanks to its space-saving, quiet, yet powerful, Inline motor installation option. The hood is complementary to our oven and hob matching design for an idyllic combination of performance and sophistication.



D95DAP8N0B









HOOD TYPE		DOWNDRAFT
MODEL		D95DAP8N0B
COLLECTION		N 90
Colour		Stainless Steel & Black Glass
SPECIAL FEATURES		Stanness Steer a Black Glass
Home Connect		
Adjustable LED white colour temperature		
Ambient light		
Climate control sensor		
Hob Hood control		
Efficient Drive		
Intensive setting / Automatic intensive revert ¹		•/•
Boost position (Angled & Flat Hoods)		-, -
NEFF Silence function		
Filter saturation indicator		•
FEATURES		
Suitable for ducted operation / recirculating		•/•
Electronic power level display		-, -
Power levels		3 + 2 Intensive
NEFF Fresh Air (Interval operation)		3 - 2
Automatic after running	minutes	10
Lighting		LED 7W strip
Softlight with dimmer function		
Number of metal grease filter cassettes		2
Type of control		Touch Control
OPTIONAL ACCESSORIES ²		rederi control
Long life recirculation kit (2 year regenerative)		792IDP9X0
Remote motor installation mounting kit		Z92IDM9X0
PERFORMANCE / TECHNICAL INFORMATION		
Appliance width	mm	918
Extraction Rate in m³/h³,4		
Power level 1 - ducted / recirculating		260 / 230
Power level 2 - ducted / recirculating		428 / 410
Power level 3 - ducted / recirculating		530 / 452
Intensive level 1 - ducted / recirculating		630 / 482
Intensive level 2 - ducted / recirculating		750 / 500
Noise level (sound power) based on dB(A) re 1 pW 3,5		
Power level 1 - ducted / recirculating		43 / 37
Power level 2 - ducted / recirculating		58 / 70
Power level 3 - ducted / recirculating		62 / 72
Intensive level 1 - ducted / recirculating		66 / 74
Intensive level 2 - ducted / recirculating		67 / 75
Pipe outlet diameter	mm	150
Minimum distance above an electric hob / gas hob ⁶	mm	
GB pluq		•
Energy Rating		A
THE RESERVE THE PROPERTY OF THE PARTY OF THE	10 TO 10 TO 10	THE RESERVE AND THE PERSON NAMED IN

CEILING INSTALLATION HOODS



The ideal space saving solution

Sleek, stylish and unobtrusive, our ceiling mounted hoods effectively extract steam and odours without taking up valuable kitchen space. Easy to use with a remote control, the grease filters can also simply be removed and cleaned in the dishwasher. Our Plug&Play recirculation only ceiling hoods are designed to complement the layout of your space and offer complete flexibility when designing your kitchen. With a high extraction rate, air is drawn in through a series of grease and charcoal filters and then recirculated back into the room without the need for ducting.





197CPS8W5B Flush with the ceiling, integrated	ceiling hood (900mm width)	N 90
WI-FI (C)		
Installation view		
VESIGN PERFORMANCE Width [cm] Lights Coorting AUTON CONTROL C	MATIC AIR PASCR	
	VISIT PAGE 78 FOR MORE INFORMATION ON OUR INSTALLATION	

HOOD TYPE	
MODEL	
COLLECTION	
Colour	
SPECIAL FEATURES	
Home Connect	
Adjustable LED white colour temperature	
Ambient light	
Climate control sensor	
Hob Hood control	
Reduced size motor	
Efficient Drive	
Intensive setting / Automatic intensive revert ¹	
Boost position (Angled & Flat Hoods)	
NEFF Silence function	
Filter saturation indicator	
FEATURES	
Suitable for ducted operation / recirculating	
Electronic power level display	
Power levels	
NEFF Fresh Air (Interval operation)	
Automatic after running	minutes
Lighting Softlight with dimmer function	
Number of metal grease filter cassettes	
Type of control	
OPTIONAL ACCESSORIES ²	
Recirculation filter kit	
CleanAir recirculating flat module (Stainless Steel))
CleanAir recirculating flat module (White)	
CleanAir plus recirculating module (Stainless Stee	l)
CleanAir plus recirculating module (White)	
Long life regenerative recirculation module (Stainles	ss Steel)
Long life regenerative recirculation module (White)	
PERFORMANCE / TECHNICAL INFORMATION	
Appliance width	mm
Extraction Rate in m ³ /h ^{3,4}	
Power level 1 ducted / recirculating	
Power level 2 ducted / recirculating	
Power level 3 ducted / recirculating	
Intensive level 1 ducted / recirculating	
Intensive level 2 ducted / recirculating	
Noise level (sound power) based on dB(A) re 1	pW 3,5
Power level 1 ducted / recirculating	
Power level 2 ducted / recirculating	
Power level 3 ducted / recirculating Intensive level 1 ducted / recirculating	
Intensive level 2 ducted / recirculating	
Pipe outlet diameter	mm
Minimum distance above an electric hob / gas hob ⁶	mm
	11111

	CEILING	CEILING	CEILING	CEILING FLAT MOTOR	CEILING	CEILING	CEILING COMPACT MOTOR	CEILING PLUG & PLAY
13	I97CPS8W5B	I25CBS8W0B	195CBS8W0B	194CAQ6N0B	195CAQ6N0B	195CAQ6W0B	I95CAP6N1B	I14RBQ8W0
1/2	N 90	N 70	N 70	N 50	N 50	N 50	N 50	N 70
1	White & White Glass	White & White Glass	White & White Glass	Stainless Steel	Stainless Steel	White	Stainless Steel	White & White Glass
3	•	•	•	•	•	•		•
3	•							
85 45								
4	•	•	•					
6	•	•	•	•	•	•		•
				Flat			Compact	
	•	•	•	•	•	•	•	•
	• / •	• / •	•/•	•/•	•/•	•/•	•/•	•/•
10	•	•	•	•	•	•		•
	•	•	•	•	•	•	·	•
	•/•	•/•	•/•	•/•	•/•	•/•	•/•	/●
2	·	·	,	,	·	,	·	· · · · · · · · · · · · · · · · · · ·
20	3 + 2 Intensive	3 + 2 Intensive	3 + 2 Intensive	3 + 1 Intensive	3 + 2 Intensive			
1	•	•	•	•	•	•	•	•
	10	10	10	10	10	10	10	10
	4 x LED lights	4 x LED lights	4 x LED lights	4 x LED lights	4 x LED strips			
20	•	•	•	•	•	•	•	•
18	2	2	2	2	2	2	2	3
85	Remote Control	Remote Control	Remote Control	Remote Control	Remote Control	Remote Control	Remote Control	Remote Control
7								Filters Included
				Z52JXC1N1			Z52JXC1N1	i liters liicidded
				Z52JXC1W1			Z52JXC1W1	
2	Z52JCC1N6	Z52JCC1N6	Z52JCC1N6		Z52JCC1N6	Z52JCC1N6		
8	Z52JCC1W6	Z52JCC1W6	Z52JCC1W6		Z52JCC1W6	Z52JCC1W6		
20	Z52JCD0N0	Z52JCD0N0	Z52JCD0N0		Z52JCD0N0	Z52JCD0N0		
8	Z52JCD0W0	Z52JCD0W0	Z52JCD0W0		Z52JCD0W0	Z52JCD0W0		
4	900	1200	900	900	900	900	900	1050
	265 / 197	265 / 200	265 / 200	252 / 198	265 / 200	265 / 200	190 / 167	/ 164
1	331 / 313	335 / 316	335 / 316	336 / 257	335 / 316	335 / 316	265 / 221	/ 322
	458 / 419	458 / 422	458 / 422	434 / 336	458 / 422	458 / 422	400 / 423	/ 409
	672 / 537	594 / 513	594 / 513	581 / 466	594 / 513	594 / 513		/ 502
機	933 / 637	798 / 565	798 / 565	734 / 574	798 / 565	798 / 565	690 / 588	/ 580
	41 / 47	41 / 46	41 / 46	47 / 48	41 / 46	41 / 46	48 / 50	/ 43
88	47 / 56	47 / 57	47 / 57	55 / 55	47 / 57	47 / 57	55 / 58	/62
	56 / 63	56 / 63	56 / 63	61 / 61	56 / 63	56 / 63	65 / 69	/ 68
	64/68	62 / 67	62 / 67	68 / 71	62 / 67	62 / 67		/ 73
	70 / 72	68 / 69	68 / 69	72 / 74	68 / 69	68 / 69	73 / 74	/ 76
	150	150	150	150	150	150	150	(50/650
2	650 / 650	650 / 650	650 / 650	650 / 650 •	650 / 650	650 / 650	650 / 900	650 / 650
100	A	A	• A	A	A	• A	• B	
att.	А	A	A	A	A	A	D	

Power automatically reverts back to normal setting after intensive. 3A type of recirculating kit is required if recirculating. 3Air Flow and noise declarations made in line with CECED Code of Conduct.

Measured according to EN61591 on largest pipe diameter. 5From top of pan supports. Depending on the model,





The ideal solution for contemporary kitchens

Our island hoods are a stunning way to showcase a central cooking and preparation space. Available with stylish flat glass and box designs, the range is designed to complement our gas, ceramic and induction hobs. With height adjustable chimney sections, there are options to suit all ceiling heights too.





with display

DESIGN PERFORMANCE














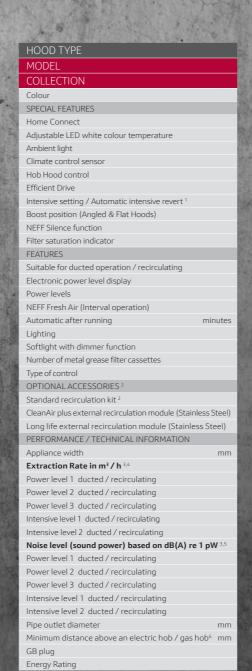



No. of the second second	化品面 化二十二十二十二十二十二十二十二十二十二十二十二十二十二十二十二十二十二十二十	
ISLAND	ISLAND	ISLAND
196BMV5N5B	196BMP5N0B	195GBE2N0B
N 90	N 70	N 50
Stainless Steel	Stainless Steel	Stainless Steel & Glass
•		
•		
•		
•		
•	•	
●/●	●/●	●/●
•	•	
•	•	
●/●	●/●	●/●
•	•	
3 + 2 Intensive	3 + 2 Intensive	3 + 1 Intensive
•	•	
10	10	
4 x LED lights	4 x LED lights	4 x LED lights
•	•	
3	3	2
Touch Control	Touch Control	Soft Touch
75106VF	7F10CVF	75105V5
Z5106X5 Z52CXC2N6	Z5106X5 Z52CXC2N6	Z5105X5 Z52CXC1N6
Z52CACZNO Z52CBD2X1	Z52CKZNO Z52CBD2X1	ZSZCACTNO
ZSZCBDZAT	ZSZCBDZAT	
900	900	900
300	500	300
281 / 171	281 / 171	243 / 173
361 / 266	361 / 266	328 / 253
445 / 313	445 / 313	429 / 315
657 / 364	657 / 364	732 / 384
867 / 391	867 / 391	
44/59	44 / 59	47 / 62
49 / 68	49 / 68	54 / 69
54/71	54 / 71	60 / 73
63 / 73	63 / 73	71 / 77
69 / 74	69 / 74	
150 / 120	150 / 120	150 / 120
550 / 650	550 / 650	550 / 650
•	•	•
Δ	Δ+	В

WALL INSTALLATION HOODS



The focal point of any kitchen

Hoods installed on the wall can be used to create a design feature in themselves, adding a focal point to your kitchen while offering powerful extraction for all types of cooking. Choose from a range of styles to suit your kitchen design, including the new Creative Slim hoods or Angled Glass hoods with features such as Ambient Light that let you express yourself with colour, as well as your cooking. And if choosing to install in recirculation, the hood can be fitted without a chimney piece for a sleeker finish to your hood installation.

D96IKW1S0B

Premium Angled Chimney Hood (900mm width)

N 90







DESIGN PERFORMANCE

















HOOD TYPE	A CONTRACTOR AND A CONT
MODEL	

SPECIAL FEATURES

Adjustable LED white colour temperature Ambient light

Climate control se

Efficient Drive

Boost position (Angled & Flat Hoods) NEFF Silence function

Filter saturation indicator FEATURES Suitable for ducted operation / recirculating

Electronic power level display NEFF Fresh Air (Interval operation

Automatic after running

Softlight with dimmer function Number of metal grease filter cassettes

Type of control OPTIONAL ACCESSORIES

Standard recirculation kit (chimless installation)

CleanAir Plus Anti-Pollen Recirculation Kit CleanAir Plus Anti-Pollen Recirculation Kit (Chimless

Long life regenerative recirculation kit Long life regenerative integrated recirculation kit

Black chimney PERFORMANCE / TECHNICAL INFORMATION

Extraction Rate in m³/h³/

Power level 1 ducted / recirculating Power level 2 ducted / recirculating Power level 3 ducted / recirculating

ntensive level 2 ducted / recirculating

Noise level (sound power) based on dB(A) re 1 pW 3

Power level 3 ducted / recirculating Intensive level 1 ducted / recirculating

Pipe outlet diameter Minimum distance above an electric hob / gas hob6 mm GB plug





	ANGLED	ANG	GLED	ANO	GLED		GLED	
	D96IKW1S0B	D95IH	IM1S2B	D95IH	D95IHM1S0B		E1S0B	
		D65IH	IM1S2B		M1S0B	D65IEE1S0B N 30		
90	N 90		50		50			
36	Black glass	Black glass with black Chinmey			glass	Stainless stee	el & black glass	
25								
88	•							
25								
19	•							
88	•							
86	•							
	•/•	•	/●	•	/●	•	/●	
38	•							
8	•							
88	<u> </u>							
8	•/•	•	/●	•	/●	•	/●	
	•		, -		, -		, -	
8	3 + 2 Intensive	3 + 1 lr	ntensive	3 + 1 lr	itensive	3 + 1 lr	ntensive	
33	•							
	10	2 15	D.II. I.	2 15	D. I	2 15	D. I. I.	
88	2 x LED lights	2 x LE	D lights	2 x LED lights		2 x LED lights		
9	2		2	2		2		
8	Touch Control		Control	Touch Control			Control	
38								
8						Z51E	IU1X1	
8	7514111/6	751	NII 1 V.C	7517	113.77			
8	Z51AII1X6		All1X6		All1X6			
8	Z51AIV1X6		JV1X6		IV1X6			
題	Z51AIS0X0	Z51A	IS0X0	Z51A	IS0X0	7545	V40V0	
8						Z51F	XJ0X0	
8	Z51AIR0X0	Z51A	IR0X0	Z51A	IR0X0			
20	Z91AXE1S1	Z91A	XE1S1	Z91A	XE1S1			
88	000	000	500	000	500	000	600	
28 -	890	890	590	890	590	800	600	
86	293 / 191	253 / 218	253 / 218	253 / 218	253 / 218	245 / 189	245 / 189	
8	342 / 317	332 / 293	332 / 293	332 / 293	332 / 293	320 / 260	320 / 260	
	467 / 430	416/388	416/388	416 / 388	416 / 388	399 / 320	399 / 320	
8	612 / 525	700 / 557	700 / 557	700 / 557	700 / 557	669 / 398	669/398	
8	837 / 583							
器	43 / 50	48 / 55	48/55	48/55	48 / 55	48 / 58	48/58	
100	47 / 60	53/60	53/60	53 / 60	53 / 60	55 / 65	55 / 65	
	55 / 67	58/66	58/66	58 / 66	58 / 66	60 / 69	60 / 69	
9	61 / 72	67 / 75	67 / 75	67 / 75	67 / 75	69 / 76	69 / 76	
	67 / 75							
100	150 / 120	150/120	150/120	150 / 120	150 / 120	150 / 120	150 / 120	
12	450 / 600 •	450 / 600	450/600	450 / 600	450 / 600	450 / 600	450 / 600	
	Ф А+		• В		В		● B	
A DE	THE COUNTY OF THE PARTY OF			STATE OF THE PARTY	CHICAGO CONTRA			

WALL INSTALLATION HOODS



A kitchen to create in

Why choose between style and effectiveness when you can have both? Our Creative Slim hood illuminates your space in ambient lighting while keeping the room free from steam and odours. With a climate controlled automatic system, your ventilation is tailored to your cooking as soon as you turn the hob on – ideal when you need your hands free.





DESIGN PERFORMANCE






THE RESERVE OF THE PARTY OF THE	◆90
HOOD TYPE	CREATIVE SLIM
MODEL	D95FRM1S0B
COLLECTION	N 70
Colour	Creative Black Glass
SPECIAL FEATURES	Creative block class
Home Connect	
Adjustable LED white colour temperature	
Ambient light	
Climate control sensor	
Hob Hood control	
Efficient Drive	•
ntensive setting / Automatic intensive revert ¹	•/•
Boost position (Angled & Flat Hoods)	•
NEFF Silence function	
Filter saturation indicator	
FEATURES	
Suitable for ducted operation / recirculating	•/•
Electronic power level display	
Power levels	3 + 1 Intensive
NEFF Fresh Air (Interval operation)	
	nutes
Lighting	2 x LED lights
Softlight with dimmer function	
Number of metal grease filter cassettes	2
Type of control	Touch Control
OPTIONAL ACCESSORIES ²	Todali considi
Standard recirculation kit	
Standard recirculation kit (chimless installation)	
CleanAir Plus Anti-Pollen Recirculation Kit	Z51AII1X6
CleanAir Plus Anti-Pollen Recirculation Kit (Chimless Installation)	Z51AIV1X6
Long life regenerative recirculation kit	Z51AFS0X0
ong Life Regenerative Recirculation Kit (Chimless Installation)	Z51AFROXO
Black chimney	Z91AXE1S1
PERFORMANCE / TECHNICAL INFORMATION	25 11 0 12 13 1
Appliance width	mm 890
Extraction Rate in m ³ /h ^{3,4}	
Power level 1 - ducted / recirculating	231 / 125
Power level 2 - ducted / recirculating	331 / 214
Power level 3 - ducted / recirculating	404 / 288
ntensive level 1 - ducted / recirculating	739 / 510
ntensive level 2 - ducted / recirculating	
Noise level (sound power) based on dB(A) re 1 pW 3,5	
Power level 1 - ducted / recirculating	44 / 48
Power level 2 - ducted / recirculating	53 / 58
Power level 3 - ducted / recirculating	58 / 63
ntensive level 1 - ducted / recirculating	71 / 73
ntensive level 2 - ducted / recirculating	71773
Pipe outlet diameter	mm 150/120
Minimum distance above an electric hob / gas hob ⁶	mm 450 / Not suitable
GB plug	•
Energy Rating	A

Power automatically reverts back to normal setting after intensive. ²A type of recirculating kit is required if recirculating. ³Air Flow and noise declarations made in line with CECED Code of Conduct ⁴Measured according to EN61591 on largest pipe diameter. ⁵From top of pan supports. Depending on the model, ⁴Points the state of the following store. ⁵Points the state of the following store. ⁵Points and the following store of the following store. ⁵Points and the following store of the following store. ⁵Points and the following store of the following s

GLASS CHIMNEY HOODS









90 CM MODEL	
60CM MODEL	
COLLECTION	
Colour	
SPECIAL FEATURES	
Home Connect	
Adjustable LED white colour temperature	
Ambient light	
Climate control sensor	
Hob Hood control	
Efficient Drive	
Intensive setting / Automatic intensive revert ¹	
Boost position (Angled & Flat Hoods)	
NEFF Silence function	
Filter saturation indicator	
FEATURES	
Suitable for ducted operation / recirculating	
Electronic power level display	
Power levels	
NEFF Fresh Air (Interval operation)	
Automatic after running	minute
Lighting	
Softlight with dimmer function	
Number of metal grease filter cassettes	
Type of control	
OPTIONAL ACCESSORIES ²	
Standard recirculation kit	
CleanAir plus external recirculation module (Stain	iless Steel
CleanAir plus integrated recirculation kit	
Long life regenerative integrated recirculation k	it
PERFORMANCE / TECHNICAL INFORMATION	
Appliance width	mn
Extraction rate in m³/h ³,4	
Power level 1 - ducted / recirculating	
Power level 2 - ducted / recirculating	
Power level 3 - ducted / recirculating	
Intensive level 1 - ducted / recirculating	
Intensive level 2 - ducted / recirculating	o 1 pw 35
Noise level (sound power) based on db(a) re Power level 1 - ducted / recirculating	e i þw 🦠
Power level 2 - ducted / recirculating	
Power level 3 - ducted / recirculating	
Intensive level 1 - ducted / recirculating	
Intensive level 2 - ducted / recirculating	
Pipe outlet diameter	mm bob6 ma
Minimum distance above an electric hob / gas	1100- 11111
Gb plug	
Energy rating	




CURVED GLASS		CURVE	ED GLASS	STRAIGH	HT GLASS
D94AFM1N0B		D94ABC0N0B		D94GE	CONOB
D64AFM1N0B		D64ABC0N0B		D64GBC0N0B	
N S			130	N	
	Stainless Steel & Glass		Steel & Glass		teel & Glass
• /	•				
• /	•		•/•		/●
-	•	`	·/ •		, •
3 + 1 Int	tensive		3		3
2 x LED	lights	2 x LI	ED lights	2 x LEI) lights
	1	2	1	2	1
2 Touch (Buttons		1 Buttons
Touch Control		1 4311	Duttons	Tusii L	attoris
Z51DX	U0X0	Z51DXU0X0		Z51DXU0X0	
Z51FX	C1N6	Z51FXC1N6		Z51FXC1N6	
Z51D>	(I1X6	Z51DXI1X6		Z51DXI1X6	
Z51FX	KJOXO	Z51FXJ0X0		Z51FXJ0X0	
000		000		200	4600
900 /	600	900	0/600	900	/ 600
234 / 164	239 / 173	241 / 163	241 / 172	261 / 181	266 / 192
303 / 236	306 / 250	309 / 234	309 / 245	326 / 252	330 / 260
371 / 292	400 / 303	612 / 351	612 / 365	650 / 361	649 / 365
610 / 355	615 / 361				
10.150	10.750	10.100	16.160	10.100	E1./60
48 / 60 55 / 68	48 / 59 54 / 67	48 / 60 54 / 68	46 / 60 53 / 67	48 / 60 55 / 67	51 / 60 57 / 67
61 / 72	59 / 71	69 / 75	68 / 75	69 / 76	70 / 75
69 / 75	69 / 75	657.75	007.73	637,76	70773
150 /	120	150	0 / 120	150	/ 120
550 /	650	550	0 / 650	550 / 650	
•			•		•
В			В		4

¹Power automatically reverts back to normal setting after intensive. ²A type of recirculating kit is required if recirculating. ³Air Flow and noise declarations made in line with CECED Code of Condu ⁴Measured according to EN61591 on largest pipe diameter. ⁵From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Chargoal filter flexible hose a right of the following items: Chargoal filter flexible hose are full controlled in the conductions.

DESIGN PERFORMANCE

BOX CHIMNEY HOODS



It's amazing when a steak is sizzling in your pan, and the smell is part of an exciting cooking experience. But there are some kitchen odours nobody is too fond of. Enter our quiet but powerful Box Chimney Hoods where fresh air is guaranteed.

D96BMV5N5B

Box Chimney Hood (900mm width) N 90



Hob Hood Control





















CHANGE SETTINGS WITH EASE AND MAKE CLEANING A BREEZE WITH TOUCH CONTROL


D95BMP5N0B

Box Chimney Hood (900mm width) N 70



HOOD TYPE

90 CM MODEL	
60CM MODEL	
COLLECTION	
Colour	
SPECIAL FEATURES	
Home Connect	
Adjustable LED white colour temperature	
Ambient light	
Climate control sensor	
Hob Hood control	
Efficient Drive	
Intensive setting / Automatic intensive revert ¹	
Boost position (Angled & Flat Hoods)	
NEFF Silence function	
Filter saturation indicator	
FEATURES	
Suitable for ducted operation/recirculating	
Electronic power level display	
Power levels	
NEFF Fresh Air (Interval operation)	
Automatic after running m	inutes
Lighting	
Softlight with dimmer function	
Number of metal grease filter cassettes	
Type of control	
OPTIONAL ACCESSORIES ²	
Standard recirculation kit	
CleanAir plus external recirculation module (Stainless	Steel)
CleanAir plus integrated recirculation kit	
Long life regenerative integrated recirculation kit	
PERFORMANCE / TECHNICAL INFORMATION	
Appliance width	mm
Extraction Rate in m³/h 3,4	
Power level 1 ducted / recirculating	
Power level 2 ducted / recirculating	
Power level 3 ducted / recirculating	
Intensive level 1 ducted / recirculating	
Intensive level 2 ducted / recirculating	
Noise level (sound power) based on dB(A) re 1	pW ^{3,5}
Power level 1 ducted / recirculating	
Power level 2 ducted / recirculating	
Power level 3 ducted / recirculating	
Intensive level 1 ducted / recirculating	
Intensive level 2 ducted / recirculating	
Pipe outlet diameter	mm
Minimum distance above an electric hob / gas hob	o ⁶ mm
GB plug	
Energy Rating	

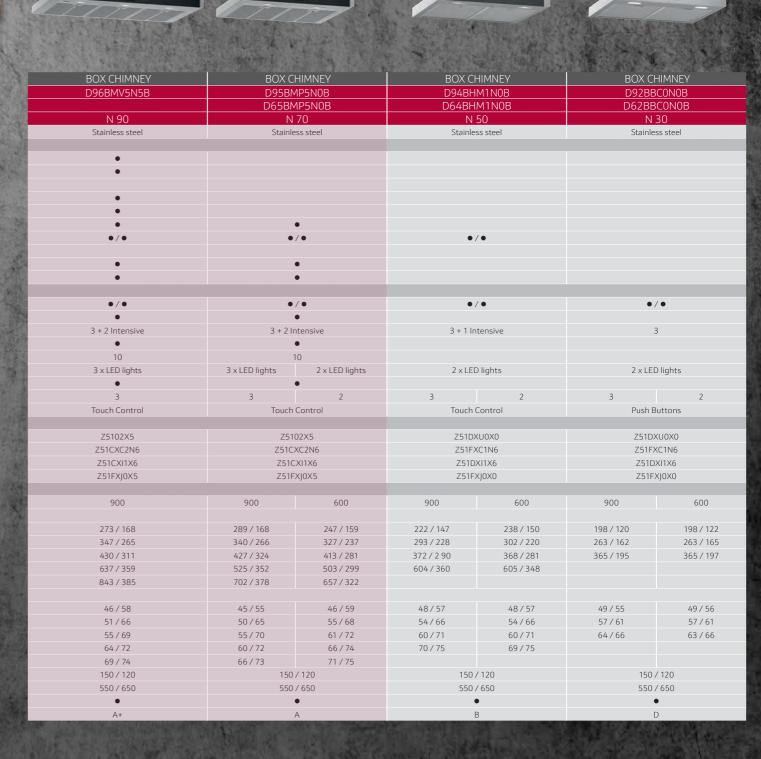

PYRAMID CHIMNEY HOODS




Classic and striking designs for modern kitchens

Stop the smell, not the conversation. For us, cooking is all about enjoying tasty food with family and friends. That's why our quiet Pyramid Chimney Hoods ensure nothing gets in the way of conversation.

D94QFM1N0B

D92PBC0N0B

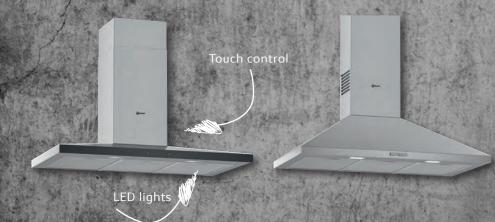

DESIGN PERFORMANCE





DESIGN PERFORMANCE











STRIKING DESIGN FOR MODERN KITCHENS



	· 大学中国的特别的
g	HOOD TYPE
8	90CM MODEL
8	75CM MODEL
8	60CM MODEL
8	COLLECTION
8	Colour
8	SPECIAL FEATURES
8	Home Connect
	Adjustable LED white colour temperature
	Ambient light
	Climate control sensor
9	Hob Hood control
g	Efficient Drive
8	Intensive setting / Automatic intensive revert ¹
8	Boost position (Angled & Flat Hoods)
8	NEFF Silence function
8	Filter saturation indicator
a	FEATURES
	Suitable for ducted operation / recirculating
8	Electronic power level display
2	Power levels
ä	NEFF Fresh Air (Interval operation)
8	Automatic after running minutes Lighting
8	Softlight with dimmer function
8	Number of metal grease filter cassettes
8	Type of control
B.	OPTIONAL ACCESSORIES ²
8	Standard recirculation kit
8	CleanAir plus external recirculation module (Stainless Steel)
ā	CleanAir plus integrated recirculation kit
ø	Long life regenerative integrated recirculation kit
8	PERFORMANCE / TECHNICAL INFORMATION
Ø	Appliance width mm
8	Extraction Rate in m³/h 3,4
8	Power level 1 ducted / recirculating
8	Power level 2 ducted / recirculating
ı	Power level 3 ducted / recirculating
ı	Intensive level 1 ducted / recirculating
	Intensive level 2 ducted / recirculating
	Noise level (sound power) based on dB(A) re 1 pW ^{3,5}
ı	Power level 1 ducted / recirculating
•	Power level 2 ducted / recirculating
	Power level 3 ducted / recirculating
	Intensive level 1 ducted / recirculating
	Intensive level 2 ducted / recirculating
3	Pipe outlet diameter mm
	Minimum distance above an electric hob / gas hob ⁶ mm



SLIM PYRAMID		SLIM F		PYRAMID CHIMNEY			
D94QFM1N0B		D92QBC0N0B			D92PBC0N0B		
					D72PBC0N0B		
D64QF		D62QBC0N0B			D62PBC0N0B		
N :	50		30		N 30		
Stainless steel		Stainle	ess steel		Stainless steel		
• /	·						
-	•						
• /	′ •	•	/●		•/•		
3 + 1 In	tensive		3		3		
2 x LEC	lights	2 x LED lights 2 x LED lights		2 x LED lights			
3 /		3/2			2		
Touch (h Control Push Buttons			Push Buttons			
75100	71000	7515	VIIOVO		7F120VF		
Z51DX Z51FX			XU0X0		Z5138X5		
Z51D)		Z51FXC1N6 Z51DX11X6					
Z51F)		Z51FXJ0X0					
23117	1,07.0	2511	7,07.0				
900	600	900	600	900	750	600	
247 / 171	258 / 181	198 / 125	198 / 118	198 / 129	198 / 129	198 / 127	
316 / 248	328 / 257	263 / 168	263 / 162	263 / 174	263 / 174	263 / 171	
389 / 308	410/312	365 / 202	365 / 198	365 / 213	365 / 213	365 / 211	
642 / 372	644 / 372						
48 / 58	50 / 60	50 / 55	50 / 55	50 / 56	50 / 56	50 / 55	
55 / 66	56 / 68	59 / 62	58 / 61	57 / 62	57 / 62	58 / 62	
61 / 71	62 / 72	64/66	64 / 65	65 / 67	65 / 67	66 / 67	
70 / 75	70 / 75						
150	(120	150	/120		150 / 120		
150 / 550 /			/ 120 / 650		150 / 120 550 / 650		
550 /		550	•		550 / 650		
<i>A</i>			D		D		
CONTRACTOR OF STREET	AND DESCRIPTION OF THE PERSON	OF THE OWNER, SANSON	MATERIAL SCHOOL SERVICE STATE OF	THE RESERVE OF THE PERSON NAMED IN		TOTAL STATE	

TELESCOPIC HOODS



Always the right height

When you're cooking up a sumptuous meal, chances are, you're more focussed on what's inside the pots than what escapes them. Our telescopic hoods are well-trained in coping with steam and odours. They slide out when you need them, and can be pushed back, for a flush finish when you don't. With a lowering frame, the hood can disappear entirely from view. This compact, discreet set-up with subtle LED lighting has up to four highly capable speed settings. Any noise can be toned down further on demand with the Silence function, so nothing can spoil the kitchen conversation.

DESIGN PERFORMANCE

Simply push under the

hood to lower into

front of the

position.

VITAL SPACE-SAVING VENTILATION SOLUTION

Providing the ultimate space-saving solution, our first hidden hood beautifully complements flush, integrated kitchen designs. 350mm minimum cabinet depth required.

D49ML54N1B

Telescopic Hood (900mm width) N 70

DESIGN PERFORMANCE

The hood remains

completely hidden until

The telescopic hood

easily extends on the

smooth rails.

you're ready to start



Appliance width (mm)

Ambient light

Efficient Drive

Filter saturation indicator

FEATURES

Suitable for ducted operation / recirculating

NEFF Fresh Air (Interval operation

Softlight with dimmer function

Type of control

Long life regenerative recirculation kit

Bracket for installation in 90cm wide units

Ducted power level 2 / recirculating power level 2

ntensive level 2 - ducted / recirculating

Noise level (sound power) based on dB(A) re 1 pW 3

Ducted power level 2 / recirculating power level 2

Intensive level 1 - ducted / recirculating

Ducted intensive / recirculating intensive

GB plug





Colour

SPECIAL FEATURES

Adjustable LED white colour temperature

Hob Hood control

Intensive setting / Automatic intensive revert

Furniture door required

Electronic power level display

Number of metal grease filter cassettes OPTIONAL ACCESSORIES 2

Standard recirculation kit

Handle Strip - black & steel design

PERFORMANCE / TECHNICAL INFORMATION


Extraction Rate in m3/h 3/


Ducted power level 1 / recirculating power level 1

Ducted power level 3 / recirculating power level 3

ucted power level 1 / recirculating power level 1 Ducted power level 3 / recirculating power level 3

Pipe outlet diameter Minimum distance above an electric hob / gas hob⁶ mm

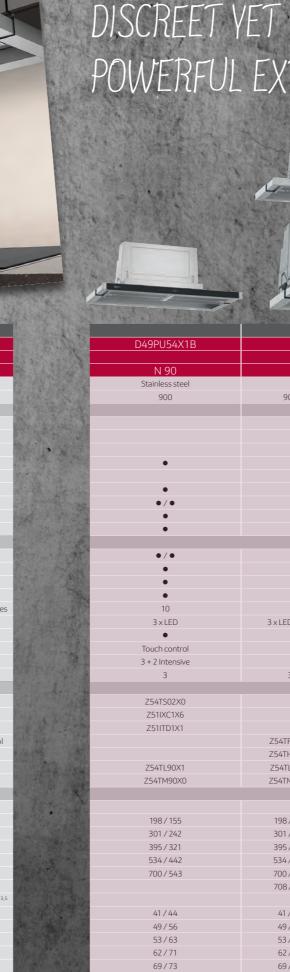

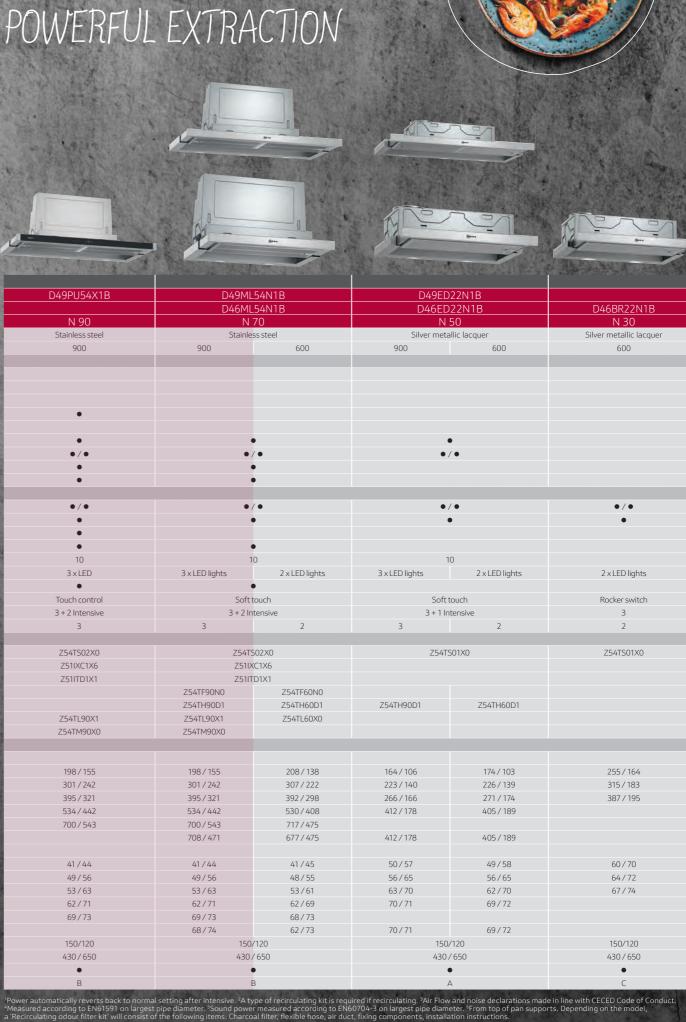

CANOPY HOODS



Room for inspiration

A great kitchen atmosphere is not just about the people you've invited or the meal you're cooking. A clear view to focus on your creations is a must, too. Our space-saving canopy hoods cleanse the air skilfully and quietly – allowing everyone to join the conversation. Another helpful idea: the metal filter cassettes are easily removable and dishwasher-safe.

D94XAF8N0B

Canopy Hood (900mm width)

N 70



DESIGN PERFORMANCE







The N70 canopy hoods come in full 90cm and 60cm widths and are easy to install due to replacing the bottom of the cabinet. Thanks to their design, they make even more space for storage in your kitchen.

Additional accessories for a sleek look inside the cabinet: Z51IBN0N0 - Chimney extension 185-362mm Z51IBG0N0 - Chimney extension 120mm

TANK TANK TANK TANK TANK TANK TANK TANK
HOOD TYPE
WIDE MODEL
STANDARD MODEL
COLLECTION
Colour
SPECIAL FEATURES
Homo Connect

Adjustable LED white colour temperature Ambient light Climate control sensor Hob Hood control Intensive setting / Automatic intensive revert NEFF Silence function Filter saturation indicator FEATURES Suitable for ducted operation / recirculating Furniture door required Electronic power level display NEFF Fresh Air (Interval operation) Lighting Softlight with dimmer function Type of control Number of metal grease filter cassettes OPTIONAL ACCESSORIES ² Standard recirculation filter / kit CleanAir plus anti-pollen recirculation kit Long life regenerative recirculation kit

PERFORMANCE / TECHNICAL INFORMATION

Appliance width mm

Extraction Rate in m³/h³.4

Ducted power level 1 / recirculating power level 1

Ducted power level 2 / recirculating power level 2

Ducted power level 3 / recirculating power level 3

Noise level (sound power) based on dB(A) re 1 pW ^{3,5}

Ducted power level 1 / recirculating power level 1

Ducted power level 2 / recirculating power level 2

Ducted power level 3 / recirculating power level 3

Ducted intensive / recirculating intensive

Pipe outlet diameter mm

Minimum distance above an electric hob / gas hob⁶ mm

Minimum distance above an electric hob / gas hob⁶ mm GB plug



	CANOPY	CAN	NOPY	CAN	IOPY	CAN	NOPY	CANOPY	
8	D57ML67N1B	D94XA	F8N0B	D57MH	156N0B	D585!	5X1GB		
8		D64XA	F8N0B	D55MH	156N0B	D565!	5X1GB	D51NAA1C0B	
8	N 90	•	70	N			30	N 30	
8	Stainless Steel and Black Glass		and Clear Glass		ss steel		allic lacquer	Silver Metallic Lacquer	
88									
88									
8									
8									
8									
8									
8	•/•			• ,	/ ●	•)/		
8									
闘	•								
88									
8	• / •	•,	/ •	• ,	/ ●	•,	/ •	•/•	
闘									
鰀									
題	30								
8	2 x LED lights	2 × LEI	Olights	2 × LEI) lights	2 × LEI	Olights	2 x LED lights	
9	•								
8	Soft Touch		switch	Soft 7			switch	Slider switch	
88	3 + 1 Intensive		3	3 + 1 In			ntensive	3	
8	2	2	1	2	1		2	1	
88	Z5135X3	751IF	BU0X0	Z513	35X3	751	55X0	Z51INT0X0	
8	Z51IXC1X6		(C1X6	Z51IX					
88	Z51ITD1X1	Z51IT	D1X1	Z51IT	D1X1				
副									
驅	700	894	594	700	520	730	530	530	
80	210 (170	220 / 210	220 / 210	2/5/210	220 / 200	100 / 100	106 (10)	120 / 110	
88	210 / 170 380 / 250	230 / 210 360 / 330	230 / 210 335 / 330	345 / 210 540 / 270	330 / 200 500 / 250	198 / 139 287 / 206	196 / 134 280 / 198	130 / 110 160 / 160	
8	575 / 310	610 / 440	610 / 440	630 / 300	575 / 280	379 / 278	362 / 268	302 / 300	
8	775 / 380	0.07 1.0	0.07.1.0	730 / 310	650 / 290	638 / 408	618 / 395	3027 300	
8									
	46 / 57	49 / 60	49 / 60	53 / 69	53 / 67	38 / 49	38 / 49	46 / 49	
	55 / 66	56 / 69	56 / 69	63 / 71	64 / 71	49 / 58	49 / 58	50 / 53	
100	64/71	70 / 75	70 / 75	66 / 73	67 / 73	56 / 65	56/64	62 / 65	
	70 / 75	4.50	/120	69 / 74	70 / 74	68 / 72	68 / 72	120	
	150 / 120 500 / 650		/ 120 / 500		/ 120 / 650		/ 120 / 650	120 550 / 650	
	500 / 650	500	•	500	050	650	030	550 / 650	
100	•		В		2		c	D	

INTEGRATED HOODS



Great for masking smells


When all your friends sit around the table, just waiting for one of your treats to be served, you don't want steam or smoke disturbing the atmosphere. Our discreet integrated hoods work with three speeds to cleanse the kitchen air. While they do their job with a minimum of noise, LED lights shine a warm light on your bubbling pots and pans. Fitted between two kitchen cabinets, they hide behind a furniture door when you've finished cooking.

D64MAC1X0B



GREAT FOR ALL KITCHENS



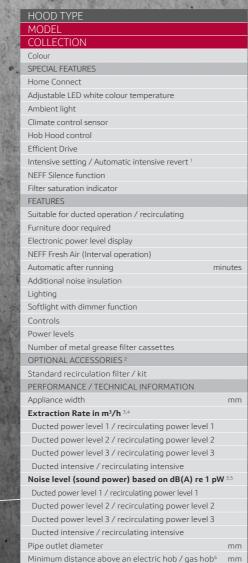



INTEGRATED	INTEGRATED
D64MAC1X0B	D61MAC1X0B
N 30	N 30
Silver metallic lacquer	Silver metallic lacquer
•/•	•/•
•	•
2 x LED lights	2 x LED lights
Push buttons	Push buttons
3	3
2	2
Z51IMA0X0	Z51IMA0X0
599	599
	2/2/22
256 / 208	240 / 224
352 / 320	288 / 256
625 / 416	368 / 272
10 /57	52./6/
49 / 57	52 / 64
56 / 68	56 / 67
70 / 75	62 / 68
150 / 120	150 / 120
150 / 120	150 / 120
500 / 650	500 / 650
• В	•
R	D




DESIGN PERFORMANCE









HOME CONNECT

IS COMPATIBLE WITH AMAZON ALEXA AND GOOGLE ASSISTANT

BEHIND THE DOOR ...

Control of the second of the s

Whether it's washing dishes, lightening the laundry load or keeping your food as fresh as possible, NEFF have everything to make life easier. NEFF's integrated appliances do all the hard work behind the door so you don't have to. Working tirelessly and quietly in the background, you can enjoy getting creative in the kitchen with friends and family... carefree.

COOLING

We have a range of fridges and freezers so there is something for everyone. Whether it is a large American-style fridge freezer, or a built-in fridge freezer, we're confident that there is a model to suit. Fresh Safe – Keep ingredients fresher for longer. Herbs, fruits and vegetables stay crisp, vibrant and fresh retaining vital nutrients and vitamins and locking in flavour.

LAUNDRY

For more information on cooling installation options visit neff-home.com/uk/

Baskets in dishwasher for illustrative purposes only – please see product specification for latest information

DISHWASHING

A NEFF dishwasher is designed with creative cooks in mind. That means that even the most bubbled-over oven dishes, baked-on ramekins and caramelised grill pans will still come out beautifully clean.

Chef 70° – Extra cleaning power for creative cooks. With a hotter setting and a powerful spray, the Chef 70° programme is perfect for cleaning even the dirtiest pots, pans and cooking utensils. Items placed in the lower basket are subject to higher spray pressure, eliminating the need for soaking and effectively removing even the most stubborn areas.

For more information on dishwasher features visit neff-home.com/uk/



Our 3 types of models cover all your laundry needs: washing machines, washer dryer combination models and tumble dryers.

Time Light -The NEFF laundry range quietly washes, allowing you to multi-task while entertaining guests. The clever Time Light projects the remaining wash cycle onto your floor with no need to open the door to check on progress. Allowing you to keep one eye on your wash as well as your guests.

FRESH SAFE

REFRIGERATION

Leading the way in food storage to ensure the freshest and tastiest food

We're constantly working to improve our range of fridges and freezers so there's something for everyone. Whether it's a large American-style fridge freezer that can cope with the demands of a hungry family, or a fridge freezer that integrates seamlessly into the kitchen furniture, we're confident that there's a model to suit.

THE COLLECTION

Choosing the right appliance to complement your kitchen and lifestyle can be challenging. To help you select the perfect kitchen compai introduced easy-to-follow Collections based on produ features, technology, design and simplicity. There's Collection to suit everyone

N 90

FEATURES

THIS COLLECTION CAN INCLUDE*:

Fresh Safe 3

No Frost

Vario Shelf

Wire Flex shelf

Easy Access Shelf

Easy Lift Shelf

Flevi Rail Drawers

Electronic 7 segment control

Energy Rating: E or F

Fresh Sense

Soft Close/Fixed Hinge

LED Light Super Freeze

Big Box

N 70

FEATURES

THIS COLLECTION CAN INCLUDE*:

No Frost/Low Frost

Vario Shelf

Easy Access Shelf

Electronic 7 segment control

Energy Rating: E or F

Super Cool

Fresh Sense

Fixed Hinge

LED Light

Super Freeze

Big Box

Wine Cabinets

N 50

FEATURES

THIS COLLECTION CAN INCLUDE*:

Fresh Safe

No Frost or Low Frost

Electronic Control

Energy Rating: E or F

Super Cool Fixed or Sliding Hinge

LED Light or Daylight

Super Freeze

Big box

N 30

FEATURES

THIS COLLECTION CAN INCLUDE*:

Vegetable drawer

Manual Defrost

Energy Rating: F Sliding Hinge

Interior Light



COOL SOLUTIONS FOR EVERY COOK

Combination and layout solutions for installing your cooling appliances

With so many kitchen styles to choose from, at NEFF we've catered for all spaces and lifestyles. With the option to build a cooling solution to your requirements, our installation options are designed to offer the ultimate flexibility. From side-by-side fridge and freezer installations to over-under stacked installations, it's easy to incorporate NEFF appliances into your overall kitchen design.

190 cm

OVER/UNDER INSTALLATION:

160cm

M) 88


72 cm

FREEZEF

Our over-under installation options are perfectly tailored to suit every Cookaholic's lifestyle. Conveniently 'stack' your fridge and freezer and ensure your cooling space reflects how you like to cook. For those who tend to shop little and often, a smaller capacity fridge & freezer doesn't need to impact on your space. Equally, if family life makes ample freezer space essential, an equal height '50/50' fridge freezer combination provides the perfect solution.

174 cm.





NEW ACCESSIBLE HEIGHTS


,194 cm

122 CM

SIDE-BY-SIDE INSTALLATION:

Our single door fridges and freezers are designed to sit parallel to one another in order to create a double door effect. By placing a left-hinged fridge and a right-hinged freezer (or vice versa) side by side you can easily browse fresh and frozen ingredients before getting creative in the kitchen. Smooth door opening is facilitated by a simple fixed or sliding hinge. Equally if you want to place a fridge in the kitchen and a freezer in the utility room, our appliances can be installed in a way which suits you.

. 176 cm

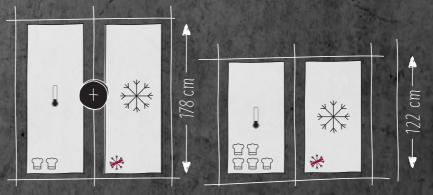



ures included in each collection are an overview only. Please ensure that you check the product detail for exact

A STYLE FOR ALL FOOD LOVERS

Leading the way in food storage to ensure the freshest and tastiest food

Fresh, seasonal ingredients are a staple in any NEFF kitchen. That's why the right food storage is so important: all our models – whether it's a large American-style fridge freezer that can cope with the demands of a hungry family, or a side-by-side fridge freezer that integrates seamlessly into the kitchen furniture – give you the flexibility to keep your fruit, vegetables and herbs crisp and vibrant for longer.



BUILT-IN FRIDGE/FREEZER

Designed to fit in a single housing unit, our range of fridge freezers include models from the tall larder style to more compact styles. All of our fridge freezers have a 4 star rating.

KI6873FE0G

E



AMERICAN-STYLE FRIDGE FREEZER

It's big, bold, and there's enough space for even the largest family's chilled and frozen food. You'll also find an ice and water dispenser to keep you cool all year round.

American-style fridge freezer N 70





BUILT-UNDER FRIDGE AND FREEZER

Our integrated fridge with a four star freezer fits neatly under the work surface and provides a compact, flexible cooling solution for busy kitchens.

K4336XFF00


Built-under single door fridge N 50



ADVANTAGES OF DIFFERENT HINGE TYPES




FIXED HINGE



A fixed hinge offers you additional capacity in the refrigerator, leaving you more room for your food

SLIDING HINGE



Additional space is required on the inner side of the cabinet to make way for the door hinge.

HINGES TO SUIT ALL KITCHEN DESIGNS


Our doors can be right-hinged or left-hinged in order to suit your kitchen design.


FIXED HINGE AND SOFT CLOSE HINGE

The benefit of this type of hinge is that it carries more weight – ideal for kitchen cabinetry made from heavier hard wood. This hinge also allows the door to open at a wider angle, making the fridge cavity easily accessible. All NEFF doors close automatically when at an angle of approximately 15-20° and selected models have the benefit of Soft Close.

SLIDING HINGE

Our sliding hinge feature sits between the appliance and the furniture door and is secured by a series of brackets. As you open the furniture door, the appliance door is also opened via the sliding bracket design.







COOLING EXPLAINED

Food preservation features, functions and design explained

Cooking is all about new ideas and fresh inspiration – and our cooling appliances are no different. They are bursting with innovative features and functions to optimally store the food you love.

DESIGN FEATURES



UNIQUE TO NEFF, MAKING YOUR LIFE EVEN EASIER

Easy Clean Magnetic Door Seals

The magnetic door seals on all of our refrigeration range are removable, making them easy to clean and/or replace if necessary.

Find out more information on cooling features and installation solutions at neff-home .com/uk/



Wire Shelf

Completely unique to NEFF, our new Wire Shelf feature is ideal for securely storing jars and bottles stacked on their

Soft Close

With Soft Close, the fridge door closes automatically when open at an angle of 20° or less. With a soft closing mechanism, it's the ideal addition to kitchens with soft close cabinets.



Easy Lift Door Storage

Easily adjust door storage with just one hand. Combined with Easy Lift Shelves, your fridge space won't restrict your favourite foods and drink.

Anti-spill Trims

Effectively hold up to a pint of liquid in case of accidental spillage. Food is protected below and the clean-up process is a little less messy.



Bottle Rack

Always have a chilled bottle on standby for those impromptu get-togethers.



Easy Lift Shelf

With Easy Lift shelving, it's possible to adjust shelves with just one hand – ever when they're fully loaded. Perfect when inloading shopping or introducing reshly prepared dishes to the fridge.



Easy Access Shelf

The retractable glass shelf allows for easy loading and unloading as well as better access to your food. Ideal for putting the finishing touches to those delicate desserts.



Vario Shelf

Designed to offer complete flexibility in your fridge, sectioned glass shelves can simply be separated and slid underneath when not in use. Ideal for larger dishes, with space left over for a convenient condiments storage area at the back.

OTHER FEATURES & FUNCTIONS

Multiple Cooling Systems

Separate cooling circuits for independent temperature control, to prevent the transference of odours and/or humidity between the fridge and freezer cavities.



Multi Air Flow Cooling

Greatly improves the circulation of air around the fridge, regulating the temperature and humidity levels and eradicating condensation build up, so that your food stays fresher for longer.



No Frost

No Frost freezers automatically react to any signs of frost so it never has a chance to build up. With a No Frost freezer air is blown from the back wall and circulates over food items. As a result, there is no condensation or build up of frost and food does not freeze together.




Low Frost

Low Frost improves performance and reduces frost build up in an energy efficient way. It also provides more storage space due to there being no internal evaporator and you may only need to defrost your freezer every 2-3 years



Super Freeze

Lowers the temperature for rapid freezing when adding fresh food.



Intelligent Cooling

Uses a range of innovative sensors to calculate the quantity of food in the fridge with the outside temperature. The fridge then adjusts the internal cooling power accordingly.

Super Cool

Allows for the increase in temperature that occurs when fresh food is added. As soon as the food is cold, the fridge will readjust to the normal temperature.

Door Open

Door Open and high temperature alarm systems alert you if the door has been left open or a power cut has occurred. Ideal for mitigating food wastage.



Eco Air Flow


Our Eco Air Flow system treats your ingredients as lovingly as you picked them. Eco Air Flow circulates the air evenly in your fridge to keep flavours delicious under ideal cooling conditions.



New Energy label for Fridge and Freezer Appliances

The procedure for determining the energy class is now more comprehensive. It takes into account the type of appliance, its operating principle, the room's temperature and the number and size of storage compartments. The rest of the elements on the new energy label basically remain the same. Energy consumption continues to be specified in kWh as an annual consumption (annum).

The label also provides information on the total volume of all refrigerator compartments and all freezer compartments, if any, and on noise emissions and the noise emission class.



FRIDGE AND FREEZER APPLIANCES:

- 1 QR Code
- 2 Energy efficiency class
- 3 Energy consumption in kWh/ annum (measured under new standard conditions)
- 4 Total volume of all freezer compartments
- 5 Total volume of all refrigerator compartments

emission class

6 Noise emissions expressed in dB(A) re 1 pW and noise



118 neff-home.com/uk/

STORING FOOD IN A COOLING APPLIANCE

Fresh, seasonal ingredients are a staple in any kitchen.

As a result, we've developed a range of preservation systems to help your food stay at its best for as long as possible. Using our FreshSafe humidity control drawers, herbs, fruits and vegetables stay crisp, vibrant and fresher for longer.



OUR INNOVATIVE O'C FRESH SAFE PRESERVATION SYSTEM EXTENDS THE LIFE OF FOOD TIMES TO REDUCE WASTE.



FreshSafe 🖺

the dedicated transparent drawer protects fruit and vegetables.



FreshSafe 🖺

Many vegetables, such as lettuce, need more humidity to preserve their freshness, quality and nutrients. With the FreshSafe 2 drawer you can set the optimum humidity level with a slider. Fruit and vegetables stay fresh for twice as long and retain their wholesomeness.



FreshSafe 🖺

Two climate zones with different humidity levels and temperatures of nearly 0°C make ideal storage conditions and food stays fresh three times as long: the FreshSafe 3 humidity zone locks in vitamins and nutrients much longer. Fruit and vegetables stay firm and retain their flavour. The other FreshSafe 3 zone is ideal for storing fish, meat and hard cheese.




WE'RE COMMITTED TO REDUCING FOOD WASTAGE

Did you know that around a third of the food we buy is thrown away?

The average family of four throws away £680 worth of food per year. At NEFF, we're keen to help you manage your costs by developing the most effective food preservation systems. FreshSafe is a 0°C compartment, independent from the fridge temperature, comprising two humidity zones. The dry section maintains 50% humidity to preserve meat and fish, while the moist zone, at 90% humidity, extends the life of vegetables, salad and fruit.



Uses intelligent sensors to monitor the temperature within the fridge, the freezer and the room outside. This feature ensures that the appliance maintains an optimal storage climate independent of the surrounding ambient temperatures.



WE THROW AWAY 3.6 MILLION TONNES
OF FOOD AND DRINK FROM OUR
HOMES EVERY YEAR*. AT NEFF WE'RE
COMMITTED TO HELPING YOU REDUCE
WASTAGE AND EFFECTIVELY MANAGE
YOUR GROCERY COSTS.



Access to the fresh safe drawers is easy. The telescopic FlexiRail® system allows the drawers to slide out fully for added convenience.





WITH INNOVATIONS IN FOOD PRESERVATION,
NEFF FRIDGES KEEP
YOUR FAVOURITE
INGREDIENTS AT THEIR
BEST FOR LONGER.










KU9202HF0G

N 70

NEW

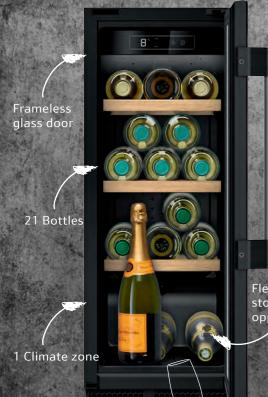

opportunities











BUILT UNDER WINE CABINETS

Individual climates to delight every taste

Introducing for 2021 are our brand new NEFF wine cabinets that keep wine comfortably stored at the ideal drinking temperature. This ensures the joy of a delicious meal by

offering an optimal taste experience through and through - namely by fantastic food and exquisite wine. The allnew N70 60 cm wine cabinet offers you the flexibility to keep Reds and Whites with two individually regulated temperature zones. Ranging from 5°C -20°C, you can also set the temperature of one zone for storing Reds and the other for serving bubbles at your dinner party. The N70 30 cm model allows you to

intuitively use the elegant control panel to set the ideal temperature for your most precious wines. Which you can present nicely any time as the wine cabinet offers enough room to store them. The stylish frameless glass door will let you keep a delighted eye on things while its bamboo shelves will put your environmentally aware mind at ease. These wine cabinets will beautifully integrate in your kitchen and are sure to become a highlight in no time.

		THE RESERVE THE RESERVE THE PARTY OF THE PAR			
		Availability April 2021.	Availability April 2021.		
COLLECTION		N 70	N 70		
MODEL NO.		KU9202HF0G	KU9213HG0G		
DESIGN FEATURES					
Colour of door panels		Black	Black		
Colour of side panels		Black	Black		
Type of glass door		3 glass panels, UV-filtered	3 glass panels, UV-filtered		
Door handle type		Vertical bar handle	Vertical bar handle		
Temperature display		Interior / Digital LED	Interior / Digital LED		
Reversible door, hinged on right	i	•	•		
Home connect / Built in cameras	5				
KEY FEATURES – WINE CABINE	T SECTION				
Range of temperature (0°C)		5 - 20	5 - 20		
Temperature zones		1	2		
LED light		LED	LED		
Number of shelves		4	5		
Number of bamboo shelves		3	3		
Number of adjustable shelves					
LED lighting with soft start & pr	esenter lighting	•	•		
Capacity in 0.75l (Bordeaux bot	tles)	21	44		
FUNCTIONS					
Door open warning signal/malf	unction	•	•		
Child lock		•	•		
PERFORMANCE & CONSUMPT	ION				
Energy efficiency class		A F	G		
Energy consumption ¹	kWh/annum	100	130		
Refrigerator net capacity	L	561	108		
Climate Class ²		SN-ST	SN-ST		
Noise level dB (A) re 1 pW		38 dB	38 dB		
Noise level class		С	С		
Height of product	mm	818	818		
Width of product	mm	298	598		
Depth of product	mm	567	581		

AMERICAN-STYLE FRIDGE FREEZERS

Big and bold

Supersized for family-life, our American-style fridge freezer truly has a place for everything. With storage solutions to keep your fruit and vegetables fresh, freezer compartments for large joints of meat, and enough door trays for those everyday favourites, our American design is perfect for British kitchens. Featuring a water and ice dispenser, plumb your fridge into the mains for ice cold drinks on tap.

AMERICAN-INSPIRED DESIGN FOR NEFF-INSPIRED KITCHENS

COLLECTION		N 70	
MODEL NO.		KA3923IE0G	
DESIGN FEATURES			
Colour of door panels		Stainless steel anti fingerprint	
Colour of sides		Grey	
Style of handle		vertical bar handle	
Colour of handle		Stainless steel	
NoFrost in fridge and freezer		•	
Home Connect, Wi-Fi dongle in	ncluded	-	
FOOD FRESHNESS SYSTEM			
FreshSafe		2 x FreshSafe drawers on rails	
KEY FEATURES - FRIDGE SECT	ION		
Product highlights		LED	
Super Cool		•	
Type of control		Electronic	
Number of shelves		5	
Number of adjustable shelves		-	
Bottle shelves in fridge		•	
Number of door bins / shelves	;	5	
Temperature display		Digital	
Warning signal door open		•	
KEY FEATURES - FREEZER SE	CTION		
Door opened indicator		•	
Super Freeze function		•	
Temperature adjustable in fre	ezer	•	
Number of ice cube trays		Automatic ice cube maker	
Ice dispenser features		Crushed ice, ice cubes, water, water fi	
Number of freezer drawers		2	
ADDITIONAL INFORMATION			
Energy efficiency class		â E	
Energy consumption ¹	kWh/annum	324	
Total net capacity	L	562	
Refrigerator net capacity	L	371	
Freezer net capacity	L	191	
Climate Class ²		SN-T	
Noise level (dB [A] re 1 pW)		42 dB	
Noise level class		D	
Additional accessories include	ed	1 x connection hose, 2 x egg tray	
Height of product	mm	1787	
Width of product	mm	908	
Depth of product	mm	707	

DESIGN/PERFORMANCE











KA3923IE0G

nerican-Style Fridge Freezer



FreshSafe drawers on rails



With state of the art food preservation technology, our built-in fridge freezer range offers the ideal solution for busy families and passionate cooks. Innovative refrigeration features include Home Connect available within the N90 Collection along with Telescopic Flexi Rail Drawers for easy access, Fresh Safe humidity controlled zones and efficient LED interior lighting. With No Frost and Low Frost freezers available in the range, the freezer compartment delivers on intelligent features too.



DESIGN/PERFORMANCE



DESIC		01		165,6300
	Height (cm)	W1-F1	Fridge Capacity	Freezer Capacity
å E	177	<u>Ş</u>	156 LITHER (NAT)	67
Electronic Control	Noise Level	No Frost	Fresh Safe	Fixed Hinge Door

KI7863DF0G Built-in Fridge Freezer

10000	COLLECTION	
23%	MODEL NO.	
96	DESIGN FEATURES	
33	Fridge / Freezer split	
23	No Frost	
	Low Frost	
93	Soft Close hinge	
200	Type of hinge (reversible)	
	Home Connect	
20	FOOD FRESHNESS SYSTEM	
	FreshSafe	
83	KEY FEATURES – FRIDGE SECTION	
	Light	
	Super Cool function	
	Type of control	
20	Number of shelves	
	Number of adjustable shelves	
30	Number of door bins / shelves	
	Type of shelves	
	Temperature display	
	Warning signal door open	
	Bottle shelves in fridge	
8	KEY FEATURES – FREEZER SECTION	
	Door opened indicator	
	Super Freeze function	
	Temperature adjustable in freezer	
	Number of ice cube trays	
	Number of freezer drawers	
20	ADDITIONAL INFORMATION	
	Energy efficiency class	
	Energy consumption ¹	kWh/annum
	Total net capacity	L
	Refrigerator net capacity 4°C - 8°C	L
	Refrigerator net capacity 0°C	L
33	Freezer net capacity	L
	Climate class ²	
8	Noise level (dB(A) re 1 pW)	
	Noise level class	
	Additional accessories included	
	Height of product	mm
10	Width of product	mm

FLEXIBLE STORAGE FRIDGE FREEZER









		MOTE IN	for new models.	please check website for new models.		1
N 90	N 70	N 70	N 50	N 50	N 70	N 70
KI8865DE0	KI7863DF0G	KI7853DE0G	KI7862FF0G	KI7862SF0G	KI6873FE0G	KI6863FE0G
60/40	60/40	50/50	60/40	60/40	70/30	60/40
•	•	•	•	•	70,30	30, 10
					Low Frost	Low Frost
•	•	•				
Fixed hinge	Fixed hinge	Fixed hinge	Fixed hinge	Sliding hinge	Fixed hinge	Fixed hinge
2 x FreshSafe 3 0°	1 x FreshSafe 2 drawers	1 x FreshSafe 2 drawers	1 x FreshSafe drawer	1 x FreshSafe drawer	1 x FreshSafe 2 drawers	1 x FreshSafe 2 drawers
drawers	TX FIESTISATE 2 drawers	1 x Freshsale 2 drawers	i x Freshsale drawer	1 x FreshSale drawer	1 x Freshsale 2 drawers	1 x Freshsale 2 drawers
LED	LED	LED	LED	LED	LED	LED
•	•	•			•	•
Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
3	5	4	4	4	5	4
2	4	3	3	3	4	4
2	5	3	4	4	5	5
Safety glass	Safety glass	Safety glass	Safety glass	Safety glass	Safety glass	Safety glass
Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital 7 segment
•	•	•	•	•	•	•
•	•				•	
•	•	•			•	•
•	•	•	•	•	•	•
•	•	•			•	•
1	1	1	1	1	1	1
3	3	4	3	3	2	3
A E	A F	A E	A F	A F	A E	AE
252	277	236	277	277	207	219
223	254	247	254	254	272	266
156	187	155	187	187	209	192
55						
67	67	92	67	67	63	74
SN-ST	SN-ST	SN-ST	SN-ST	SN-ST	SN-T	SN-ST
36 dB	39 dB	39 dB	39 dB	39 dB	36 dB	36 dB
С	С	С	С	С	С	С
2 x egg trays, 1 x ice cube tray, 1 x bottle holder in door tray	2 x ice packs, 2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray, 1 x bottle holder in door tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray, 1 x bottle holder in door tray	2 x egg trays, 1 x ice cube tray, 1 x bottle holder in door tray
1772	1772	1772	1772	1772	1772	1772
558	558	558	541	541	558	558
E / E	EAE	E / E	EAE	E / E	E / E	EAE









Split 60/40

Split 70/30

Split 60/40

Our built-in fridge freezers offer flexibility and plenty of storage space, so you can easily browse fresh and frozen ingredients before getting creative in the kitchen. If family life makes ample freezer space essential, a 50/50 split fridge freezer provides the perfect solution.

KI5872FE0G

Fridge / Freezer split

KEY FEATURES - FRIDGE SECTIO

Number of adjustable shelves Number of door bins / shelves

Bottle shelves in fridge KEY FEATURES - FREEZER Door opened indicator

Total net capacity

Width of product

Refrigerator net capacity 4°C - 8°C Refrigerator net capacity 0°C Freezer net capacity Climate class²

Noise level (dB(A) re 1 pW) Noise level class

Additional accessories included

Super Cool function Type of control

Low Frost Soft Close hinge Type of hinge (reversible Home Connect FOOD FRESHNESS SYS FreshSafe





DESIGN/PERFORMANCE









ULTIMATE FRIDGE FREEZER FLEXIBILITY











	No.	的经验人员的	for new models.	for new models.	
N 50					
KI5872FE0G	KI5872SE0G	KI5862SE0G	KI5852FF0G	KI5852SF0G	KI5871SF0G
70/30	70/30	60/40	50/50	50/50	70/30
70/30	70/30	00/40	50/50	50/50	70/30
Low Frost					
Fixed hinge	Sliding hinge	Sliding hinge	Fixed hinge	Sliding hinge	Sliding hinge
1 x FreshSafe drawer					
LED	LED	LED	LED	LED	LED
Flantania.	Flantania	Flantania	Fl	Fl+i-	
Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
5	5	4	4	4	5
4	4	3	3	3	4
	4 Safety glass	Safety glass	4 Safety glass	Safety glass	4 Safety glass
Safety glass digital LED	digital LED	digital LED	digital LED	digital LED	digital LED
•	•	•	•	•	•
1	1	1	1	1	1
2	2	3	4	4	2
A E	A E	A E	F	F	â F
216	216	229	285	285	270
270	270	269	261	261	270
200	200	184	159	159	200
70	70	85	102	102	70
SN-ST	SN-ST	SN-ST	SN-T	SN-T	SN-ST
35 dB	35 dB	35 Db	38 dB	38 dB	39 dB
В	В	В	С	С	С
2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray	2 x egg trays, 1 x ice cube tray
1772	1772	1772	1772	1772	1772
541	541	541	541	541	541







Split

Split

Split 70/30

BUILT-IN SINGLE DOOR FRIDGES & FREEZERS

177cm high - A spacious integrated solution

Designed to seamlessly fit around your kitchen design, our builtin solutions allow you to create a sleek integrated effect without compromising on valuable refrigeration space. Featuring Fresh Sense constant temperature control and an automatic defrost fridge, our 177cm fridges and freezers are designed to save time and energy while providing the optimum environment for fresh meats, dairy produce and vegetables.

PERFECT SIDE-BY-SIDE COMBINATIONS



GI7815CE0G Built-in Single Door Freezer



DESIGN/PERFORMANCE
















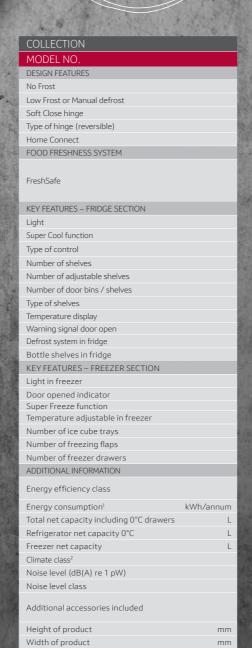

Depth of product



N 90	N 70	N 70	N 50	N 50	N 90	N 90
KI8816DE0	KI2823FF0G	KI1813FE0G	KI2822SF0G	KI1812SF0G	GI7815CE0G	GI7813EF
					•	•
•					•	
Fixed hinge	Fixed hinge	Fixed hinge	Sliding hinge	Sliding hinge	Fixed hinge	Fixed hing
					•	
3 x FreshSafe 3 0°	1 x FreshSafe 2 drawers on telescopic rails,	1 x FreshSafe 2 drawers on telescopic rails,				
drawers	1 x FreshSafe drawer on	1 x FreshSafe drawer on	2 x FreshSafe drawers	2 x FreshSafe drawers		
	telescopic rails	telescopic rails				
LED	LED	LED	LED	LED		
•	•	•	•	•		
Electronic	Electronic	Electronic	Electronic	Electronic		
7	5	7	5	7		
6	4	6	4	6		
5	5	6	5	6		
Safety glass	Safety glass	Safety glass	Safety glass	Safety glass		
digital 7 segment	digital 7 segment	digital 7 segment	digital LED	digital LED		
•	•	•				
Automatic	Automatic	Automatic	Automatic	Automatic		
•	•	•				
					•	•
					•	•
						•
	1		1		1	1
	1		1		2	2
					5	5
å E	å F	Î E	Å F	Å F	Î E	å F
150	222	115	222	144	235	294
289	286	319	286	319	212	212
83						
	34		34		212	212
SN-T	SN-ST	SN-T	SN-ST	SN-T	SN-T	SN-T
37 dB	36 dB	37 dB	39 dB	37 dB	35 dB	36 dB
С	С	С	С	С	В	С
2 x egg trays, I x bottle holder in door tray	2 x egg trays, 1 x ice cube tray	2 x egg trays	2 x egg trays, 1 x ice cube tray	2 x egg trays	1 x ice cube tray	1 x ice cube
1772	1772	1772	1772	1772	1772	1772
558	558	558	541	541	558	558
545	545	545	545	545	545	545







INFORMATION PLEASE VISIT NEFF-HOME.

Plenty of space for family life

Slightly smaller in size, our 140cm and 122cm models are popular with busy family kitchens, offering plenty of storage space. While these fridges & freezers may have less storage space, they more than make up for this, thanks to a range of innovative features to maximise shelf space. With Vario Shelf allowing for taller items and a generous FreshSafe humidity controlled compartment, there's plenty of room for your favourite food and drinks.



Low Frost or Manual defrost Soft Close hinge Type of hinge (reve

FreshSafe KEY FEATURES -Super Cool function

Type of control Number of shelves

Number of door bins / shelve

KI1513FF0

Built-in Single Door Fridge

KI1413FD0 Built-in Single Door Fridge



FreshSafe 2

DESIGN/PERFORMANCE









SEAMLESS AND MODERN DESIGN









N 70	N 70	N 70	N 30	N 70
KI1513FF0	KI1413FD0	KI1413FF0	K1544XSF0	GI7416CEC
				•
	•			•
Fixed hinge	Fixed hinge	Fixed hinge	Sliding hinge	Sliding hinge
x FreshSafe 2 drawer	1 x FreshSafe 2 drawer	1 x FreshSafe 2 drawer		
LED	LED	LED	1 x 25 Watt	
•	•	•		
Electronic	Electronic	Electronic	Mechanical	
6	6	6	6	
5	5	5	5	
5	4	4	4	
Safety glass	Safety glass	Safety glass	Safety glass	
digital 7 segment	digital 7 segment	digital 7 segment		
•	•	•		
Automatic	Automatic	Automatic	Automatic	
•	•	•		
				•
				•
				•
				1
				1
				5
₹ F	A D	A F	Å F	A E
133	81	123	129	206
247	211	211	221	130
SN-T	SN-T	SN-T	SN-ST	SN-T
33 dB	34 dB	34 dB	37 dB	36 dB
В	В	В	С	С
2 x egg tray	2 x egg tray	2 x egg tray	1 x egg tray	1 x ice cube tra
1397	1221	1221	1221	1221
558	558	558	541	558
545	545	545	542	545








Total net capacity including 0°C drawers

Freezer net capacity

Height of product Width of product

Noise level (dB(A) re 1 pW)



A smaller size shouldn't mean less functionality and our 102cm and 87cm high fridges & freezers deliver a range of innovative NEFF features. With a FreshSafe humidity-controlled drawer, FreshSense constant temperature control and Super Cool technology, the right temperature and conditions are always maintained.

KI536XFF0

Built-in Single Door Fridge

GI624SE0G Built-in Single Door Freezer

N 50



DESIGN/PERFORMANCE











GI1113FE0Built-in Single Door Freezer

DESIGN/PERFORMANCE







Low Frost or Manual defrost Type of hinge (reversible) FOOD FRESHNESS SYSTEM KEY FEATURES - FRIDGE SECTION

Super Cool function Type of control Number of shelves Number of door bins / shelves Type of shelves Warning signal door open Defrost system in fridge KEY FEATURES - FREEZER SEC Door opened indicator

Super Freeze function Temperature adjustable in freeze Number of ice cube trays Number of freezing flaps Number of freezer drawers ADDITIONAL INFORMATION

Energy consumption¹ Total net capacity including 0°C drawers Freezer net capacity Climate class² Noise level (dB(A) re 1 pW) Noise level class Additional accessories included Height of product Width of product

COLLECTION

No Frost Low Frost or Manual defrost Soft Close hinge Type of hinge (reversible) Key features - Freezer se Liaht in freeze Door opened indicator Super Freeze function Temperature adjustable in freezer Number of ice cube trays Number of freezing flaps ADDITIONAL INFORMATION

Energy efficiency class	
Energy consumption ¹	kWh/annum
Total net capacity including 0°C drawers	L
Refrigerator net capacity 0°C	L
Freezer net capacity	L
Climate class ²	
Noise level (dB(A) re 1 pW)	
Additional accessories included	
Height of product	mm
Width of product	mm
Depth of product	mm

35.35







是是是是				经验的 工作。在他们是
N 30	N 70	N 30	N 50	N 50
K1536XFF0	KI1213DD0	K1514XF0G	GI1216DE0	G1624SE0G
			•	•
			•	
Fixed hinge	Fixed hinge	Sliding hinge	Fixed hinge	Sliding hinge
1 x Vegetable drawer	1 x FreshSafe 2 drawers	1 x Vegetable drawer		
1 x 25 Watt	LED •	1 x 25 Watt		
Mechanical	·	Mechanical		
Mechanical 5	Electronic 4	Mechanical 4		
4	3	3		
4	3	4		
Safety glass	Safety glass	Safety glass		
Salety glass	digital 7 segment	Salety glass		
	• •			
Automatic	Automatic	Automatic		
, idea induc	·	riotomatic		
			•	•
			•	•
			•	•
			1	1
			0	0
			3	4
Î F	A D	Î F	Δ E	A E
123 181	75 144	118	176 96	178 102
181	144	150	96	102
SN-ST	SN-T	SN-ST	SN-T	SN-ST
37 dB	33 dB	37 dB	36 Db	38 dB
C	В	C	C C	C
1 x egg tray	2 x egg trays	1 x butter dish	1 x ice cube tray	1 x ice cube tray
1021	874	874	874	874
541	558	541	558	541
542	545	542	545	542
THE RESERVE OF THE PARTY OF THE	经济的	The second second		HUNDRED BY COMPANY



Fixed hinge

167

SN-T 36 dB

> 712 558





1.Actual energy consumption will depend on how the appliance is used and where it is located. 2.Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

FOR MORE RECIPES, VISIT

Create your own cooling solution

Designed to be built under the worktop, our single door fridges and freezers offer the ideal cooling solutions for busy family kitchens.

K4336XFF0G

Built-under Single Door Fridge with Freezer Section

K4316XFF0G

Built-under Single Door Fridge

PERFECT UNDER-COUNTER COOLING SOLUTION

















DESIGN/PERFORMANCE











82CM HIGH




DESIGN/PERFORMANCE









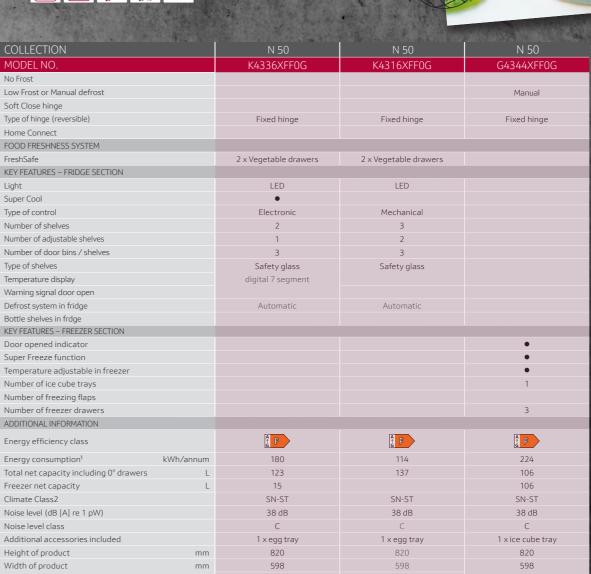

1.Actual energy consumption will depend on how the appliance is used and where it is located.
2.Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

DISHWASHERS

Clean dishes, whatever your wishes

When you've got the exact look you want for your kitchen, NEFF Built-In Dishwashers are a great solution. With flexible features and a programme for every occasion; from Chef 70° for very dirty dishes to Auto, you can count on glistening results. Hidden away under counters or in tall cupboards for an eye-level option, these will be your kitchen's

HOME CONNECT NOW AVAILABLE ON ALL!

♠ Home Connect

THE COLLECTION

Choosing the right appliance to complement your kitchen and lifestyle can be challenging. To help you select the perfect kitchen companion,

N 90

STYLES OF DISHWASHER

- 60cm Fully Integrated
- 81.5cm Height



Touch Control with TFT display

FFATURES

THIS COLLECTION CAN INCLUDE*:

Home Connect

9.5 Litre water capacity

Zeolith

8 programmes

6 options

Real time clock

Flex 2 baskets

Flex Cutlery Drawer

Open Dry

TimeLight

Door Open Assist

White Emotion Light

N 70

STYLES OF DISHWASHER

- 60cm Fully Integrated
- 81.5cm Height

Touch Control with LFD display

FFATURES

THIS COLLECTION CAN INCLUDE*:-

Home Connect

7.7 Litre water capacity

Zeolith

8 programmes

5 options

Flex 2 baskets

Flex Cutlery Drawer

Open Dry

Timel ight Door Open Assist

White Emotion Light

N 50

STYLES OF DISHWASHER

- 60cm Fully Integrated
- 45cm Fully Integrated
- 8 81.5cm and 86.5cm Height

FEATURES

THIS COLLECTION CAN INCLUDE*:-

Home Connect

9.5 Litre water capacity

6 programmes

5 options

Flex 2 baskets Flex Cutlery Drawer

Gap Illumination

Vario Hinge

Toggle Control with LED display

60cm Fully Integrated

60cm Semi-integrated

81.5cm Height

FEATURES

THIS COLLECTION CAN INCLUDE*:

N 30

STYLES OF DISHWASHER

Home Connect

9.5 Litre water capacity

5 programmes

5 options

Flex 1 baskets

Flex Cutlery Drawer

* The features included in each collection are an overview only Please ensure that you check the product detail for exact features of each mode

OUR DISHWASHERS SUIT YOUR COOKING STYLE

FULL SIZE DISHWASHERS

Designed to be as flexible and accommodating as possible, our full-sized dishwashers have adjustable baskets and racks to hold large or awkward items, as well as a choice of wash cycles, from intensive to delicate.

SLIMLINE DISHWASHERS

Where space is an issue, our SlimLine model **S875HKX20G** is ideal. Just 45cm wide, it fits into the smallest of spaces, but still offers all the features of a full size model. It's surprisingly roomy and able to cope with nine place settings at a time.



VARIO HINGE MODELS

In addition to the two height sizes (81.5cm and 86.5cm), dishwashers with VarioHinge - S195HCX26G and S295HCX26G - are the perfect solution for

installations with limited clearance between the bottom of the door and the plinth. VarioHinge allows the kitchen frontal to slide up the dishwasher door slightly, as it lowers, clearing the plinth to give you a flush and sleek look to your kitchen.

GAP ILLUMINATION NOW ADDED TO VARIO HINGE MODELS

FULLY INTEGRATED DISHWASHERS

INVISIBLE TO THE EYE. POWERFUL ON YOUR DISHES

Our fully integrated dishwashers are seamlessly tucked away into your kitchen and offer innovative programmes to take care of all your cookware. With settings for the most stubborn stains and intelligent care programmes for your most delicate glassware, we've created a cleaning solution for all your everyday cooking and dining utensils. Extra Hygiene introduces a final rinse at very high temperatures to fight bacteria - perfect for baby bottles* or chopping boards.



*Please note this program does not sterilise.

SEMI-INTEGRATED DISHWASHERS

SLEEK EFFICIENCY

Providing easy access to a front control panel and tastefully integrating with your furniture, our semi-integrated dishwashers are a popular choice in kitchen design. Simple to use, your pots, pans, crockery, and glassware come out clean and dry, all just using 10.5L of water





136 neff-home.com/uk/

DISHWASHING FLEXIBILITY

The more flex you choose, the better space is used

Whether you have large sturdy pots or delicate glasses, the Flex basket system adapts to your crockery and utensils meaning the baskets can be adjusted to your needs and all dishes are left beautifully clean.

FLEX BASKETS

Fitting casserole dishes, large pans, full dinner sets and tall-stem wine glasses into a dishwasher can be a challenge – especially when you're cleaning your most robust cookware alongside delicate items. Our Flex Baskets are designed to accommodate those bulkier items and provide an even, thorough clean. We have two options of basket flexibility to choose from



Flex 1 – Features two foldable elements in the top and bottom basket providing the freedom to adapt loading of different items – including large dishes or any type of cookware. Place your tableware the way you want and enjoy shining



Flex 2 – Create custom space across all loading levels, featuring coloured touch points along with six foldable areas in the top rack and a further six in the bottom Anti-slip elements and stemware support within the top rack provide safe positioning for your glassware. Flex 2 baskets provide great flexibility with quick and easy loading solutions of glasses, cups, pots and pans.









FLEX CUTLERY DRAWER

Imagine a flexible buddy in the top tier of your dishwasher – and now picture our Flex Cutlery Drawer. It handily clicks into place whenever you need a tailor-made place for your forks, knives, and kitchen utensils.





Rack-Matic allows the top basket to be raised or lowered into three different positions. With the option to adjust the basket even when fully loaded, those last minute wine glasses can still go in at the end of the night. The top basket can also run on an angle, using two different heights either side which helps moisture drain away, aiding the drying process.




FLOOR PROJECTION DISPLAYS



Let there be light

Knowing when your dishwasher cycle is in action has never been easier, or looked cooler. Clearly lit on the floor of your kitchen, our innovative and stylish floor projection features indicate when the dishwasher is still working hard on your dishes, so you don't have to open and check. New Gap Illumination will help to keep you in the loop at all times. Soft side light will let you know when the dishwasher is running.



Never interrupt a cycle again

Time Light projects the remaining time of the dishwasher cycle and other information onto the floor in front of your machine. Stylish, contemporary and practical, there's no risk of disrupting your wash. The end-of-cycle sound can also be turned off, handy for open-plan living.





INFO LIGHT

Let the floor do the talking

Info Light projects a red light on the floor below your dishwasher which indicates the machine is still running. Available across selected models, Info Light will stylishly project onto



GAP ILLUMINATION

A distinct light bar to keep you in the loop

Gap Illumination shines a soft white light on the side of the dishwasher to indicate the dishwasher is running. If you pause the cycle or open the door, the light will start blinking. This feature is available across Vario Hinge models.



HOME CONNECT



Wash dishes, wherever you are

All of our dishwashers are now Wi-Fi-enabled, so you can manage your appliance via voice command or using the Home Connect app on your smart device. Our Easy Start feature means the dishwasher determines the best programme in three easy steps through asking a series of simple questions about your load, then all you have to do is tap start on your device. The dishwasher will notify you when you're getting low on salt and rinse, telling you how many washes you have left till you run out, and send you a reminder when you do. This ensures you don't forget to add them to your shopping list. Our Home Connect app also monitors how many tablets have been used and will let you know when they're running out. Better yet, your dishwasher can even put in an order for more using smart reorder via Amazon Alexa. Now that's easy cleaning!



Home Connect



KEY FEATURES



EXTRA CLEANING POWER FOR CREATIVE COOKS

With a hotter setting and a powerful spray, the Chef 70° programme is perfect for cleaning even the dirtiest pots, pans and cooking utensils. Items placed in the lower basket are subject to higher spray pressures, eliminating the need for soaking and effectively removing even the most stubborn stains.



DOOR OPEN ASSIST

The ideal choice for seamless kitchens

Door Open Assist is the perfect solution for anybody looking to achieve a sleek, handleless design in their kitchen. Simply press lightly on the front of the unit to open the dishwasher door. Ideal for a range of integrated designs, Door Open Assist is also a convenient addition to busy kitchens. Electronic child lock can be activated, creating a double push to open







GLASS CARE SYSTEM

CARE FOR YOUR MOST DELICATE GLASSWARE

Your dishwasher has a thing for delicate glassware, so it fine-tunes the water hardness to protect your glassware with never-ending care. A combination of the Glass 40° programme and Extra Shine option will clean your items impeccably without worry. With the introduction of anti-slip surfaces, silicon inserts and supports within Flex 2 baskets your glassware has never been more protected.





A form of mineral, Zeolith has the ability to absorb moisture and turn it in to heat. The heat produced naturally by Zeolith is used during the drying cycle, ensuring that no additional energy is needed to dry your cookware. With the ability to absorb moisture, your glasses will come out steam free and will be cool enough to handle. Automatically activated by programmes with a drying phase, Zeolith regenerates itself and lasts a lifetime, so you don't have to maintain it.



DISHWASHER FUNCTIONS & PROGRAMMES



All of our dishwashers come with a choice of programmes, from intensive wash cycles capable of tackling tough, burnt-on food, to delicate washes for glassware.

FUNCTIONS & PROGRAMMES



AQUA STOP



GAP ILLUMINATION

Gap Illumination shines a soft white light on the side of the dishwasher to indicate the dishwasher is running. If you pause the cycle or open the door, the light will start blinking. This feature is available across Vario Hinge models.



OPEN DRY

No need to manually open the door of your dishwasher to allow the load to cool off. Open Dry takes care of that by opening the



FAVOURITE

and save it as "Favourite", either via your Home Connect app or directly on the dishwasher.



TIME LIGHT

Time Light projects the remaining time as well as the ongoing process of the programme on any type of kitchen floor. Time Light is available for fully integrated dishwashers and washing machines.



INFO LIGHT

Info Light projects a red light onto the floor that showcases clearly that this dishwasher is in operation. Info Light is available for fully integrated dishwashers.



VARIO HINGE

Vario Hinge attaches your furniture front to the door of the fully integrated dishwasher, regardless of whether it's on the floor or in a high cabinet. Vario Hinge smoothly lifts the furniture front above the plinth and base.



you wish for peace and calm select this option via the Home Connect app. On activation the cycle will pause for 30 minutes. You have the flexibility to restart



EXTRA SPEED

Depending on the selected takes care of the load up to three times faster



1 HOUR 65°

No need to stack your dinner or party dishes for hours, simply load the dishwasher again This function cleans and dries dishes in only 60 minutes. Spend more quality time with family and friends while enjoying food and tales using your favourite



HEAT EXCHANGER

Ensures that the drying phase of programmes is energy efficient and glassware is fully protected by preventing extreme temperatures.



AUTOMATIC PROGRAMMES

Take the worry out of selecting exactly the right programme and let the machine do it for you. Automatically changes settings to ensure you get the best clean for your load.



EMOTION LIGHT

LED lights in the front edge light up the dishwasher cavity



EASY CLEAN

Give your dishwasher a deep clean with the new Easy Clean programme. Simply run the high temperature setting together imescale and grease from inside



Programme Shine & Dry EXTRA SHINE

By increasing the amount of water during the rinse cycle and extending the drying phase water marks are prevented and the drying result is further



POWER ZONE

Activates higher wash temperatures and increases spray arm pressure in the bottom basket, while maintaining a more gentle wash in the top basket.

FXTRA HYGIFNE

Provides a hotter final rinse, with 70°C water for 10 minutes, to effectively cleanse items such as chopping boards and cooking



10-YEAR, ANTI-RUST WARRANTY

Due to advanced materials and manufacturing technologies, in addition to our standard appliance warranty, we're able to provide a free-of-charge warranty against the rustingthrough of the dishwasher's inner cavity.

*Please note this programme does not sterilise.

FULLY INTEGRATED DISHWASHERS



Tough on pots and pans, gentle on glassware and crockery

Our fully integrated dishwashers are full of hidden talents and features such as Wi-Fi connectivity, Time Light, Vario Hinge, Aqua Stop and Door Open Assist. Zeolith® works with naturally-occurring minerals to dry your cookware and Chef 70° is a brilliant function to get rid of stubborn pan stains after a hard night's cooking. Time Light projects the cycle's remaining time left onto the floor for added convenience. Features like our Flex 2 Baskets and Flex Cutlery Drawers make our fully integrated dishwashers as adaptable as possible.










Time Light

DESIGN/PERFORMANCE

A B	Height (cm)	Agua Shop	Thre Light	Touch Control	WI-FI	Emotion Lie
Rack Matic	Extra Speed	Favourite	Flex Cutlery Drawer	Open Dry	Aush to Open	Programm Shine & D

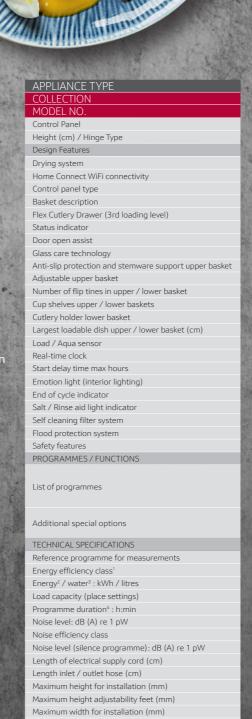

Height of the product (mm)

Width / Depth of the product (mm) Net weight / Gross weight (kg)


Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)



60CM FULLY INTEGRATED							
N 90	N 70	N 70	N 50	N 50			
S189YCX01E	S187ZCX43G	S187ECX23G	S295HCX26G	S195HCX26G			
Grey	Grey	Grey	Stainless steel	Stainless steel			
81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	86.5 / Vario Hinge	81.5 / Vario Hinge			
Zeolith / Open Dry	Zeolith	Heat exchanger / Open Dry	Heat exchanger	Heat exchanger			
Zeolidi / Open Di)	Zeoliti	Tiede exclidinger / Open 1.)	neat exchanger	Ticat exchange.			
Touch control + TFT	Touch control + LED	Touch control + LED	Push buttons + LED	Push buttons + LED			
Flex 2	Flex 2	Flex 2	Flex 2	Flex 2			
Flex 2	Flex 2	Flex Z	Flex Z	Flex 2			
		-		· · · · · · · · · · · · · · · · · · ·			
Time Light (White)	Time Light (White)	Time Light (White)	Gap Illumination (White)	Gap Illumination (White)			
•				•			
•	•	•	•	•			
•	•	•	•	•			
Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage			
6/6	6/6	6/6	6/6	6/6			
2/2	2/2	2/2	2/2	2/2			
21 / 31	21 / 31	21 / 31	23 / 34	21 / 31			
•	•	•	•	•			
•							
24	24	24	24	24			
•	•	•					
Acoustic	Acoustic	Acoustic	Acoustic	Acoustic			
•/•	•/•	•/•	•/•	•/•			
•	•	•	•	•			
AquaStop	AquaStop	AquaStop	AquaStop	AquaStop			
Door lock	Door lock	Door lock	Door lock	Door lock			
Door loc.	Bool loc.	Bool lock	Bool loc.	Bool lock			
5 - 50°C Auto 45 65°C Chef 70°C	Eco 50 °C, Auto 45-65 °C, Chef 70 °C,	5 50°C Auto 45 65°C Chef 70°C					
Classic 60 °C, Express 45 °C,	Classic 60 °C, Express 45 °C,	Classic 60 °C, Express 45 °C,	ECO 50 C, AULO 45-05 C, Chei 70 C,	Eco 50 °C, Auto 45-65 °C, Chef 70 °C,			
Glass 40 °C, Silence 50 °C,	Glass 40 °C, Silence 50 °C,	Glass 40 °C, Silence 50 °C,	Classic 60 °C, Glass 40 °C, Favourite, Easy Clean"	Classic 60 °C, Glass 40 °C, Favourite, Easy Clean			
Favourite, Easy Clean	Favourite, Easy Clean	Favourite, Easy Clean	Tavodine, 200, 1111	ravounte, zazy zaz			
Remote Start, Extra Shine,	Remote Start, Extra Shine,	Remote Start, Extra Dry,	Remote Start, Extra Dry,	Remote Start, Extra Dry,			
Power Zone, Extra Hygiene, Extra Speed	Power Zone, Extra Speed	Power Zone, Extra Speed	Power Zone, Extra Speed	Power Zone, Extra Speed			
Extra opera							
Eco 50 °C	Eco 50 °C	Eco 50 °C	Eco 50 °C	Eco 50 °C			
âB>	€ G >	[D		2 D			
65 / 9.5	74 / 7.7	85 / 9.5	85 / 9.5	85 / 9.5			
05/9.5	13	14	14	14			
3:55	3:45	4:35	4:55	4:55			
43 P	44 P	42 P	46	46			
В	В (2)	В	С	С			
41	42	39					
175	175	175	175	175			
165 / 190	165 / 190	165 / 190	165 / 190	165 / 190			
875	875	875	925	875			
60	60	60	60	60			
600	600	600	600	600			
815	815	815	865	815			
598 / 550	598 / 550	598 / 550	598 / 550	598 / 550			
44 / 46	35/38	42 / 45	35 / 38	35 / 38			
•	•	•	•	•			
50	50	50	50	50			
60	60	60	60	60			
Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel			
	Large item spray head, including	Large item spray head, including	Large item spray head, including	Large item spray head, including			
Steam protection plate	Steam protection plate	Steam protection plate	Steam protection plate	Steam protection plate			

neff-home.com/uk/

FULLY INTEGRATED DISHWASHERS



Room to fit it all

Completely invisible behind your chosen cabinetry, it's incredibly quiet, yet packed with ideas to make cleaning as effortless and eco-friendly as possible. Our fully-integrated models are WiFi enabled, and offer flexibility to customise settings to your needs. Speed up your cycle at anytime or save your favourite programme and option combination with a single touch. The informative Info Light function projects a red light onto the floor when the dishwasher is still running, so you never need to interrupt a cycle. Chef 70° gets rid of the most stubborn stains plus features like our Flex 1 & Flex 2 baskets and Flex Cutlery Drawer make your dishwasher as adaptable as possible.







Flex Cutlery Drawer



Time Light

DESIGN/PERFORMANCE























Load capacity (place settings) Noise level: dB (A) re 1 pW Noise efficiency class

Noise level (silence programme): dB (A) re 1 pW Length of electrical supply cord (cm)

Maximum height for installation (mm) Maximum height adjustability feet (mm)

Maximum width for installation (mm) Height of the product (mm)

Width / Depth of the product (mm) Net weight / Gross weight (kg)

Maximum accepted water hardness (°DH) Maximum temperature for water intake (°C)

Included accessories



		60CM FILLIV	INTEGRATED		and the second s
N 50	N 50	N 50	N 30	N 30	N 30
N 50 S155HCX27G	S155HAX27G	S155HVX15G	S153HCX02G	S153HAX02G	S153ITX05G
	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stainless steel	81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	
81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	81.5 / Fixed	81.5 / Fixed
Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Inherent heat
Push buttons + LED	Push buttons + LED	Push buttons + LED	TItI : LED	TItI . LED	Tarada arabada LED
			Toggle control + LED	Toggle control + LED	Toggle control + LED
Flex 2	Flex 2	Flex II	Flex 1	Flex 1	Flex 1
Time Light (White)	Time Light (White)	Info Light (Red)	Info Light (Red)	Info Light (Red)	Info Light (Red)
•	•	•	•	•	•
Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage	Rack Matic 3-stage	Height adjustable top basket
6/6	6/6	2/4	2/2	2/2	-/2
2/2	2/2	2 / -	2/2	2 / -	
	•			•	•
21 / 31	27 / 31	21 / 31	21 / 31	27 / 31	27 / 31
•	•	•	•	•	•
24	24	24	9	9	9
			-	-	
Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic
•/•	•/•	•/•	•/•	•/•	•/•
•	•	•	•	•	•
AquaStop	AquaStop	AquaStop	AquaStop	AquaStop	AquaStop
Door lock	Door lock	Door lock	Door lock	Door lock	Door lock
Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Glass 40 °C, Favourite, Easy Clean	Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Glass 40 °C, Favourite, Easy Clean	Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Glass 40 °C, Favourite, Easy Clean	Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Favourite, Easy Clean	Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Favourite, Easy Clean	Eco 50 °C, Auto 45-65 °C, Chef 70 °C, 1h 65 °C, Favourite, Easy Clean
Remote Start, Extra Dry, Power Zone, Extra Speed	Remote Start, Extra Dry, Power Zone, Extra Speed	Remote Start, Extra Dry, Power Zone, Extra Speed	Remote Start, Extra Dry, Power Zone, Extra Speed	Remote Start, Extra Dry, Power Zone, Extra Speed	Remote Start, Extra Dry, Power Zone, Extra Speed
Eco 50 ℃	Eco 50 ℃	Eco 50 ℃	Eco 50 °C	Eco 50 °C	Eco 50 °C
å D →	E D	<u>E</u>	₫ D	å D ∕	₹ E
85 / 9.5	84 / 9.5	94 / 9.5	85 / 9.5	84 / 9.5	92 / 10.5
14	13	13	14	13	12
4:55	4:55	3:45	4:55	4:55	4:30
46	46	46	48	48	48
С	С	С	С	С	С
175	175	175	175	175	175
165 / 190	165 / 190	165 / 190	165 / 190	165 / 190	165 / 190
875	875	875	875	875	875
60	60	60	60	60	60
600	600	600	600	600	600
815	815	815	815	815	815
598 / 550	598 / 550	598 / 550	598 / 550	598 / 550	598 / 550
35/38	35/38	35/38	44 / 46	44 / 46	35/38
•	•	•	•	•	•
50	50	50	50	50	50
60 Staiplass staal	60 Stainless steel	60 Stainless steel / Poliney	60 Staipless steel	60 Stainless steel	60 Stainless steel / Poliney
Stainless steel Large item spray head,	Stainless steel Large item spray head, including Steam protection	Stainless steel / Polinox Large item spray head, including Steam protection	Stainless steel Large item spray head,	Stainless steel Large item spray head, including Steam protection	Stainless steel / Polinox Large item spray head, including Steam protection
including Steam protection plate	plate	including Steam protection plate	including Steam protection plate	plate	plate

All of our dishwashers have Aqua Stop water protection, detergent aware, Dosage Assist and a door lock as standard. All NEFF dishwashers are suitable for use with doors from 2.5kg-8.5kg apart from SlimLine S875HKX20G (2.5kg to 7.5kg) and VarioHinge models S195HCX26G and S295HCX26G (4.5kg to 11.0kg) if the correct door springs are installed.



Flexible solutions for your bulkiest cookware

Offering easy access to a front control panel and seamlessly blending in with your furniture, our semi-integrated dishwashers are a popular choice in kitchen design.

S145ITS04G



buttons







DESIGN/PERFORMANCE

















Height (cm) / Hinge Type

Design Features

Home Connect WiFi connectivity

Control panel type

Flex Cutlery Drawer (3rd loading level)

Status indicator

Door open assist

Anti-slip protection and stemware support upper basket

Adjustable upper basket

Number of flip tines in upper / lower basket

Cup shelves upper / lower baskets

Cutlery holder lower basket

Largest loadable dish upper / lower basket (cm)

Real-time clock

Emotion light (interior lighting)

End of cycle indicator

Salt / Rinse aid light indicator

Self cleaning filter system

Safety features

PROGRAMMES / FUNCTIONS

List of programmes

Additional special options

TECHNICAL SPECIFICATIONS

Reference programme for measurements

Energy efficiency class¹

Energy² / water³ : kWh / litres

Load capacity (place settings) Programme duration⁴: h:min

Noise level: dB (A) re 1 pW Noise efficiency class

Noise level (silence programme): dB (A) re 1 pW

Length of electrical supply cord (cm)

Length inlet / outlet hose (cm) Maximum height for installation (mm)

Maximum height adjustability feet (mm)

Maximum width for installation (mm) Height of the product (mm)

Width / Depth of the product (mm)

Net weight / Gross weight (kg)

Maximum accepted water hardness (°DH)

Maximum temperature for water intake (°C)



60CM SEMI-INTEGRATED

Stainless steel 81.5 / Fixed

Inherent heat

Push buttons + LED

Height adjustable top basket

AquaStop

Control panel lock, door lock


Eco 50 °C, Auto 45-65 °C, Chef 70 °C, 1h 65 °C, Favourite, Easy Clean

Remote Start, Extra Dry, Power Zone, Extra Speed

Eco 50 ℃	
₹ E	
92 / 10.5	
12	
4:30	
48	
С	
175	
165 / 190	
875	
60	
600	
815	
598 / 573	
33 / 35	

Stainless steel / Polinox

Large item spray head,









SLIMLINE DISHWASHER



Now every kitchen can benefit from a dishwasher

Our SlimLine dishwasher is ideal for cooks who need the convenience of a dishwasher without impacting on valuable kitchen space. Incorporating a range of innovative NEFF features such as Chef 70°, Extra Speed, Info Light and Vario Hinge, a smaller dishwasher doesn't mean you have to sacrifice performance.



N 50









DESIGN/PERFORMANCE





















Info Light





er pressure require city to % screwed joint. valid in this table as of April 2021. Subject to modification without prior notice.



Height (cm) / Hinge Type

Design Features

Drying system Home Connect WiFi connectivity

Control panel type

Flex Cutlery Drawer (3rd loading level)

Status indicator

Door open assist

Anti-slip protection and stemware support upper basket

Adjustable upper basket

Number of flip tines in upper / lower basket

Cup shelves upper / lower baskets

Cutlery holder lower basket

Largest loadable dish upper / lower basket (cm)

Load / Aqua sensor

Real-time clock Start delay time max hours

Emotion light (interior lighting)

End of cycle indicator

Salt / Rinse aid light indicator

Self cleaning filter system

Safety features

PROGRAMMES / FUNCTIONS

List of programmes

Additional special options

TECHNICAL SPECIFICATIONS Reference programme for measurements

Energy efficiency class¹

Energy² / water³ : kWh / litres Load capacity (place settings)

Programme duration⁴: h:min

Noise level: dB (A) re 1 pW

Noise efficiency class

Noise level (silence programme): dB (A) re 1 pW

Length of electrical supply cord (cm)

Length inlet / outlet hose (cm)

Maximum height for installation (mm)

Maximum height adjustability feet (mm)

Maximum width for installation (mm)

Height of the product (mm) Width / Depth of the product (mm)

Net weight / Gross weight (kg)

Maximum accepted water hardness (°DH)

Maximum temperature for water intake (°C)



45CM FULLY INTEGRATED

Stainless steel 81.5 / Vario Hinge

Heat exchanger

Push buttons + LED

Info Light (red)

Height adjustable top basket

27/31

Acoustic •/•

AquaStop

Door lock

Eco 50 °C, Auto 45-65 °C, Chef 70 °C, Classic 60 °C, Glass 40 °C, Favourite, Easy Clean

Remote Start, Extra Dry, Power Zone, Extra Speed

Eco 50 ℃	
A E	
70 / 8.5	
9	
3:40	
46	
С	
175	
165 / 205	
875	
60	
450	
815	
448 / 550	
28/30	
•	
50	

60

Stainless steel Large item spray head,





LAUNDRY



Quality, performance and efficiency are standard on all our laundry appliances

A good laundry appliance should be reliable enough to provide perfect results again and again. We have three types of model to cover all your laundry needs: washing machines, washer dryer combination models and tumble dryers. All feature our signature innovations, designed to improve efficiency and, most importantly, to make life easier.



Our washing machines are so quiet it won't drown out your conversation. We have also added the innovative **Time Light** feature so you can see when your washing will be finished even when the furniture door is closed. A perfect solution for open plan kitchens. Featured on model W544BX1GB (shown).

Image shown for marketing purposes only.

LAUNDRY APPLIANCE FEATURES



LESS IRONING

Reduces the creasing of clothes as the water is gently removed from the wash with a light interval spin at the end of the cycle.

TIME DELAY

Allows you to programme the machine up to 24 hours in advance to suit any schedule or to take advantage of off-peak electricity rates.

TIME LIGHT

The time remaining of the wash cycle is clearly projected on to any floor surface. So you don't have to open the door to see when your washing will be finished. Perfect for open plan kitchens. Featured on model W544BX1GB.

FLEXI TIME

Cuts programme times by up to 30%. Simply select the cycle you wish to run and then select Flexi Time.

EXTRA RINSE OPTION

Available on almost every programme, it's especially helpful for sensitive skin.

INTELLIGENT WATER SYSTEM

Efficient washing is made simple with our built-in load sensor. With up to 256 load levels distinguished and a flow sensor for detecting the kind of textile, the amount of water used is tailored to your wash.

STAIN-REMOVAL PROGRAMME

Banish even the most stubborn stains with our stain-specific programmes. With dedicated settings for red wine spillages, tomato splashes and butter/oil residue, there's no need to worry about cooking-related stains.

DRUM CLEAN WITH REMINDER

Prevent odours and germs with our handy Drum Clean reminder. When the machine detects a consecutive number of low washing temperatures ($<40^\circ$), you'll be prompted to start the Drum Clean programme.

Some features are relevant for freestanding models only. For full details please refer to the website.

ANTI-VIBRATION SIDE PANELS

Our new side panels increase stability and reduce vibrations during even the fastest spin cycle. With a 3-step system which absorbs motor vibrations, centres unbalanced laundry and compensates for vibrations on the side walls, you benefit from low noise washing with every load.

SENSOR DRYING

Continuously monitors the drying performance using sophisticated sensors to prevent overheating and over drying. The dryer stops automatically when the correct level of dryness is reached to deliver the finest fabric care and reduce ironing.

ECO BAR / ECO BAR PLUS

Know how much energy you are using with the new Eco Bar feature, available on selected freestanding appliances. The LED bar displays five possible consumption levels. With Eco Bar Plus, energy and water consumption is displayed, giving you an indication of resources used on your chosen programme and options. The fewer LEDs illuminated, the more energy you are saving

AQUA STOP / AQUA SECURE PLUS

Protects inlet hoses from leakage. A safety valve, prevents any more water from entering the washing machine.

DRUM LIGHT

The new drum interior LED light is a big help when unloading your fully-integrated NEFF built-in washing machine. It lights up the inside brightly enough so you'll never overlook another item of laundry.

RELOAD FUNCTION

If you need to add or remove an item after the programme has started, you can pause the cycle by pressing the Start/Reload button. The machine will check whether you can open the door and, if so, it lets you. To resume operation, just press the Start/Reload button again.

INTEGRATED LAUNDRY

Designed to blend seamlessly with the rest of your kitchen.

Discreet and unobtrusive, our built-in washing machines and washer dryers remain hidden behind cabinet doors in the kitchen, maintaining a clean and coordinated look.

QUALITY PERFORMANCE AND EFFICIENCY

W544BX1GB



Large Touch Control

Eco Silence Drive and Anti Vibration panels

LED drum light

Time Light

8kg capacity

ULTIMATE SPACE SAVING SOLUTION

Our machines are easy to fit, slotting in neatly between two units. access to the pump and vent) should be fitted across the bottom.











(1) (1) (1)			
MODEL NO.		V6540X2GB	V6320X2GE
		WASHER DRYER	WASHER DRYE
KEY FEATURES			
Electronic control dial		•	•
Time selection options		•	•
Sensor controlled drying		•	
ADDITIONAL FEATURES			
Time delay	h	24	19
Control panel lock		•	•
Water protection system		Aqua Stop	Aqua Secure
STANDARD PROGRAMMES			
Cottons		•	•
Eco 40-60		•	•
Easy-care programme		•	•
Wool programme		•	•
Delicates / Silk		•	•
Intensive dry		•	•
Gentle dry		•	•
ADDITIONAL PROGRAMMES			
Super Quick 15'		•	
Reduced noise wash		•	
Sportswear		•	
Mixed load		•	
Fluff removal programme		•	•
OPTIONS			
Flexi Time		•	•
Intensive		•	•
Pre-wash		•	•
Extra rinse		•	•
Less ironing		•	•
Variable temperature		•	
Variable spin speed		•	•
PERFORMANCE / TECHNICAL	INFORMATION		
Energy efficiency class washii and drying ¹		A E	A↑E
Energy efficiency class washi	ng²	ā E	A E
Energy ³ / Water ⁴ washing and drying	kWh / litres	266 / 68	266 / 68
Energy ⁵ / Water ⁶ washing	kWh / litres	77 / 44	77 / 44
Load capacity washing and drying / washing	kg	1-4 / 1-7	1-4 / 1-7
Programme duration ⁷ washing and drying / washing	g h:mm	5:30 / 2:50	5:30 / 2:50
Spin efficiency class		В	В
Spin speed ⁸	грт	1400	1400
Noise level	dB(A) re 1 pW	72	72
Noise emission class		А	А
Dimensions of the product $h \times w \times d$ (inc.hinge and 20mn	m door) mm	820 x 595 x 560 (584)	820 x 595 x 56 (584)
Door opening angle		95°	95°
Depth with open door 90°	mm	960	960
Height adjustability	mm	15	15
Length of electrical supply co	rd cm	220	220

Length of supply hose / drain hose

200 / 200

A full height furniture door has to be fitted to the front of our built-in machines and can be hinged from the left or right, but remember, the porthole door on the machine cannot be changed around. A plinth, which is easy to remove or cut out (to allow

DESIGN/PERFORMANCE

FREESTANDING LAUNDRY



Designed with utility rooms in mind

FREESTANDING WASHING MACHINES





W946UX0GB Freestanding Washing Machine



DESIGN/PERFORMANCE





W7460X5GB Freestanding Washing Machine



DESIGN/PERFORMANCE







EcoBar / EcoBar ADDITIONAL FFATURE Eco 40-60 Delicates / Sill Mixed load Reduced ironing Pre Wash Drum Clean Dimensions of the product 848 x 598 x 590 (632) 845 x 598 x 590 (633) $h \times w \times d$ (inc. door porthole)

FREESTANDING WASHER DRYER & FREESTANDING CONDENSER TUMBLE DRYER





VNA341U8GB Freestanding Washer Dryer



DESIGN/PERFORMANCE







R8580X3GB Freestanding Tumble Dryer



DESIGN/PERFORMANCE




יוכ	JIN/ I L
gy	9kg


MODEL NO.		VNA341U8GB		R858UX3GB	
		WASHER DRYER		TUMBLE DRYER	
KEY FEATURES					
AutoDry - Sensor Drying		•		•	
Anti Vibration design		•		•	
Anti Crease cycle	mins			120	
Reload facility		•		•	
ADDITIONAL FEATURES		0.1			
Fime delay	h	24	题	•	
Control panel lock		•			
nterior drum light Water protection system		Agua Secure			
PROGRAMMES / FUNCTIONS		Aqua secure			
Eco 40-60		•			
Cottons		•	88	•	
Refresh		•			
Easy-care programme		•		•	
Mixed load		•		•	
Delicates / Silk		•			
Wool programme		•		•	
Red wine		•			
Rapid 15' / Wash & Dry 60'		•			
ntensive Dry		•	82		
Gentle Dry		•			
My time Dry		•			
Prewash		•			
Easy Iron		•			
SpeedPerfect		•			
/ariable temperature / Variable spin		•			
Sportswear					
AllergyPlus			86		
Shirts 15'					
Rapid 40' Down					
Fimed programme - Warm					
Fimed programme - Cold					
Reduced ironing				•	
PERFORMANCE / TECHNICAL INFO	RMATION				
Energy efficiency class washing and drying ¹		A E	S		
Energy efficiency class washing ²		A C	Ø		
Energy efficiency class drying			8	В	
Energy³ / Water⁴ washing and drying	kWh/L	313 / 70	Ĭ,		
Energy ⁵ / Water ⁶ washing	kWh/L	63 / 41			
Load capacity washing and drying / washing	kg	1-5/1-8	ķ		
Programme duration ⁷ washing and drying / washing	h:mm	7:30 / 3:32			
Spin efficiency class		В	2)		
Spin speed ⁸	rpm	1400			
Capacity cotton	kg			9	
Ambient temperature range	°C	70		5-35°C	
Noise level	dB(A) re 1 pW	70		65	
Noise efficiency class		A		942 v E00 v E00	
Dimensions of the product n x w x d (inc. door porthole)	mm	848 x 598 x 590 (635)		842 x 598 x 599 (652)	
Depth with door open 90°	mm	1073		1091	
Door opening angle		165°	ķ.	175°	
Door hinge position		Left-hand		Right-hand	
THE PARTY NAMED IN	Res a sa	F 63368		5684 1 30	
				THE RESERVE AND ADDRESS OF THE PARTY OF THE	



SLIDE&HIDE® PYROLYTIC OVENS WITH VARIO STEAM


B58VT68H0B, B57VS24H0B, B57VR22N0B (models with VarioSteam®) B5AVM7HH0B, B5AVH6AH0B (models with added steam)







Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.









SLIDE&HIDE® SINGLE OVENS WITH FULL STEAM

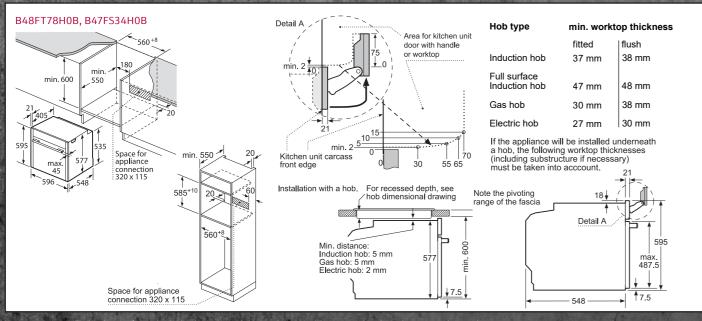


SLIDE&HIDE® PYROLYTIC OVENS WITH ADDED CLEANING

B58CT68H0B, B57CR22N0B









Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into acccount.

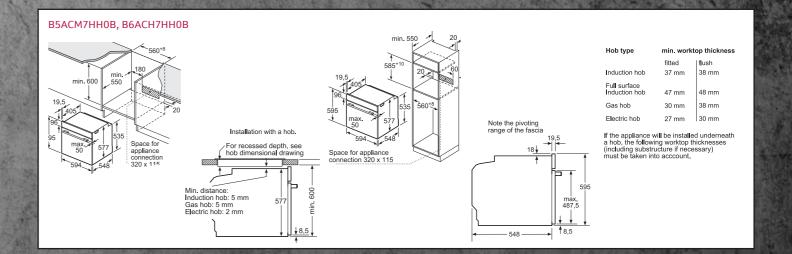


SLIDE&HIDE® SINGLE OVENS WITH VARIO STEAM®

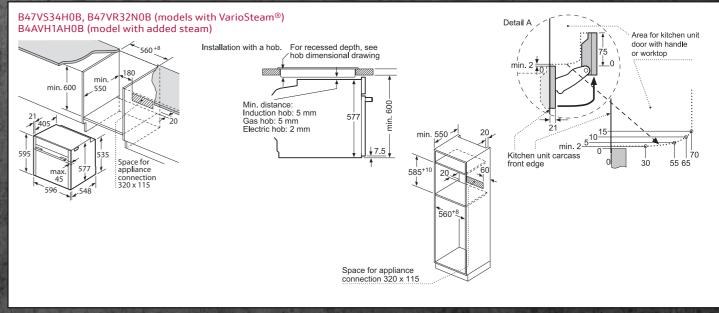



Measurements in mm. The line drawings featured in this brochure are provided as a guide to general dimensions only and are subject to amendment without prior no


SLIDE&HIDE® SINGLE OVENS

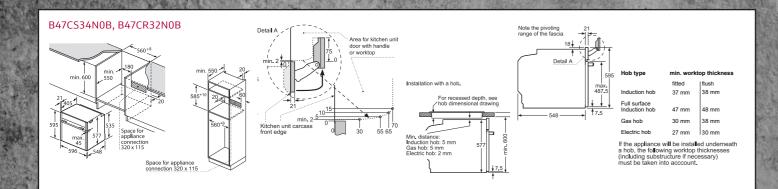


B4ACM5HH0B, B4ACF1AN0B, B3ACE4HN0B












Hob type	min. worktop thickness		
	fitted	flush	
Induction hob	37 mm	38 mm	
Full surface Induction hob	47 mm	48 mm	
Gas hob	30 mm	38 mm	
Electric hob	27 mm	30 mm	

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.



SLIDE&HIDE® PYROLYTIC OVENS

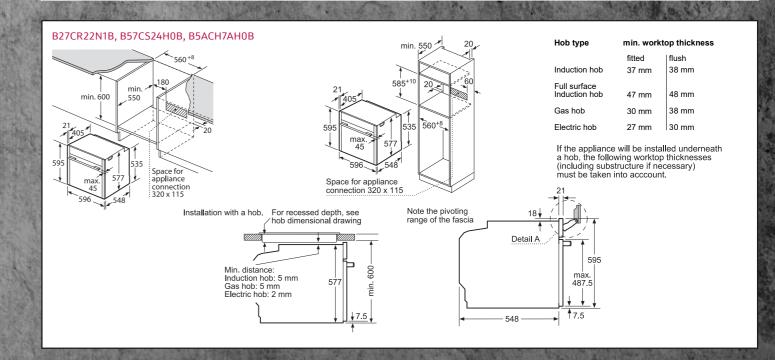


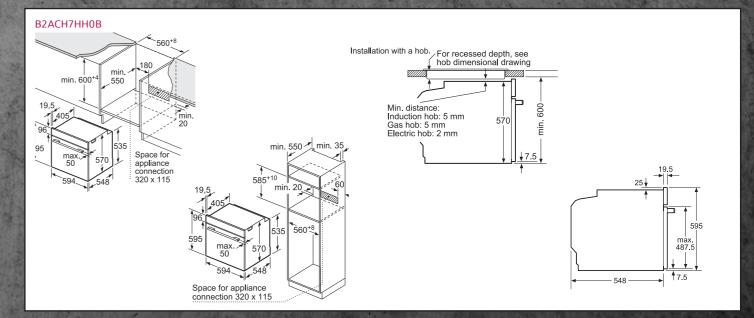


Measurements in mm. The line drawings featured in this brochure are provided as a guide to general dimensions only and are subject to amendment without prior not

For full dimensional and installation details please refer to the documentation supp

SINGLE OVENS

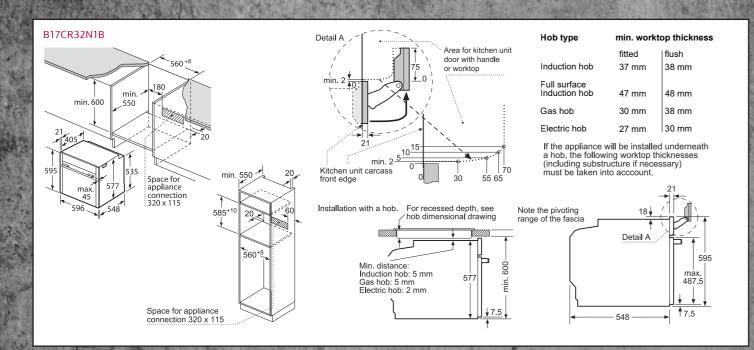


B1ACE4HN0B, B1ACE4HW0B

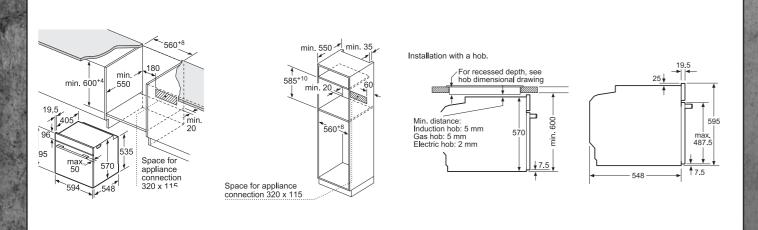




COMPACT OVENS WITH FULL STEAM

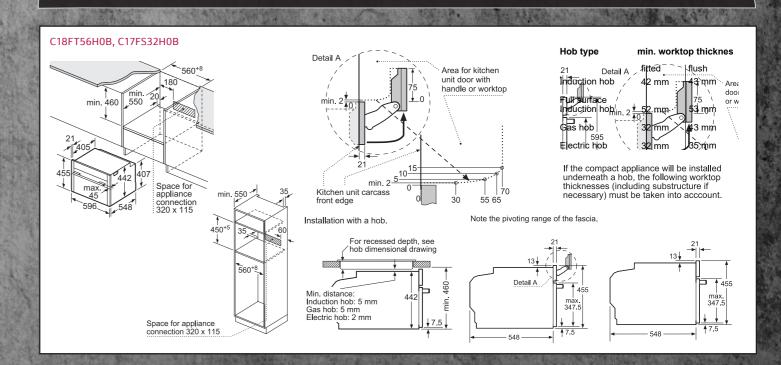


COMPACT OVENS

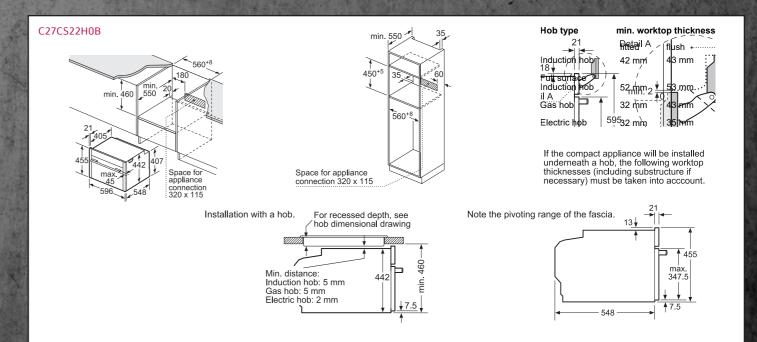



COMPACT OVENS WITH MICROWAVE & MICROWAVE **COMBINATION OVENS**


SAME THANKS OF THE STATE OF THE

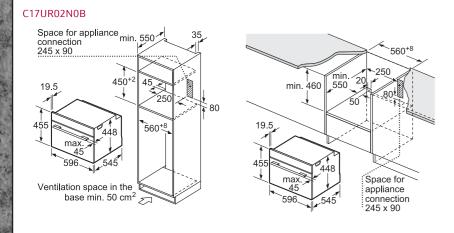

C28MT27H0B, C27MS22H0B, C17MS32H0B, C17MR02N0B

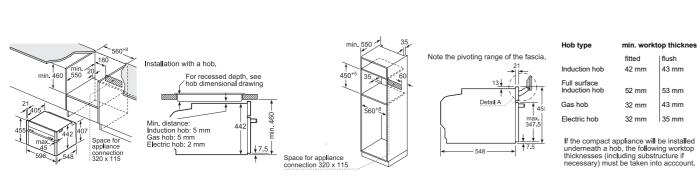

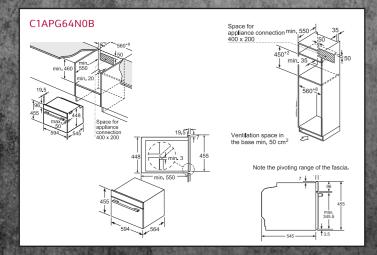

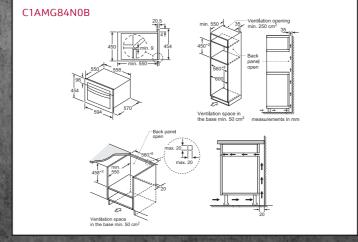



43 mm


35 mm

MICROWAVE OVENS

C17GR00N0B, C17GR01N0B, C17WR00N0B, C17WR01N0B Overhang at top: Recess 362 = 6 mm Recess 365** = 3** mm min. 300 362-365 ←min. 300→ 14 Overhang at bottom: 14 mm Back panel open

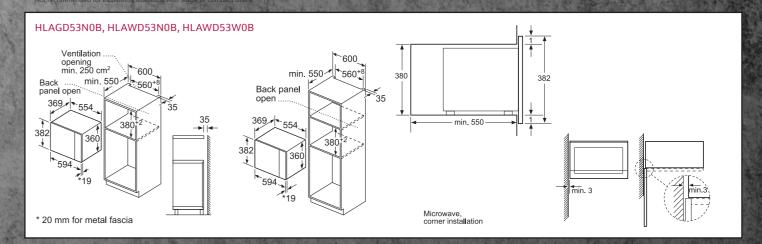


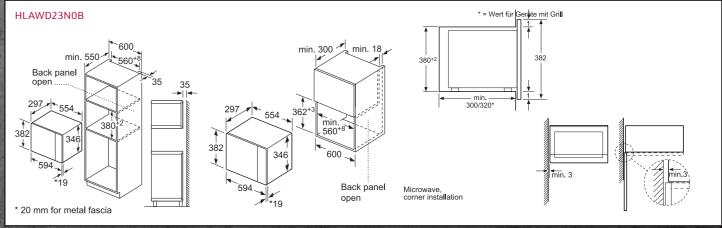


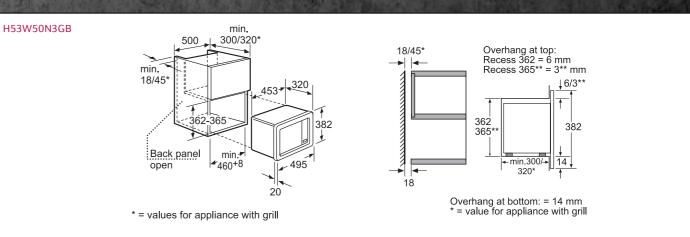

WARMING DRAWERS


N17HH20N0B






Ovens with an appliance height of 595 mm can be installed above a warming drawer.
An intermediate floor is not required.

N17HH10N0B, N17HH11N0B, N17ZH10N0







Compact ovens with an appliance height of 455 mm can be installed above a warming drawer.

An intermediate floor is not required.


N17XH10N0






Compact ovens with an appliance height of 455 mm can be installed above a warming drawer.
An intermediate floor is not required.


N1AHA02N0B






Ovens with an appliance height of 595 mm can be installed above a warming drawer. An intermediate floor is not required.

N1AHA01N0B







Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

DOUBLE OVENS

U2ACM7HH0B, U1ACI5HN0B, U1ACE5HN0B, U1ACE2HN0B, U1ACE2HW0B



J1ACE4HN0B, J1ACE2HN0B



If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness			
	fitted	flush		
Induction hob	39 mm	40 mm		
Full surface induction hob	49 mm	50 mm		
Gas hob	29 mm	36 mm		
Electric hob	29 mm	32 mm		


COFFEE MACHINE

C17KS61H0

Left corner installation


min. 350







Bean and water containers are removed from the front.
Recommended installation height 95-145cm.


VENTING HOBS

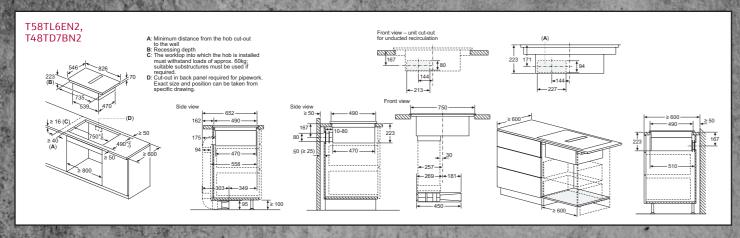

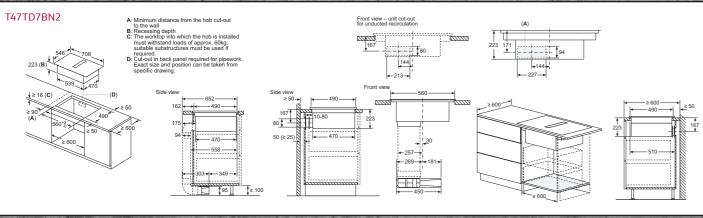

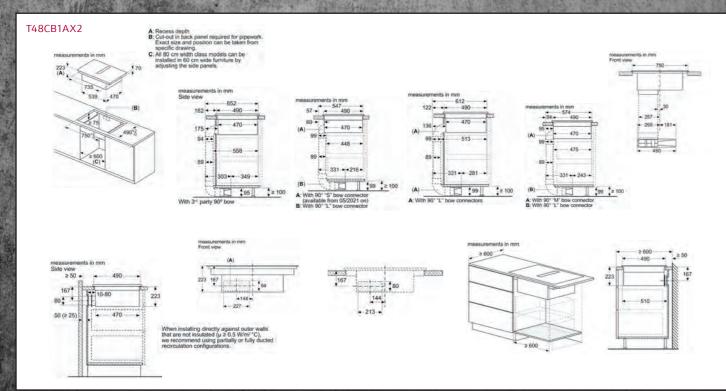

VENTING HOBS

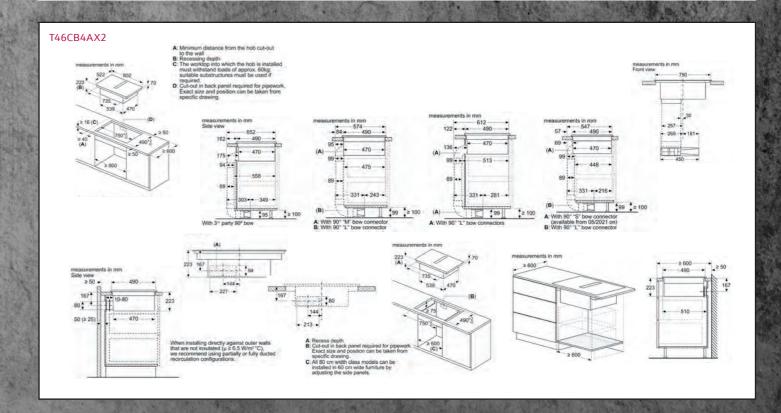

VENTING HOBS INSTALLATION ACCESSORIES

				10.11
DESCRIPTION	UNDUCTED RECIRCULATION	CUSTOMISED PARTLY DUCTED RECIRCULATION	CUSTOMISED FULLY DUCTED RECIRCULATION	DUCTED EXHAUST EXTRACTION
Venting hob installation options and requirements				
	T58TL6EN2	T58TL6EN2	T58TL6EN2	T58TL6EN2
	T48TD7BN2	T48TD7BN2	T48TD7BN2	T48TD7BN2
Venting hobs	T47TD7BN2	T47TD7BN2	T47TD7BN2	T47TD7BN2
	T48CB1AX2	T48CB1AX2	T48CB1AX2	T48CB1AX2
	T46CB4AX2	T46CB4AX2	T46CB4AX2	T46CB4AX2
Required accessory	Z821UD0	Z821PD0	Z821PD0	Z811DU0
Accessory contents	Telescopic 'slider' (self-adhesive, air tight seal) Set of Clean Air Odour Filters (4 in the kit)	1 x Air diffuser Set of Clean Air Odour Filters (4 in the kit) 1 x Adhesive seal	1 x Air diffuser Set of Clean Air Odour Filters (4 in the kit)	Set of Acoustic noise reducing filters (4 in the kit) 1 x Adhesive seal
Additional required accessories (not available from NEFF)	None	Flat ducting elements – to suit flat channel ducting approx 220 x 90mm	Flat ducting elements – to suit flat channel ducting approx 220 x 90mm	Flat ducting elements – to suit flat channel ducting approx 220 x 90mm


VENTING HOBS DUCTING COMPONENTS


STATE OF THE PARTY OF THE PARTY


DESCRIPTION	CODE	MEASUREMENTS (mm)	COMPONENT
Flat channel ducting component, straight length, 100cm long Ducting component outlet size: 222mm x 89mm	Z861SM2	1000	
Flat channel ducting component, straight length, 50cm long Ducting component outlet size: 222mm x 89mm	Z861SM1	100 to 220 to 200 to 20	
Flat channel 90° horizontal bend Ducting component outlet size: 222mm × 89mm	Z861SB1	in in	
Flat channel 90° vertical bend (large Radius), suitable for 70cm worktop depths Ducting component outlet size: 222mm × 89mm	Z861SB2		
Flat channel 90° vertical bend (medium Radius), suitable for 65cm worktop depths Ducting component outlet size: 222mm x 89mm	Z861SB3	and the same of th	
Flat channel 90° vertical bend (short Radius), suitable for 60cm worktop depths Ducting component outlet size: 222mm x 89mm	Z861SB4*	And the state of t	
Connection piece for use between ducting components and bends Ducting component size: 223mm x 90mm	Z861SS1		
Flexible Connection piece for use between ducting components and bends Ducting component size: 223mm x 90mm	Z861SS2*		
Straight Adaptor / Converter flat to round (Ø 150mm) Ducting component outlet size: 222mm × 89mm	Z861SI0	A + 10.5	
90° Adaptor / Converter flat to round (Ø 150mm) Ducting component outlet size: 222 mm x 89mm	Z861SI1		


FLEX INDUCTION HOBS

T59TF6RN0, T59TS61N0, T59TS5RN0











T68TF6RN0, T68TS6RN0, T58TT20N0





- * Minimum distance from the hob cut-out to the wall

 ** Recessed depth


 *** With fitted oven underneath min. 30, possibly more; see space requirements for the oven










T66TS6RN0, T56TT60N0











FLEX INDUCTION HOBS

Factor Thinks Color of the


* Minimum distance from the hob cut-out to the wall Recessed depth ** Recessed depth ** With fitted oven underneath min. 30, possibly more; see space requirements for the oven


T59FT50X0 min. 820 min. 45 min. 20 the hob cut-out to the wall Recessed depth With fitted oven underneath min. 30, possibly more; see space requirements for the oven

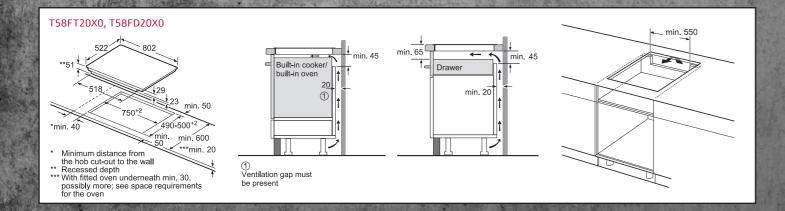


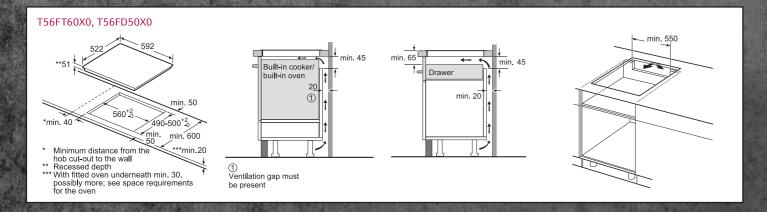

INDUCTION & CERAMIC HOBS

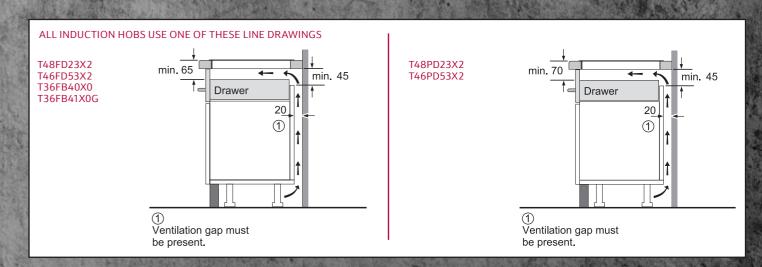


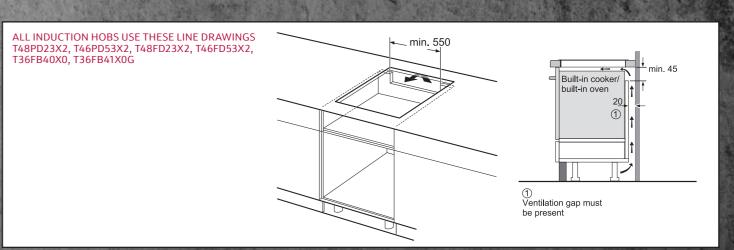

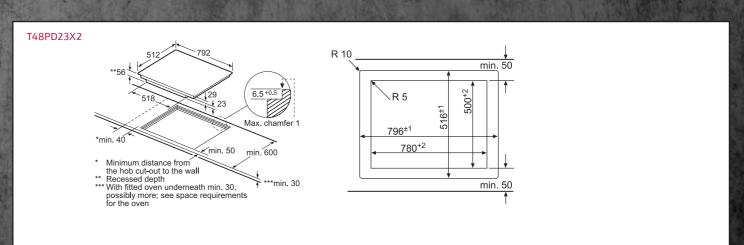


INDUCTION & CERAMIC HOBS

T46PD53X2

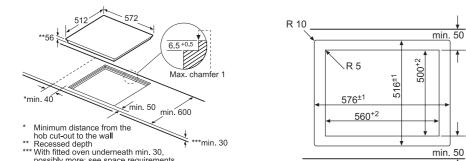

The standard of the second


T48FD23X2

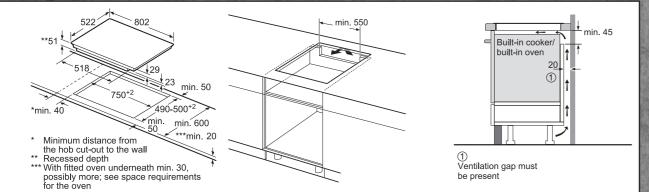


T46FD53X2, T36FB40X0,

*min. 40

T36FB41X0G





hob cut-out to the wall

** Recessed depth

*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven

* Minimum distance from the


490-500⁺²0

min. 600




be present

T18FD36X0




T16FD56X0, T10B40X2, T16FK40X0




DOMINO HOBS


N74TD00N0



600

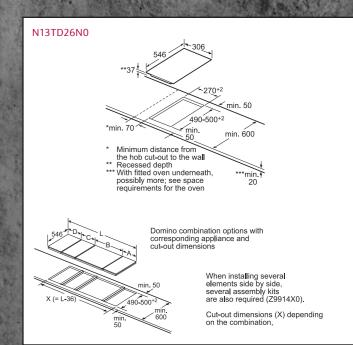


N53TD40N0




Minimum distance from the hob cut-out to the wall
 Recessed depth
 With fitted oven underneath min, 30, possibly more; see space requirements for the oven

corresponding appliance and

Cut-out dimensions (X) depending




Cut-out dimensions (X) depending on the combination



N23TA29N0


** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more;
see space requirements for the oven


N23TA19N0




GAS HOBS


* Minimum distance from the hob cut-out to the wall **Position of gas connection in the cut-out ***With fitted oven underneath, possibly more; see space requirements for the oven










T26CS49S0







GAS HOBS

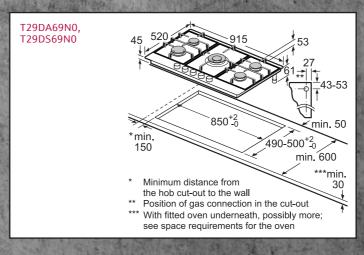


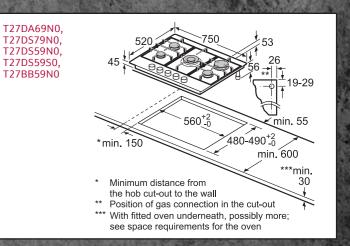

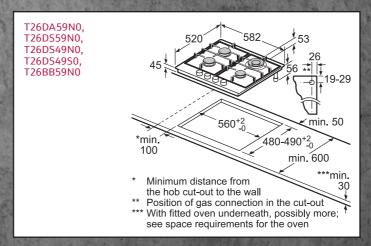




T26BR46N0, T26BR46S0, T26BR46W0




Ventilation gap must be present
* Min. 70 for all induction hobs integrated flush


with surrounding surfaces





WORKTOP INSTALLATION HOODS

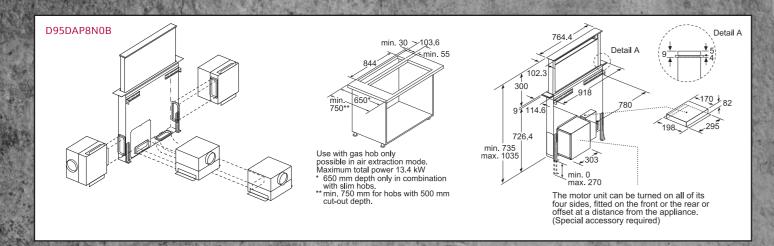

CEILING INSTALLATION HOODS

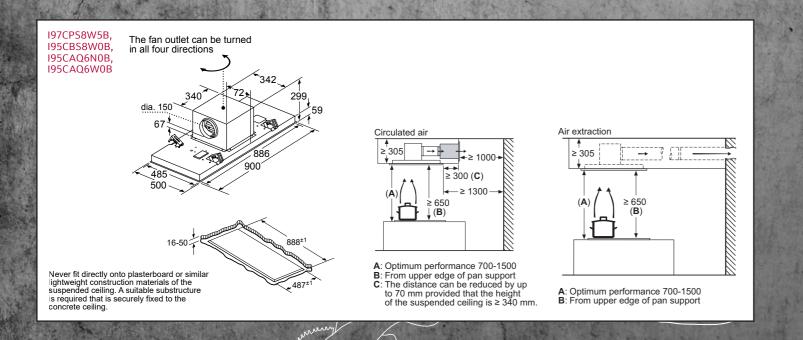


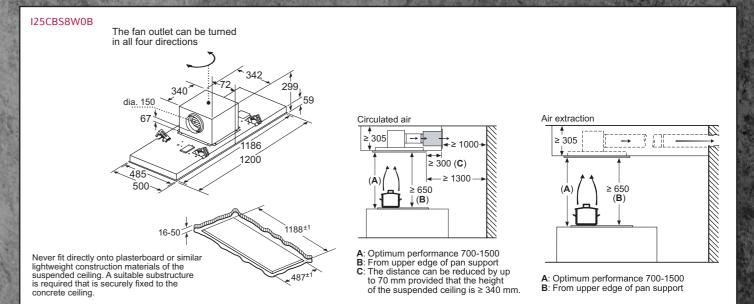

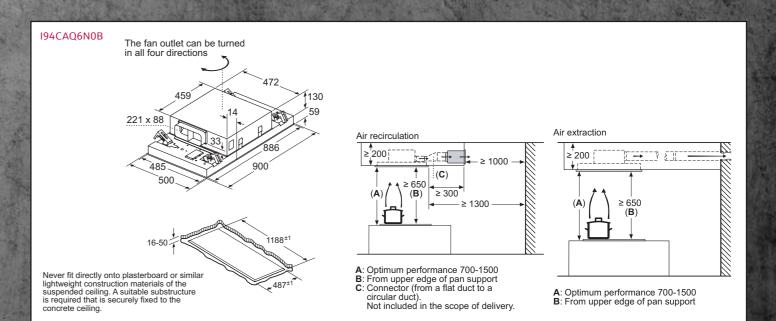



CEILING INSTALLATION HOODS

A: The fan outlet can be turned in all four directions A: If required, even out the ceiling thickness to 13 mm using wooden spacers. Exhaust air Circulated air 2200 A: Optimum performance 700-1500 B: From upper edge of pan support C: Electric D: Gas A: Optimum performance 700-1500 B: From upper edge of pan support C: Electric D: Gas

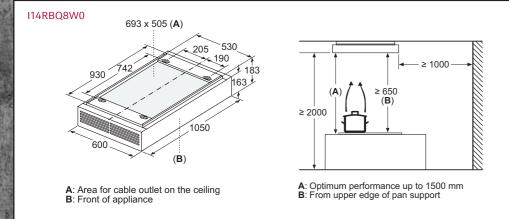



ISLAND HOODS




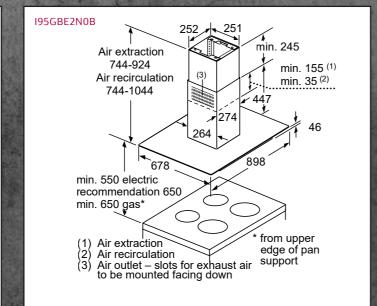


WALL INSTALLATION HOODS

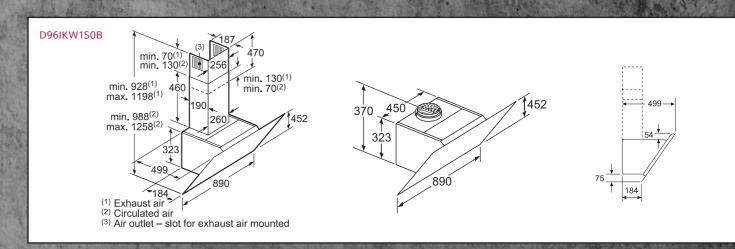


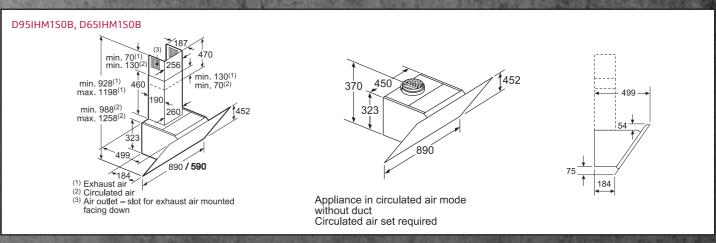


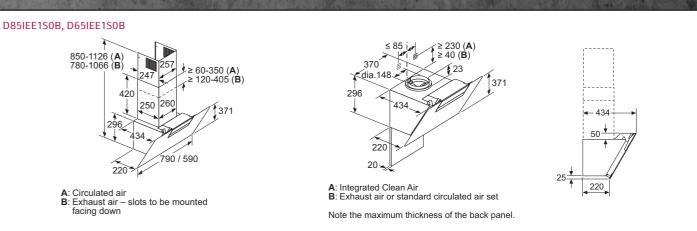


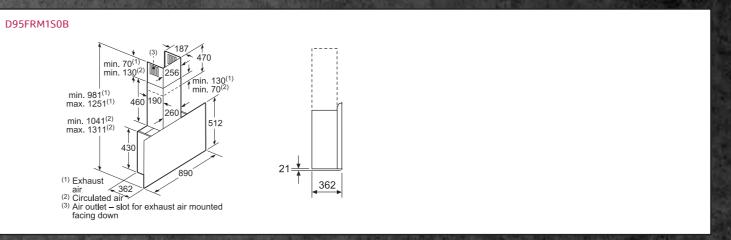



GLASS CHIMNEY HOODS

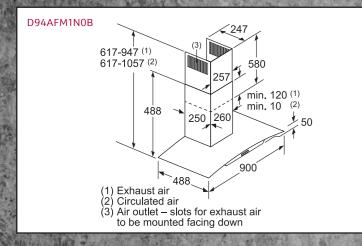





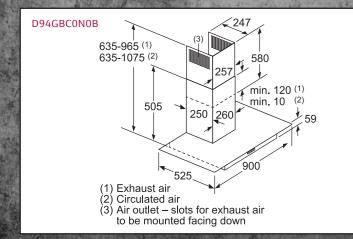




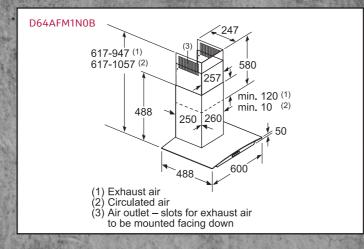





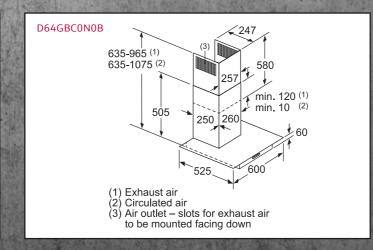





BOX CHIMNEY HOODS

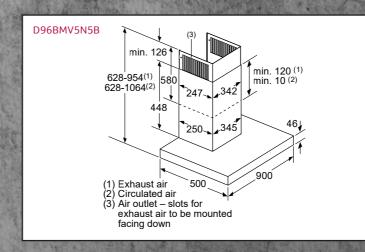

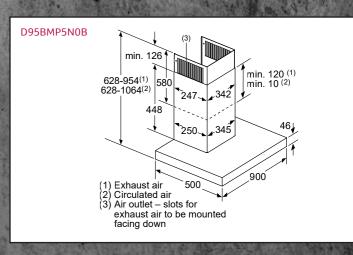










D94BHM1N0B, D92BBC0N0B






the design of the app must be considered.

D64BHM1N0B, D62BBC0N0B








PYRAMID CHIMNEY HOODS


THE THIRD LEADING THE PARTY OF THE PARTY OF

D94QFM1N0B, D92QBC0N0B 676-1006 (1) min. 120 (1) min. 10 (2) from upper edge min. 550/650 electric/gas* min. 550/650 (1) Exhaust air (2) Circulated air (3) Air outlet – slots for exhaust air to be mounted facing down If a back panel is used, the design of the appliance must be considered.

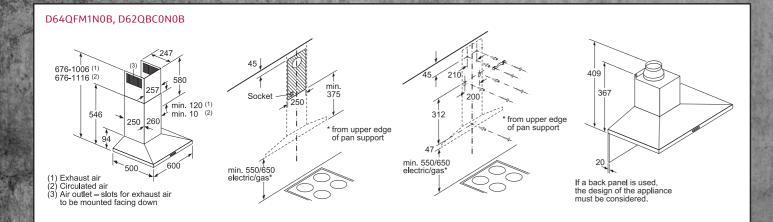









D92PBC0N0B, D72PBC0N0B, D62PBC0N0B


A: Socket
B: Exhaust air: ≥ 280; circulated air: ≥ 490
C: electric
D: Gas, from upper edge of pan support

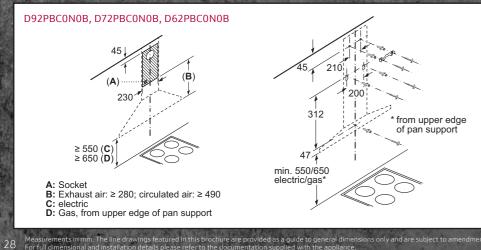




TELESCOPIC HOODS


D49PU54X1B







90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, the mounting kit is required. The two mounting brackets are screwed onto the right and left of the kitchen unit. Installation in


D49ML54N1B







D46ML54N1B





D49ED22N1B







Depth of the filter drawer can be adjusted by up to 29 mm


TELESCOPIC HOODS


D46ED22N1B






D46BR22N1B







CANOPY HOODS


D57ML67N1B, D57MH56N0B

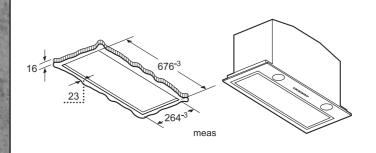








D55MH56N0B










D94XAF8N0B









D64XAF8N0B










Measurements in mm. The line drawings featured in this brochure are provided as a guide to general dimensions only and are subject to amendment without prior not


CANOPY HOODS

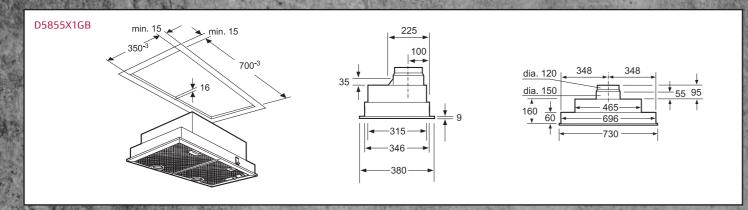

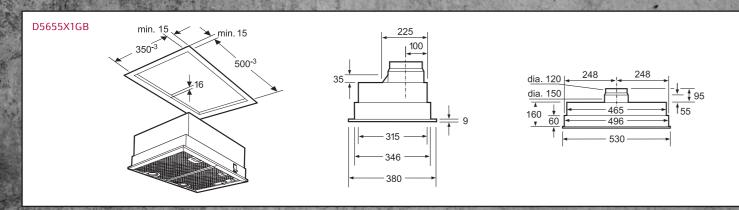


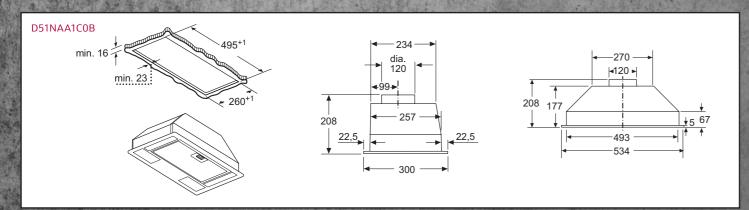


INTEGRATED HOODS

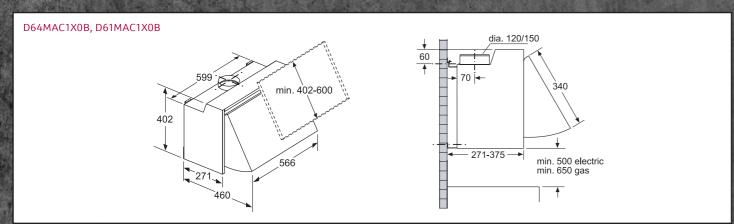


WINE COOLERS

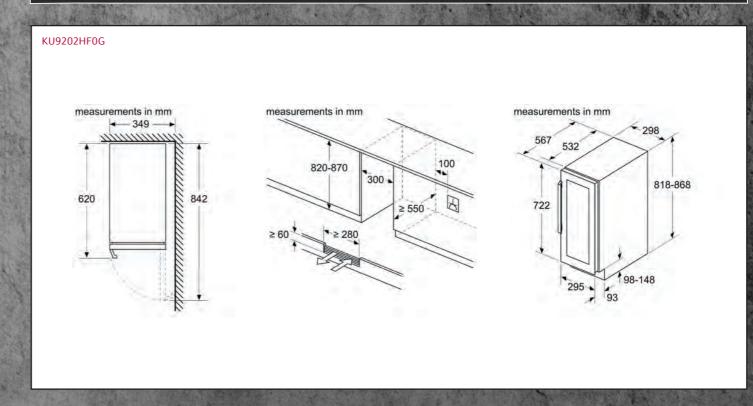

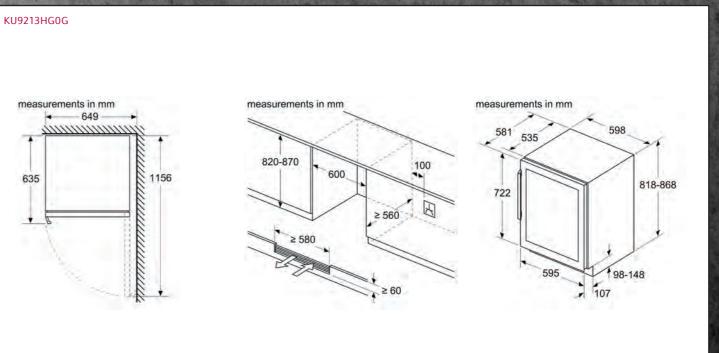


AMERICAN-STYLE FRIDGE FREEZER

KA3923IE0G





	Specifications
4	Front is adjustable from 1783 to 1792
3	Cabinet depth
)	Depth incl. door, without handle
)	Depth incl. door, with handle
_	




BUILT-IN FRIDGE FREEZERS

KI8865DE0, KI7863DF0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI7853DE0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI7862FF0G, KI6863FE0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI7862SF0G






The specified unit door dimensions are valid for a door gap of 4 mm.




4. Resourcements in mm. The line drawings featured in this brochure are provided as a guide to general dimensions only and are subject to amendment without prior notice


BUILT-IN FRIDGE FREEZERS

KI6873FE0G,







The specified unit door dimensions are valid for a door gap of 4 mm.




KI5852FF0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI5852SF0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI5871SF0G







The specified unit door dimensions are valid for a door gap of 4 mm.




KI5872FE0G





The specified unit door dimensions are valid for a door gap of 4 mm.



KI5872SE0G










The specified unit door dimensions are valid for a door gap of 4 mm.

KI5862SE0G









The specified unit door dimensions are valid for a door gap of 4 mm. measurements in mm


BUILT-IN SINGLE DOOR FRIDGES & FREEZERS


177CM KI8816DE0, KI2823FF0G, KI1813FE0G, GI7815CE0G, GI7813EF0G min. 40 B Front panel overhang Air outlet min. 200 cm min. 200 cm The panel overhang of front panel overhang overh

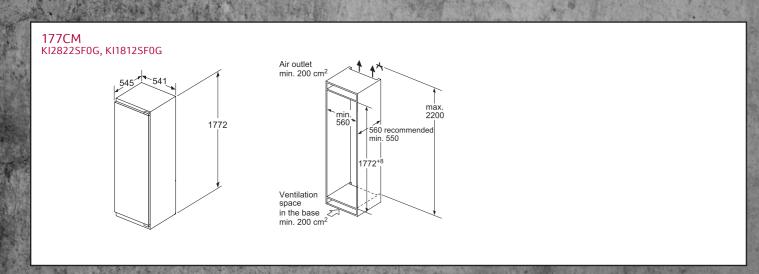


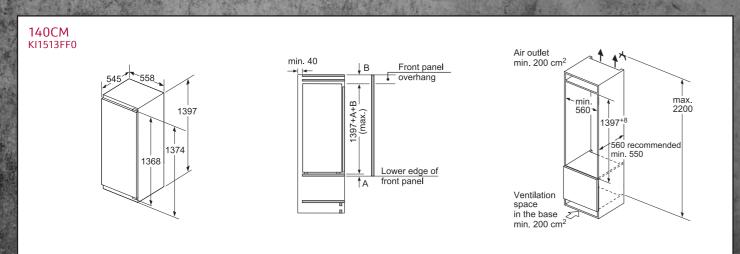


BUILT-IN SINGLE DOOR FRIDGES & FREEZERS

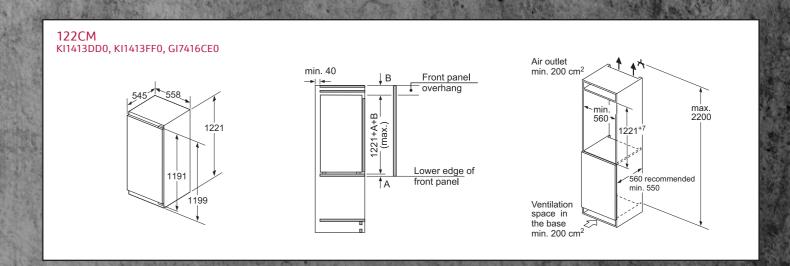

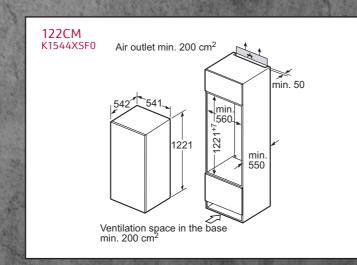


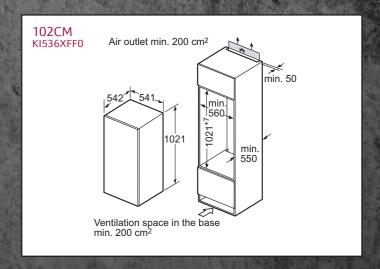

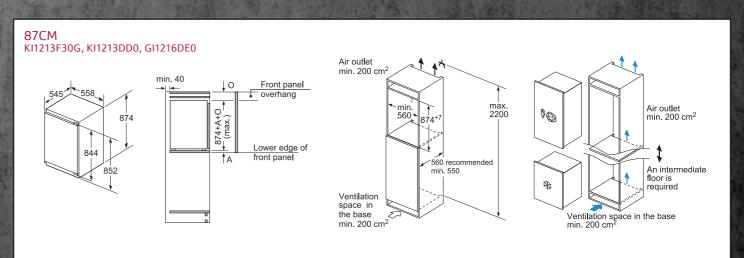


BUILT-IN SINGLE DOOR FRIDGES & FREEZERS

87CM KI514XF0G, GI624SE0G Air outlet min. 200 cm² Ventilation space in the base min. 200 cm² Ventilation space in the base min. 200 cm²

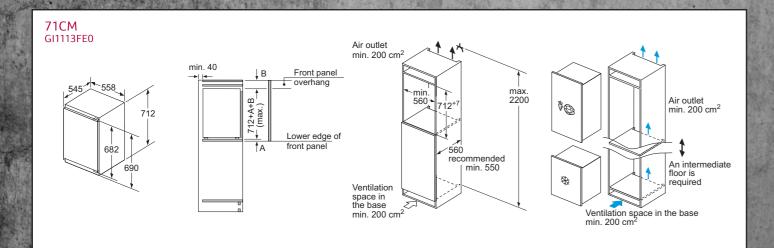

BUILT-UNDER SINGLE DOOR FRIDGE & FREEZERS


K4336XFF0G, K4316XFF0G, G4344XFF0G





* Variable base/ substructure height


Space for electrical connection next to the appliance on the left or right-hand side. Ventilation space in the base.


FULLY INTEGRATED DISHWASHERS

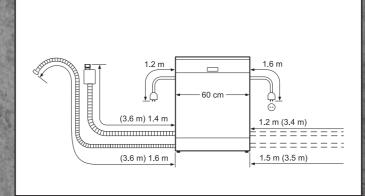








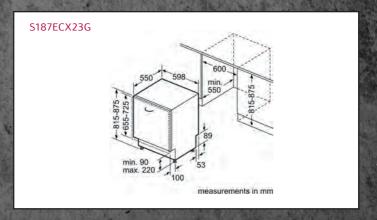




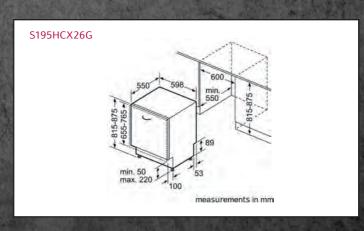








FULLY INTEGRATED DISHWASHERS

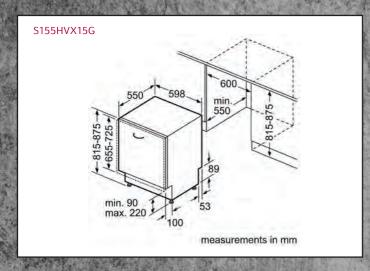


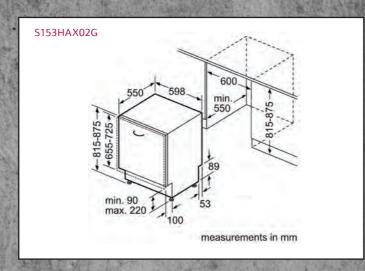

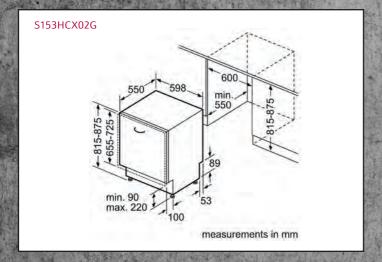




SLIM LINE DISHWASHERS

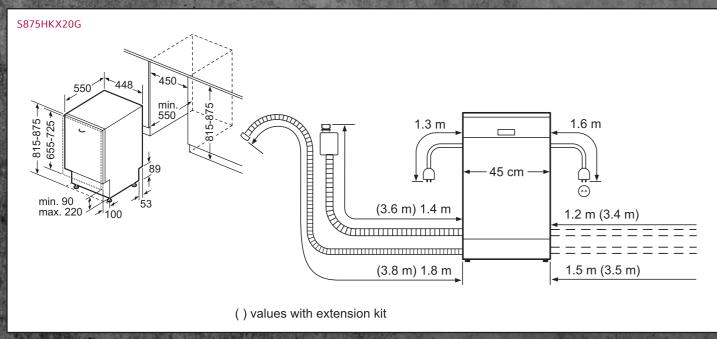


SEMI-INTEGRATED DISHWASHERS

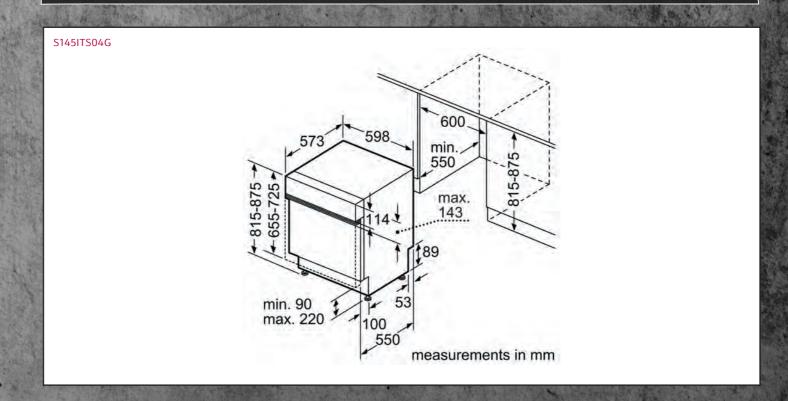

DISHWASHER ACCESSORIES


MODEL NO.		S189YCX01E	S187ZCX43G	S187ECX23G	S295HCX26G	S195HCX26G	S155HCX27G	S155HAX27G	S155HVX15G	S153HCX02G	S153HAX02G	S153ITX05G	S145ITS04G	S875HKX20G
Aqua stop extension	Z7710X0	•	•	•	•	•	•	•	•	•	•	•	•	•
Decor strip – For 60cm Polinox base models, 81.5cm height	Z7861X1								•			•	•	•
Decor strip – For 60cm and 45cm Stainless Steel base models, 81.5cm height	Z7860X0	•	•	•		•	•	•		•	•			
Decor strip – For 60cm Stainless Steel base models, 86.5cm height	Z7861X0				•									
Decor strip – For 60cm Stainless Steel base models installed off the ground, 81.5cm height	Z7860X3	•	•	•		•	•	•		•	•			
Decor strip – For 60cm Stainless Steel base models installed off the ground, 86.5cm height	Z7861X3				•									
Adjustable cutlery basket	Z7863X0	•	•	•	•	•	•		•	•				
Rack insert for stemware dishwasher	Z7863X1	•	•	•	•	•	•	•	•	•	•	•	•	
Stainless steel door and plinth panel	Z7863X2												•	
Wine glass holder accessory (Glass secure tray)	Z7863X8		•	•		•	•	•			•	•		
Door attachment – brushed steel	Z7865X6	•	•	•			•	•	•		•	•		
Silver polishing cassette – 60cm dishwashers	Z7871X0	•	•	•	•	•	•	•	•		•	•	•	
Silver polishing cassette – 45cm dishwashers	Z7871X1													•
Drop hinge for tall cabinets	Z7880X0	•	•	•			•	•	•	•	•	•	•	


INTEGRATED LAUNDRY

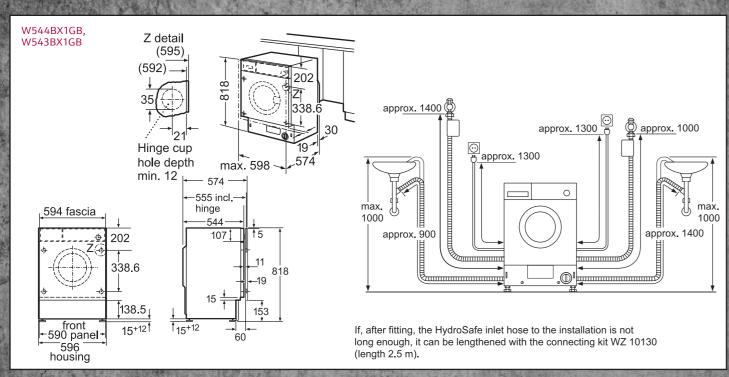



V6540X2GB, V6320X2GB Z detail Hinge cup hole depth 13 approx. 1,350 approx. 000 0 ← 595 housing min. 500 min. 500 max. 900 approx. 950 approx. approx. 1200 approx. 1150 min. 500 min. 500 max. 900 max. 900 approx. ∦950 approx 1400 50-60 As appropriate

FREESTANDING LAUNDRY

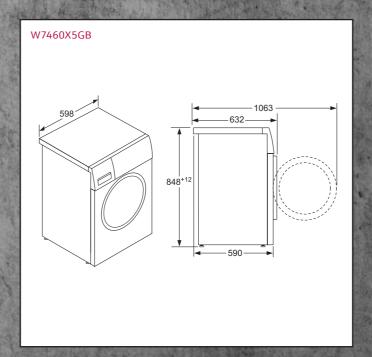

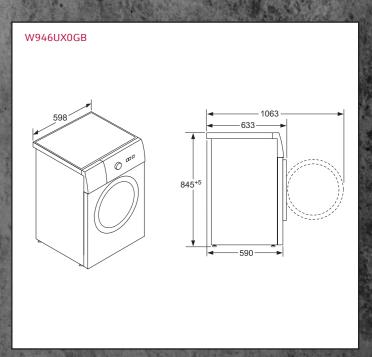

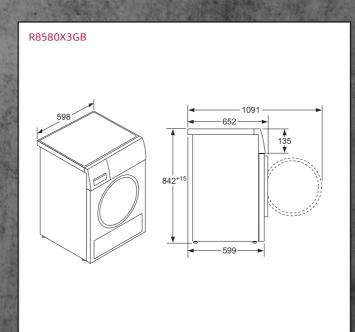

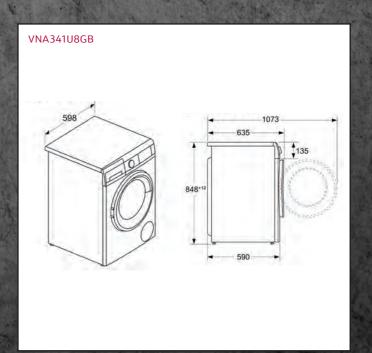





RECEIVE THE HIGHEST STANDARDS OF SERVICE FROM NEFF

NEFF appliances are well-known for their quality and we believe that our customers deserve customer service to match. We provide expert repairs both inside and outside the manufacturer's warranty period and we can offer advice on choosing an appliance which will enhance your favourite dishes.

NEFF is a division of BSH Home Appliances Limited, a company registered in England and Wales under company registration number 01844007, with registered office at: Grand Union House, Old Wolverton Road, Wolverton, Milton Keynes, Buckinghamshire, MK12 5PT.

Register my appliance

REGISTER YOUR APPLIANCE AND WARRANTY

It is important that you register all your kitchen appliances to ensure that the manufacturer has full details in the event of an important product update. You can find out more about registering your appliances online at:

registermyappliance.org.uk

All NEFF appliances are supplied with a two-year manufacturer's warranty. Please call 0800 519 2115 (Republic of Ireland 01230 0344) to register your NEFF warranty and find out more about extending your cover.

Please be aware that the above telephone number is managed by Domestic & General Services Limited who administer the warranty registration process on our behalf.








ARRANGE A VISIT FROM A NEFF ENGINEER

NEFF home appliances are built to the highest standard, but if you do need a visit from a NEFF engineer, we are here to help. Our locally based engineers are employed and trained by NEFF, which gives them unrivaled knowledge and expertise to repair NEFF appliances.

In some areas we may use an approved service partner to carry out repairs on our NEFF appliances, where the repair process may vary.

You can easily book, and manage your engineer visit online at: neff-home.com/uk/service/repair/book-a-repair-online or via our call centre (see contact details above). Republic of Ireland customers should call: 01450 2655.

Calls will be answered 24 hours a day, 7 days a week. Calls are charged at the basic rate, please check with your telephone service provider for exact charges.



ACCESSORIES AND CLEANING PRODUCTS

You can find everything you need for any appliance on the NEFF online store. It's here where you'll find our tested and approved cleaning and care products, along with other accessories ranging from a Glass Holder for your new dishwasher to a Teppan Yaki for your hob, or a new set of Telescopic Rails.

Shop online at: neff-home.com/uk/store



ONLINE HELP AND PRODUCT ADVICE

Prefer to go online? You can visit our support content at: neff-home.com/uk/service/support to quickly find the help you need. We cover questions about usage and maintenance of your appliance, as well as tips on getting started and installing your new appliances. You'll also be able to access your user manual at any time.



GENUINE NEFF SPARE PARTS

NEFF keeps a comprehensive range of replacement spare parts for up to ten years. You can browse our exploded view diagrams on our store or speak to an advisor on the phone to help you locate and buy the spare parts you need.



CREATE INSPIRE DELIGHT.

COLOUR ILLUSTRATIONS

Due to variables in photographic and printing processes, all colours in this brochure are subject to deviation from the appliance actually illustrated.

IMPORTANT NOTES
This brochure is current as from the publication date and supersedes all previous brochures for these products. This brochure should not be regarded as an infallible guide nor as an offer for sale of any particular product. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved. Due to variables in the reproduction process, colours of actual products may vary slightly from those depicted. We recommend a visit to a NEFF dealer to confirm that specifications and colours are to your satisfaction.

All photography and copy in this brochure are the property of, or under licence to, NEFF and must not be used without prior permission. Please contact the NEFF Marketing Department for assistance.

Slide&Hide®, CircoTherm®, NeffLight®, TwistPad®, FlameSelect®, SeamlessCombination® and TwistPadFire® are trade marks of BSH Home

For product specifications please go to neff-home.com/uk/ or ask your local retailer.

NEFF Dealers are not agents of NEFF and therefore have no authority to bind NEFF by any express or implied undertaking or representation.

NEFF Customer Service Grand Union House Old Wolverton Road Milton Keynes Buckinghamshire MK12 5ZR

BSH Home Appliances Ltd. M50 business Park Ballymount Dublin 12 T 1890 626 041 www.neff.ie

NEFF, a division of BSH Home Appliances Ltd. Grand Union House Old Wolverton Road Milton Keynes MK12 5PT www.neff-home.com/uk

<mark>-4896</mark> NEFF Appliance Range Brochure 2021

