


## N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B57CR22N0B



Built-in oven with SLIDE&HIDE® - unrestricted access to the oven interior.

- ✓ Slide&Hide® – The unique fully disappearing oven door.
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Pyrolytic Self-Cleaning with Easy Clean - the duo for optimal cleaning: pyrolytic after heavy use and Easy Clean for in between
- ✓ ShiftControl - fast navigation through menus and simple operation with the TFT display

Color / Material Front: .....Stainless steel  
 Built-in / Free-standing: ..... Built-in  
 Door opening: ..... Drop down  
 Cleaning : ..... Pyrolytic+Hydrolytic  
 Control Panel Material: ..... Glass  
 Door Material: ..... Glass  
 Dimensions (HxWxD): ..... 595x596x548 mm  
 Dimensions of the packed product (HxWxD): . 670 x 660 x 690 mm  
 Min. required niche size for installation (HxWxD): .....585-595 x 560-568 x 550 mm  
 Cavity dimensions: ..... 357 x 480 x 415 mm  
 Usable volume of cavity: .....71 l  
 Number of interior lights: ..... 1  
 Net weight: ..... 39.4 kg  
 Gross weight: .....42.0 kg  
 EAN code: .....4242004181897  
 Connection Rating: .....3450 W  
 Fuse protection: .....16 A  
 Voltage: .....220-240 V  
 Frequency: .....60; 50 Hz  
 Length electrical supply cord: ..... 120.0 cm



4 242004 181897

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CG10X0 Barbecue-Set, Z11CR10X0 Baking and roasting grid (standard), Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ80X0 SeamlessCombination 60 + 29cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z11TC10X0 ComfortFlex Rail (1 level), Z11TC16X0 ComfortFlex Rail (1 level) and racks, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z12TF16X0 1 level telescopic rails, full ext,pyro, Z12TF36X0 3 level telescopic rails, full ext,pyro, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens

*N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS  
STEEL  
B57CR22N0B*

#### Heating Functions

- Oven with 12 heating methods:
- CircoTherm®, Bread Baking, Full surface grill, Dough proving, CircoTherm® Eco, Centre area grill, Top/bottom heating, Top/bottom heating Eco, Pizza Setting, Low temperature cooking, Bottom heating, Circo-roasting
- Temperature range 40 °C - 275 °C
- Cavity volume: 71 net usable litres

#### Hook-in racks / rails

- Number of shelf levels: 4
- Large capacity oven with shelf supports, Telescopic shelf rails available as optional accessory

#### Design

- Cavity inner surface: enamel

#### Cleaning

- Pyrolytic self cleaning
- EasyClean® program
- Full glass inner door - safer touch door

#### Convenience

- 2.5" colour and text Display with ShiftControl
- Electronic clock with start / stop function
- Automatic temperature proposal, Actual temperature display, Optical temperature control
- Hide®, the fully retracting oven door
- Slide®, the revolving handle
- Rapid heat-up
- Halogen lighting
- Cooling fan
- Stainless-steel fan

#### Accessories

- 1 x universal pan, 2 x combination grid

#### Safety and Environment

- Maximum door temperature 30° C
- Quadruple glazed CoolTouch door
- Automatic door lock during pyrolysis, Individual adjustable child lock, Safety switch off, Residual heat indicator, Start button, Door contact switch


#### Technical Info

- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.45 KW


#### Dimensions

- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing


N 70, BUILT-IN OVEN, 60 X 60 CM, STAINLESS  
STEEL  
B57CR22N0B

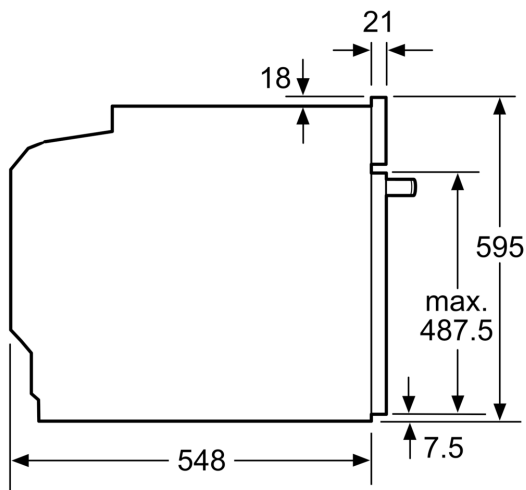

measurements in mm

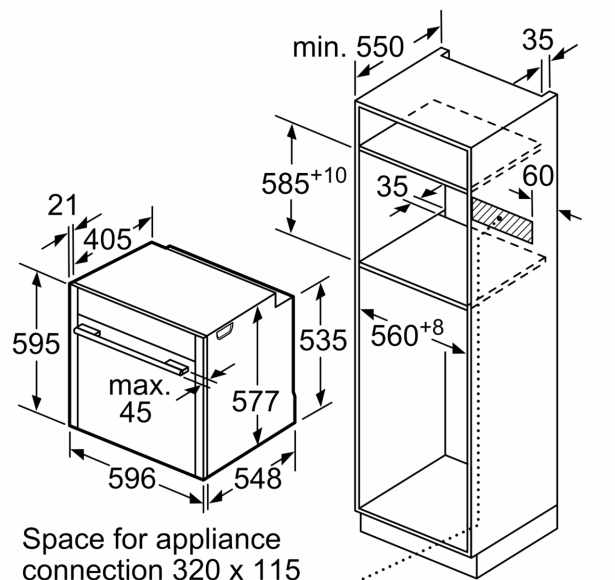

measurements in mm

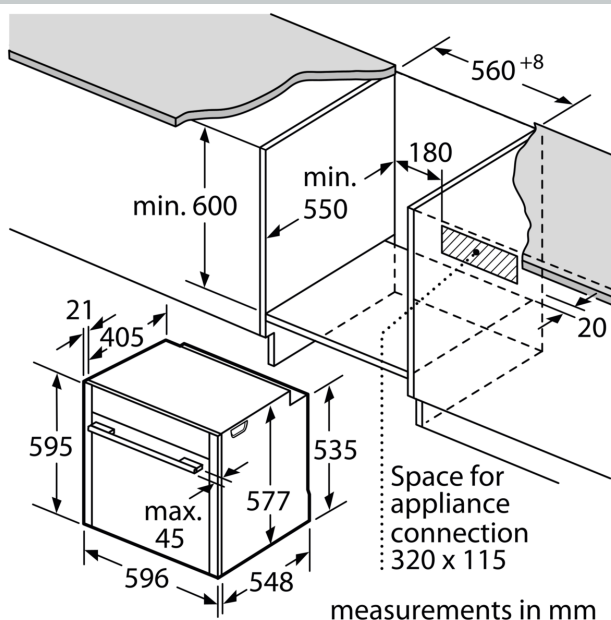

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm