

N 50, Slideout rangehood, 90 cm, Silver metallic
D49ED52X0



COOKING PASSION SINCE 1877



The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

- ✓ Efficient Drive Motor – Quiet and energy-efficient motor for a calmer kitchen.
- ✓ LED Lighting – Clear illumination while you cook.

Features

Technical Data

Typology : Pull-out
Approval certificates : Australia Standards, CE, VDE
Length electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
Minimum distance above an electric cooktop : 430 mm
Minimum distance above a gas cooktop : 650 mm
Net weight : 13.5 kg
Type of control : Electronic
Number of power settings : 3-stages + intensive setting
Maximum output air extraction : 408 m³/h
Boost position output recirculating : 496 m³/h
Maximum output recirculating air : 358 m³/h
Boost position air extraction : 758 m³/h
Number of lights : 2
Noise level : 54 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004197577
Connection Rating : 146 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : GARDY plug w/ earthing
Installation type : Built-in



4 242004 197577

N 50, Slideout rangehood, 90 cm, Silver metallic
D49ED52X0



COOKING PASSION SINCE 1877

Features







- Noise min./max. Normal Level: 42/54 dB
- For installation into a 60cm or 90cm wide wall cupboard
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit
- Telescopic drawer without handle, furniture panel or fascia panel (optional accessory) required
- Push button controls (3 power levels plus intensive setting) with Electronic display
- Extraction rate according to EN 61591 Ø 15 cm:
max. Normal use 407 m³/h
Intensive 758 m³/h
- Noise level according to EN 60704-3 exhaust air:
Max. normal use: 54 dB(A) re 1 pW
Intensive: 69 dB(A) re 1 pW
- 2 x 3 W
- Dishwasher safe metal grease filters
- Automatic intensive revert setting - 6 min
- Automatic run on for Automatic run on - 10 min
- 2 high-performance fans, Efficient BLDC-technology
- Appliance colour: silver metallic

Technical Information

- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Power rating: 146 W
- Electrical cable length 1.75 m
- Appliance dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm

N 50, Slideout rangehood, 90 cm, Silver metallic
D49ED52X0

Dimensioned drawings

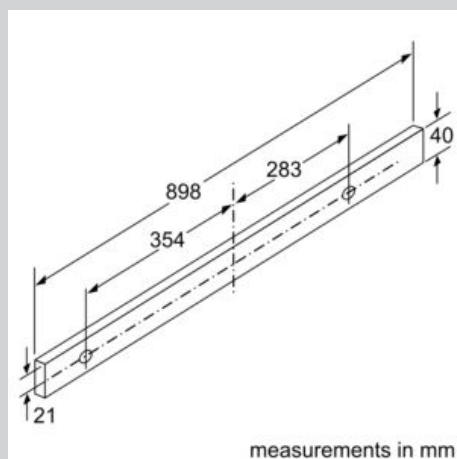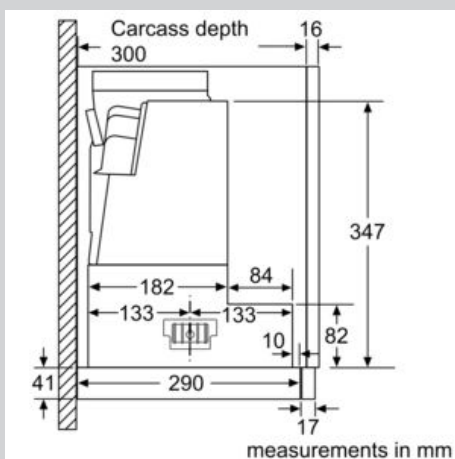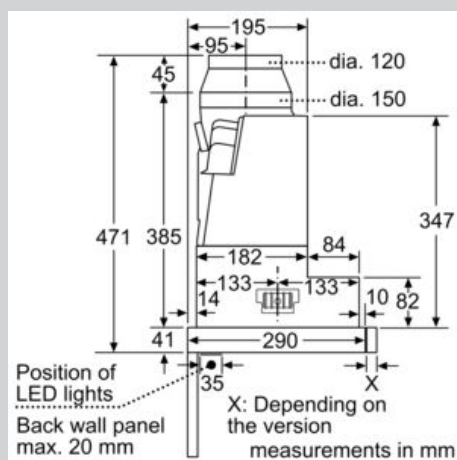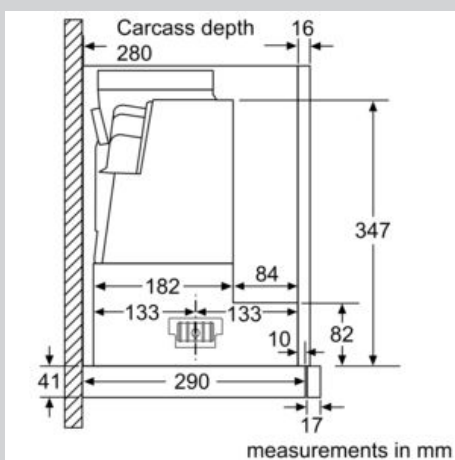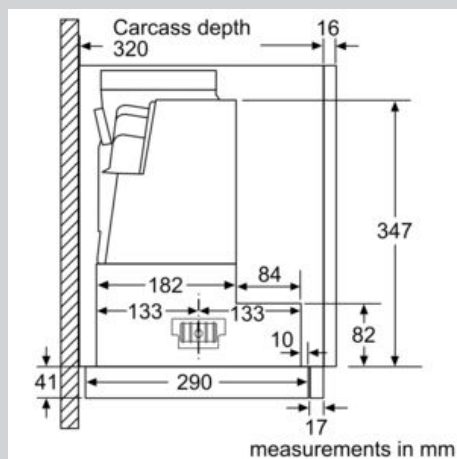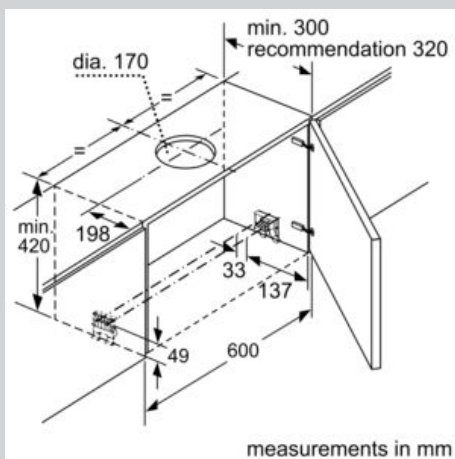

N 50, Slideout rangehood, 90 cm, Silver metallic
D49ED52X0

Dimensioned drawings

