

*N 50, INTEGRATED RANGEHOOD, 52 CM,
STAINLESS STEEL
D55MH56N0B*



Z51XB1X6	Clean Air Plus odor filter (replacement)
Z51XC1X6	Clean Air Plus recirc. kit external
Z5135X1	Standard odor filter (replacement)
Z5135X3	Standard recirculation kit
Z51ITD1X1	Long Life recirculation kit external
Z51ITP0X0	Long Life odor filter (replacement)

Your undermount rangehood fits discreetly into your cabinet for more spacious versatility in the home

- ✓ LED Lighting: Clear illumination while you cook.
- ✓ Intensive Speed Setting: Increases the extraction rate when cooking steam is intense.

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): 418mm x 496.0mm x 264mm mm
Minimum distance above an electric cooktop: 600 mm
Minimum distance above a gas cooktop: 650 mm
Net weight: 9.0 kg
Type of control: Electronic
Number of power settings: 3-stages + intensive setting
Maximum output air extraction: 575 m³/h
Boost position output recirculating: 606 m³/h
Maximum output recirculating air: 541 m³/h
Boost position air extraction: 650 m³/h
Number of lights: 2
Noise level: 67 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable aluminium
EAN code: 4242004187745
Connection Rating: 277 W
Fuse protection: 3 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: GB plug
Installation typology: Built-in



*N 50, INTEGRATED RANGEHOOD, 52 CM,
STAINLESS STEEL
D55MH56NOB*

Design & Innovation


- For installation in a kitchen cabinet
- Appliance colour: brushed steel
- Rim ventilation
- Metal grease filters with stainless steel cover

Power and Mode of Operation


- Electronic controls
- Push button controls (3 power levels plus intensive setting) with LED display
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 575 m³/h. Intensive 650 m³/h
- Noise min./max. Normal Level: 53/67 dB
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit
- Twin channel high performance fan motor
- Automatic intensive revert setting - 6 min
- Dishwasher safe Metal grease filters
- 2 x 1 Watt LED lights
- Light Intensity: 244 lux
- Colour Temperature: 4000 K
- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 67dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- Max. extraction rate: 650 m³/h
- Appliance dimensions (HxWxD): 418 x 520 x 300 mm
- Built-in dimensions: width: 50 cm, depth: 26 cm
- 120 or 150 mm tube connection diameter
- Electrical cable length 1.5 m
- Power rating: 277 W
- with one-way flap: prevents outside air from entering your kitchen
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 541 m³/h
- Intensive: 606 m³/h
- Noise level in recirculation mode: Max. normal use: 71dB(A) re 1 pW
- Intensive: 74 dB(A) re 1 pW

* In accordance with the EU-Regulation No 65/2014


N 50, INTEGRATED RANGEHOOD, 52 CM,
STAINLESS STEEL
D55MH56NOB

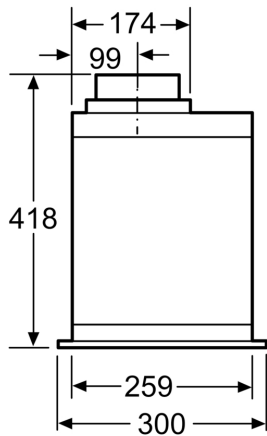

measurements in mm

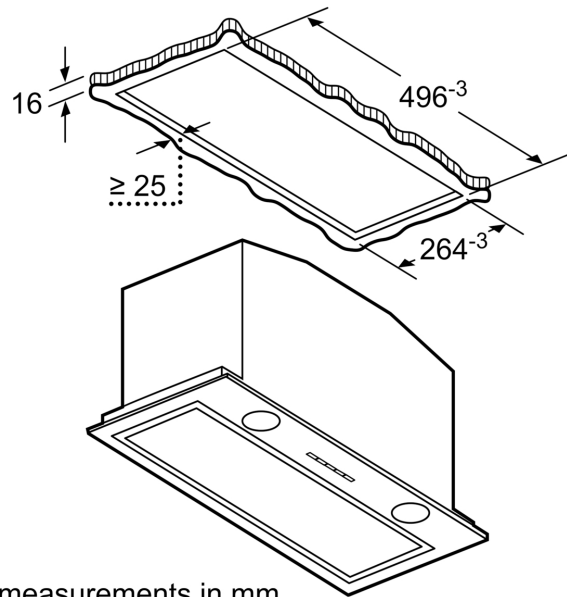


measurements in mm

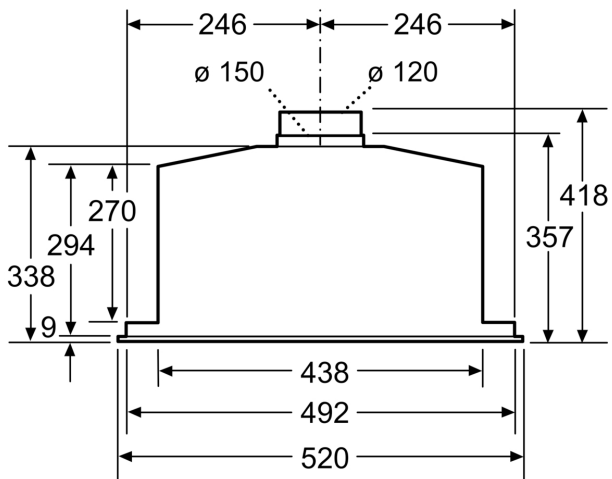

measurements in mm

Measurements in mm

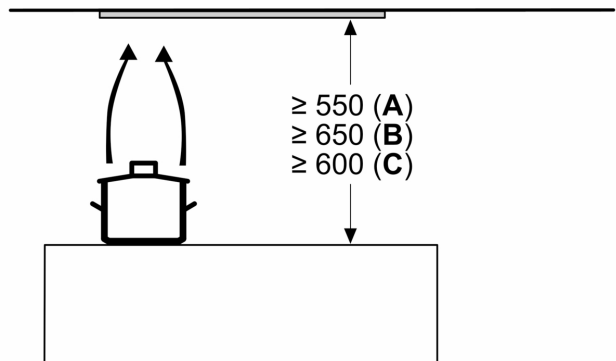

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand