


N 70, GAS COOKTOP, 60 CM, STAINLESS STEEL
T26DS59N0A

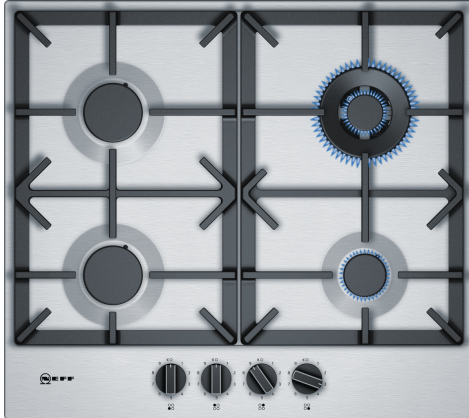

Z2480X0 Simmer plate
Z32SW10X0 Wok ring

The gas cooktop with a stainless-steel surface design and incrementally adjustable FlameSelect.

✓ FlameSelect: 9 levels of precisely controlled flame height. Simply note which number you use and the result will be the same everytime.

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 4
 Type of control setting devices:Sword knobs
 Required niche size for installation (HxWxD):45 x 560-562 x 480-492 mm
 Width of the appliance:582 mm
 Dimensions (HxWxD): 53x582x520 mm
 Dimensions of the packed product (HxWxD): . 141 x 651 x 578 mm
 Net weight: 11.9 kg
 Gross weight: 13.0 kg
 Residual heat indicator:without
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel, Stainless steel
 Color of frame: Stainless steel, Stainless steel
 Length electrical supply cord: 100.0 cm
 EAN code:4242004218159
 Gas connection rating:8000 W
 Fuse protection:3 A
 Voltage:220-240 V
 Frequency:60; 50 Hz



N 70, GAS COOKTOP, 60 CM, STAINLESS STEEL
T26DS59N0A

Design

- Stainless steel

Comfort & Convenience

- FlameSelect (9 steps)
- Sword control knobs
- One-hand ignition
- Enamelled cast iron pan supports on non-scratch rubber feet

Size & Power

- 4 Gas burners
- 2 Standard, 1 Economy, 1 Wok burner
- Left rear: Standard burner up to 6.85 Mj/h (depending on gas type)
- Right rear: Wok burner 13.6 Mj/h
- Left front: Standard burner 6.85 Mj/h (depending on gas type)
- Right front: Economy burner 4 Mj/h

Safety and Environment

- Flame failure device fitted to each individual burner
- Preset of natural gas (10mbar)

Dimensions (WxD)

- 60 cm width
- Installation measurements: 560 mm x 480 mm
- Power cord length: 100 cm with plug

Supplied Accessories

- Liquid gas nozzles (28-30/37mbar) included

N 70, GAS COOKTOP, 60 CM, STAINLESS STEEL
T26DS59N0A

