

*N 90, BUILT-IN OVEN WITH STEAM FUNCTION, 60  
X 60 CM, STAINLESS STEEL  
B47FS36N0B*



A<sup>+</sup>



2 x grid, 1 x universal pan, punched, size XL, 1 x steam container, unpunched, size S

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CG10X0 Barbecue-Set, Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ80X0 SeamlessCombination 60 + 29cm, Z11SZ90X0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CQ10A0 Grill tray, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CU30X0 Steam container, unpunched, size S, Z13CU31X0 Steam container, punched, size S, Z13CV05S0 Cover Strip, Z13TC10X0 ComfortFlex Rail (1 level) f. steam, Z13TC16X0 ComfortFlex Rail (1level)&racks f. steam, Z13TF36X0 3 level telescopic rails, full ext,steam

Built-in oven with FullSteam and SLIDE&HIDE® - combining all heating types and steam cooking in a single oven with unrestricted access

- ✓ Slide&Hide® – The fully disappearing oven door with rotating handle.
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Full Steam – Your oven is also a fully equipped steamer.
- ✓ Eco Clean with Base Clean - the duo that makes oven cleaning easier
- ✓ Shift Control - fast navigation through menus and simple operation with the TFT display.

Built-in / Free-standing: ..... Built-in  
Door opening: ..... Drop down  
Min. required niche size for installation (HxWxD): ..... 585-595 x 560-568 x 550 mm  
Dimensions: ..... 595x596x548 mm  
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm  
Control Panel Material: ..... Glass  
Door Material: ..... Glass  
Net weight: ..... 41.2 kg  
Length electrical supply cord: ..... 120.0 cm  
EAN code: .....4242004181620  
Fuse protection: ..... 16 A  
Voltage: ..... 220-240 V  
Frequency: ..... 60; 50 Hz  
Plug type: ..... no plug (electrical connection by electrician)  
Usable volume (of cavity) - NEW (2010/30/EC): .....71 l  
Energy efficiency rating: ..... A+  
Energy consumption per cycle conventional (2010/30/EC): 0.87 kWh/cycle  
Energy consumption per cycle forced air convection (2010/30/EC): ..... 0.69 kWh/cycle  
Energy efficiency index (2010/30/EC): .....81.2 %  
Included accessories: ..... 2 x grid, 1 x universal pan, 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S



*N 90, BUILT-IN OVEN WITH STEAM FUNCTION, 60  
X 60 CM, STAINLESS STEEL  
B47FS36N0B*

- 4.1" TFT colour and graphics display with ShiftControl
- Water tank empty indicator
- LED light, On/off button
- Slide&Hide® with fixed handle, SoftOpen
- MultiPoint MeatProbe

#### Features

- Combi-steam oven with 12 main functions heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Keep warm
- Additional heating methods with steam: Steaming, Reheat with steam, Dough proving, Defrost
- Control panel lock
- Automatic safety switch off Residual heat indicator Start button Door contact switch
- Electronic clock timer
- Additional functions:
- De-scaling programme
- Drying function Automatic boiling point detection
- Number of automatic programmes: 30 PC
- Baking and roasting assistant, Automatic programmes
- Rapid heat
- Cooling fan
- Stainless-steel fan

#### Design

- Cavity inner surface: enamel anthracite

#### Cleaning

- EcoClean programme, Base Clean programme




#### Accessories

- 1 x universal pan, 2 x grid, 1 x steam container, punched, size XL, 1 x steam container, punched, size S, 1 x steam container, unpunched, size S

#### Technical information

- Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of water tank: Outside cavity
- Temperature range 40 °C - 250 °C
- 120 cm Cable length
- Total connected load electric: 3.45 KW
- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

*N 90, BUILT-IN OVEN WITH STEAM FUNCTION, 60  
X 60 CM, STAINLESS STEEL  
B47FS36N0B*

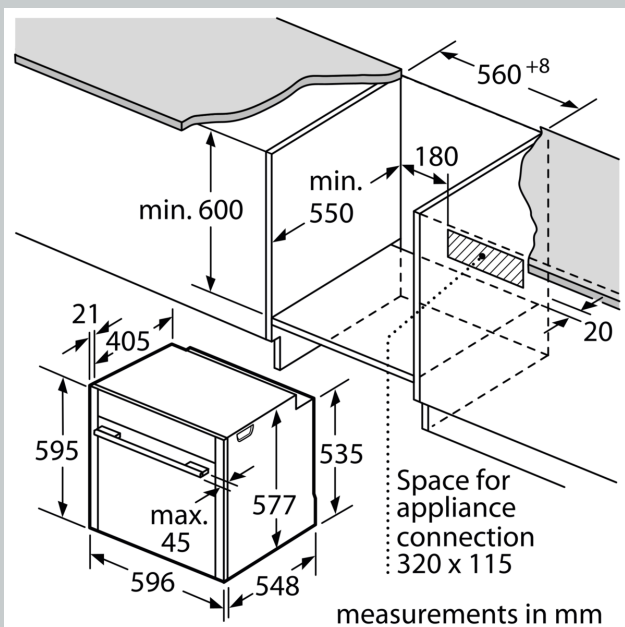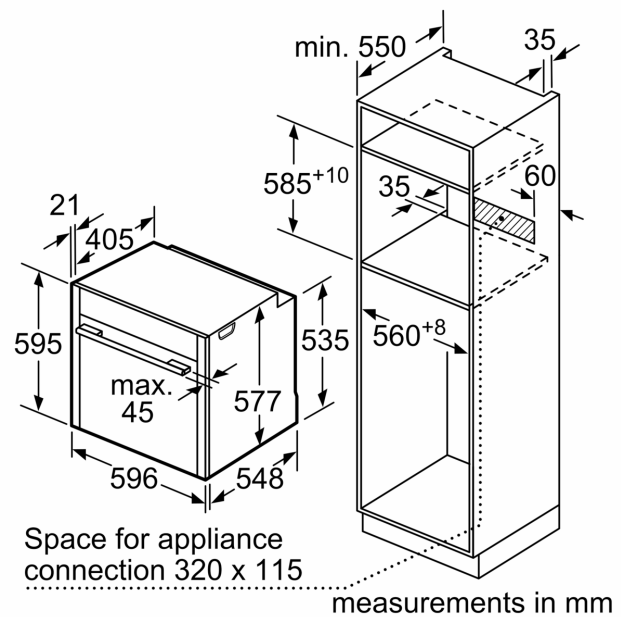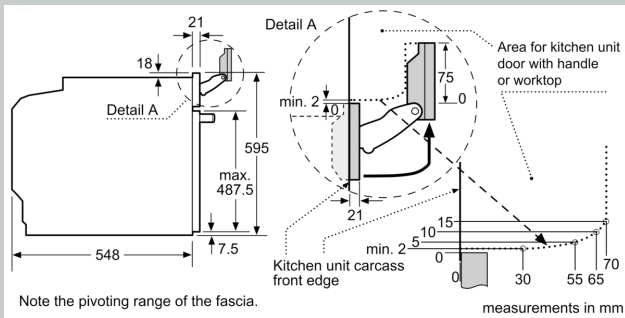

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm