

N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HH0B













Included accessories

 $1 \times$ enamel baking tray, $1 \times$ combination grid, $1 \times$ universal pan

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CB10E0 Baking tray, enamelled, Z11CR10X0 Baking and roasting grid (standard), Z11CU10E0 Multipurpose pan, enamelled, Z11GT10X3 Glass roasting dish, 5,4I, Z11TE25X0 2 level telescopic shelf rails, Z11TF25X0 2 level telescopic shelf rails, full ext, Z11TF36X0 3 level telescopic rails, full ext, Z11TI15X0 Cliprails, Z11TJ25X0 2 level telescopic rails incl 1VarioClip, Z11TJ35X0 3 level telescopic rails incl 1VarioClip, Z1352X0 Pizza pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens

Built-in oven with Slide&Hide® - unrestricted access to the oven interior

- $\sqrt{\text{Slide\&Hide}^{\$}}$ The fully disappearing oven door with rotating handle
- $\sqrt{\rm CircoTherm^{\odot}}$ Smart hot-air solution that lets you bake on up to three levels at once.
- $\sqrt{\mbox{ Eco Clean}}$ with Base Clean the duo that makes oven cleaning easier
- $\sqrt{\,}$ LCD-Display simple, straightforward with large characters for clear reading
- $\sqrt{}$ Home Connect Unleash your creativity via app.

Features

Technical Data
Built-in / Free-standing:
Integrated Cleaning system: EcoClean
programme Ecocican
, 2
Required niche size for installation (HxWxD): 585-595 x 560-568 x
550 mm
Dimensions:
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm
Control Panel Material:
Door Material:
Net weight:
Usable volume of cavity:71 l
Cooking method: Bread Baking Setting, Full width grill, Hotair
gentle, Hot Air, Conventional heat, Pizza setting, Bottom heat, Hot
air grilling
First cavity material:Other
Oven control: electronic
Length electrical supply cord:
EAN code:
Number of cavities (2010/30/EC):
Energy efficiency rating: A
Energy consumption per cycle conventional (2010/30/EC): 1.04
kWh/cycle
Energy consumption per cycle forced air convection
(2010/30/EC):
Energy efficiency index (2010/30/EC):95.3 %
Connection Rating: 2990 W
Fuse protection:
Voltage:
Frequency:
Plug type:
(electrical connection by electrician)
Included accessories:
combination grid, 1 x universal pan





N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HH0B

Features

Design

- LCD-Display Control (white)
- Elongated designed dials, Retractable control dials, Bevelled oval controls
- Slide&Hide® with rotating handle
- Cavity inner surface: enamel grey
- 4 shelf positions

Features

- HomeConnect ready on WLAN
- Control panel lock
- Automatic safety switch off Residual heat indicator Door contact switch
- Temperature proposal
- Actual temperature display Heating up indicator Automatic start Temperature probe
- Single-point meat probe
- Interior halogen light, On/off button

Cleaning

- EcoClean Direct : ceiling, back panel, side liners
- EcoClean programme, Base Clean programme
- Full glass inner door

Programmes/functions

- Oven with 8 cooking functions:, 8 cooking functions: heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bread baking, Bottom heat, CircoTherm® gentle
- Rapid heat
- Cooling fan

Accessories

- 1 Clip rail, Stop function
- 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode:1.04 kWh
- \bullet Energy consumption per cycle in fan-forced convection mode:0.81 kWh
- Number of cavities: Main cavity Heat source: electrical Cavity volume:71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxd): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual




N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B4ACM5HH0B

Dimensioned drawings


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm



A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

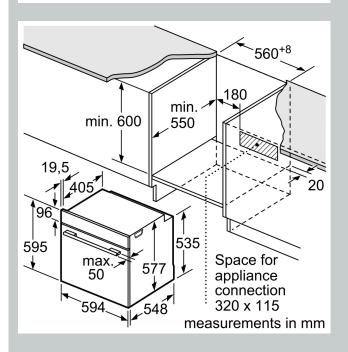





Dimensioned drawings

