N 50, Built-in oven, 60 x 60 cm, Stainless steel B5ACH7AN0B





Optional accessories

| Z11CB10E0 Z11CR10X0 Z11GT10X3 Z11GU20X0 Z11TF36X0 Z11TI15X0 Z12CQ10A0 Z13CV05S0 | 3 level telescopic rails, full ext Cliprails Grill tray, anthracite enamelled Cover Strip |
|--|--|
| | Baking Stone |
| Z19DD10X0 | Steam set for ovens |

Built-in oven with $\mathsf{Slide} \& \mathsf{Hide}^{\circledcirc}$ - unrestricted access to the oven interior

- $\sqrt{\rm Slide \& Hide ^{\odot}}$ unrestricted access in the oven interior and easy handling due to rotating handle
- $\checkmark\,$ Dual cleaning options: Pyrolytic cleaning programmes just let the oven interior clean itself. EasyClean the quick and easy option for day to day maintenance.
- $\sqrt{\rm LCD-Display}$ simple, straightforward with large characters for clear reading

Features

Technical Data

Color / Material Front : Stainless steel Construction type : Built-in Integrated Cleaning system : Hydrolytic, Hydrolytic, Pyrolytic Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 Dimensions : 595 x 594 x 548 Dimensions of the packed product (HxWxD) (mm) : $660 \times 690 \times 660$ Control Panel Material : Glass Door Material : Glass Net weight (kg) : 39.274 Usable volume of cavity (I):71 Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza settina First cavity material : Other Temperature control : electronic Number of interior lights : 1 Approval certificates : CE, VDE Length of electrical supply cord (cm) : 120 EAN code : 4242004239024 Number of cavities (2010/30/EC) : 1 Energy efficiency rating : A Energy consumption per cycle conventional (2010/30/EC) : 1.04 Energy consumption per cycle forced air convection (2010/30/EC) : 0.81 Energy efficiency index (2010/30/EC) : 95.3 Connection rating (W) : 2990 Current (A) : 13 Voltage (V) : 220-240 Frequency (Hz) : 50; 60 Plug type : no plug



N 50, Built-in oven, 60 x 60 cm, Stainless steel B5ACH7AN0B



Features

Design

- LCD-Display Control (white)
- Cavity inner surface: enamel grey

Features

- Door lock during pyrolytic cleaning Control panel lock Automatic safety switch off Residual heat indicator
- Temperature proposal Actual temperature display Heating up indicator Automatic start
- Interior halogen light

Cleaning

- Pyrolytic cleaning
- EasyClean
- Programmes/functions
- Rapid heat
- Cooling fan
- Accessories
- 2 x combination grid, 1 x universal pan


Performance/technical information


- Energy efficiency rating (acc. EU Nr. 65/2014): A Energy consumption per cycle in conventional mode: 1.04 kWh Energy consumption per cycle in fan-forced convection mode: 0.81 kWh Number of cavities: Main cavity Heat source: electrical Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxd): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual


N 50, Built-in oven, 60 x 60 cm, Stainless steel B5ACH7AN0B



Dimensioned drawings

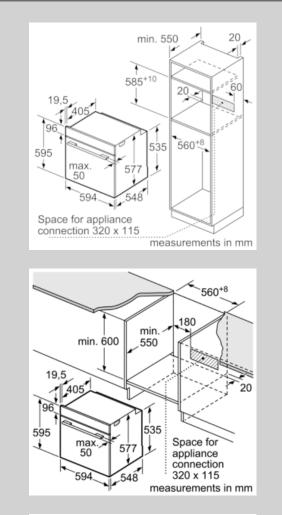



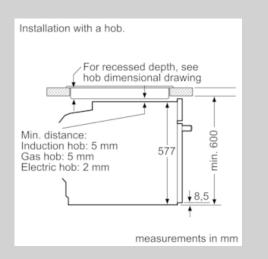

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type | min. worktop thickness | |
|-------------------------------|------------------------|-------|
| | fitted | flush |
| Induction hob | 37 mm | 38 mm |
| Full surface Induction hob | 47 mm | 48 mm |
| Gas hob | 30 mm | 38 mm |
| Electric hob | 27 mm | 30 mm |

