

N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B6ACH7AN0A



Included accessories

1 x combination grid, 1 x universal pan

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CB10E0 Baking tray, enamelled, Z11CL15E0 Lid for professional pan, enamelled, Z11CN15E0 Professional pan, enamelled, Z11CR10X0 Baking and roasting grid (standard), Z11CU10E0 Multipurpose pan, enamelled, Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11TI15X0 Cliprails, Z12CL10A0 Lid for professional pan, enamelled, Z12CN10A0 Professional pan, enamelled, Z1352X0 Pizza pan, enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1608BX0 Full ext rails, level independent, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens

- ✓ Slide&Hide® – The fully retracting oven door.
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to three levels at once.
- ✓ Dual cleaning options: Pyrolytic cleaning programmes - just let the oven interior clean itself. EasyClean - the quick and easy option for day to day maintenance.
- ✓ LCD-Display – simple, straightforward with large characters for clear reading

Features

Technical Data

Built-in / Free-standing: Built-in
Integrated Cleaning system: Pyrolytic+Hydrolytic
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Dimensions: 595x594x548 mm
Dimensions of the packed product (HxWxD): . 660 x 650 x 690 mm
Control Panel Material: Glass
Door Material: Glass
Net weight: 37.8 kg
Usable volume of cavity: 71 l
Cooking method: Bread Baking Setting, Full width grill, Hotair gentle, Hot Air, Conventional heat, Pizza setting, Bottom heat, Hot air grilling
Oven control: electronic
Length electrical supply cord: 120 cm
EAN code:4242004237860
Number of cavities (2010/30/EC): 1
Energy efficiency rating: A
Energy consumption per cycle conventional (2010/30/EC): 1.04 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC): 0.81 kWh/cycle
Energy efficiency index (2010/30/EC):95.3 %
Connection Rating:3600 W
Fuse protection:16 A
Voltage:220-240 V
Frequency:60; 50 Hz
Plug type: no plug (electrical connection by electrician)
Included accessories: 1 x combination grid, 1 x universal pan



N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS STEEL B6ACH7AN0A

Features

Features

- 8 heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bread baking, Bottom heat, CircoTherm® gentle
- Temperature range 30 °C - 275 °C
- Cavity volume: 71 litre

Level independent telescopic rails

- Available as an accessory

Design

- LCD-Display Control (white)
- Retractable control dials, Elongated designed dials
- Electronic clock timer
- Slide&Hide® with fixed handle
- EasyClean
- Full glass inner door
- Cavity inner surface: enamel anthracite
- Bar handle

Programmes/functions

- Pyrolytic cleaning
- Rapid heat
- Interior halogen light, On/off button
- Cooling fan

Features

- 30 °C - Very low door temperature
- Door lock during pyrolytic cleaning
- Control panel lock
- Automatic safety switch off
- Residual heat indicator

Accessories

- 1 x combination grid, 1 x universal pan

Technical information

- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode: 1.04 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.81 kWh
- Number of cavities: Main cavity
- Heat source: electrical
- Cavity volume: 71 litre

Performance/technical information

- Appliance dimension (h x w x d): 595 mm x 594 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- "For-details-on-installation-and-ventilation requirements – please refer to the installation manual prior to fitting."


N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS
STEEL
B6ACH7AN0A

Dimensioned drawings

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Measurements in mm

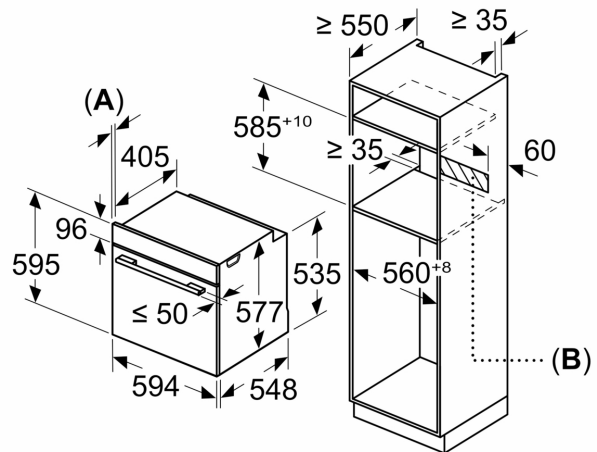


A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

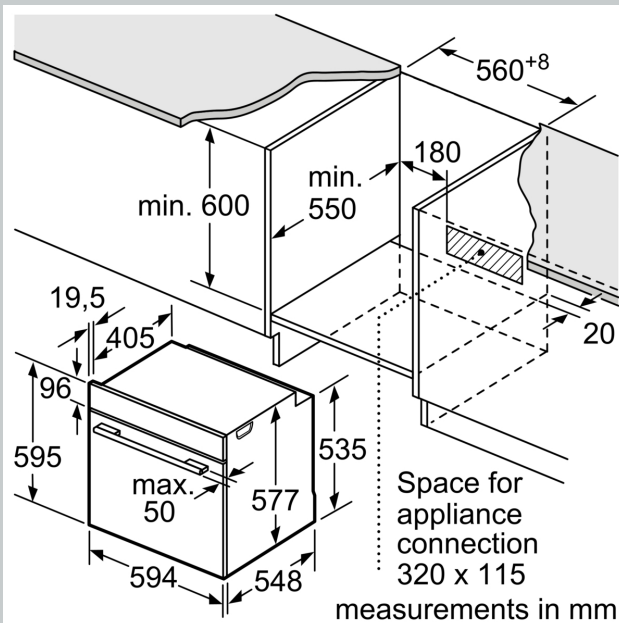

measurements in mm

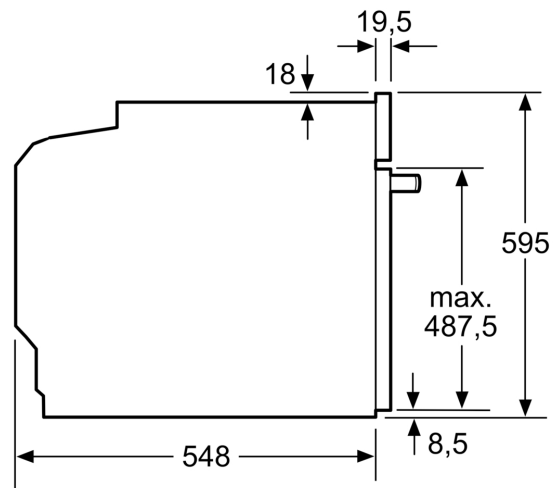

measurements in mm

Dimensioned drawings

Installation with a hob.

