


N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS  
STEEL  
B6ACH7HH0B



#### Included accessories

2 x combination grid, 1 x universal pan

#### Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and roasting grid (standard), Z11TI15X0 Cliprails, Z12CB10A0 Baking tray, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1608BX0 Full ext rails, level independent, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens

Built-in Slide&Hide® oven with fixed handle - unrestricted access to the oven interior thanks to the fully retracting oven door

- ✓ Slide&Hide® – The fully retracting oven door.
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to three levels at once.
- ✓ Dual cleaning options: Pyrolytic cleaning programmes - just let the oven interior clean itself. EasyClean - the quick and easy option for day to day maintenance.
- ✓ LCD-Display – simple, straightforward with large characters for clear reading
- ✓ Home Connect – Unleash your creativity via app.

#### Features

##### Technical Data

Built-in / Free-standing: ..... Built-in  
Integrated Cleaning system: ..... Pyrolytic+Hydrolytic  
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm  
Dimensions: ..... 595x594x548 mm  
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm  
Control Panel Material: ..... Glass  
Door Material: ..... Glass  
Net weight: ..... 40.0 kg  
Usable volume of cavity: ..... 71 l  
Cooking method: ..... Bread Baking Setting, Full width grill, Hotair gentle, Hot Air, Conventional heat, Pizza setting, Bottom heat, Hot air grilling  
Oven control: ..... electronic  
Length electrical supply cord: ..... 120.0 cm  
EAN code: .....4242004245834  
Number of cavities (2010/30/EC): ..... 1  
Energy efficiency rating: ..... A  
Energy consumption per cycle conventional (2010/30/EC): 1.04 kWh/cycle  
Energy consumption per cycle forced air convection (2010/30/EC): ..... 0.81 kWh/cycle  
Energy efficiency index (2010/30/EC): .....95.3 %  
Connection Rating: ..... 2990 W  
Fuse protection: .....13 A  
Voltage: .....220-240 V  
Frequency: ..... 50; 60 Hz  
Plug type: ..... no plug (electrical connection by electrician)  
Included accessories: .....2 x combination grid, 1 x universal pan



N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS  
STEEL  
B6ACH7HH0B

## Features

### Design

- LCD-Display Control (white)
- Elongated designed dials, Retractable control dials, Bevelled oval controls
- Cavity inner surface: enamel anthracite
- Slide&Hide® with fixed handle
- Bar handle
- 4 shelf positions

### Features

- HomeConnect ready on WLAN
- Door lock during pyrolytic cleaning
- Control panel lock Automatic safety switch off Residual heat indicator Door contact switch
- Temperature proposal
- Actual temperature display Heating up indicator Automatic start
- Interior halogen light, On/off button
- 1 Clip rail, Stop function

### Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

### Programmes/functions

- Oven with 8 cooking functions: 8 cooking functions: heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bread baking, Bottom heat, CircoTherm® gentle
- Rapid heat
- Cooling fan



### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode: 1.04 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.81 kWh
- Number of cavities: Main cavity Heat source: electrical Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 595 mm x 594 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

**B:** Space for appliance connection 320 x 115 mm

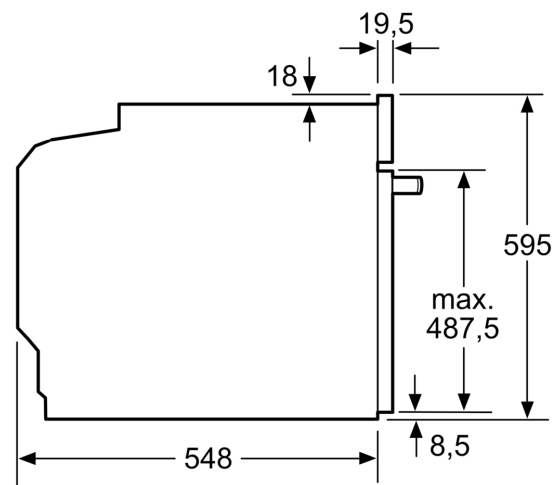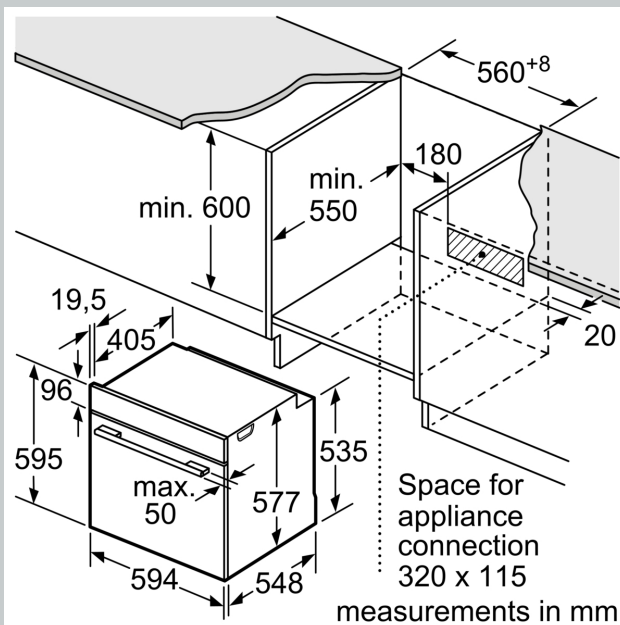

3 /

## Dimensioned drawings

### Installation with a hob.

