N 50, Built-in oven, 60 x 60 cm, Stainless steel B6ACH7HN0B





Optional accessories

Z11AB15A0	Baking tray, non-stick ceramic coated
Z11CB10E0	Baking tray, grey enamelled
Z11CR10X0	Baking and roasting grid (standard)
Z11GT10X3	Glass roasting dish, 5,4l
Z11TF36X0	3 level telescopic rails, full ext
Z11TI15X0	Cliprails
Z13CV05S0	Cover Strip
Z1913X0	Baking Stone
Z19DD10X0	Steam set for ovens

- $\sqrt{}$ Slide&Hide® with fixed handle the fully retracting oven door.
- $\checkmark\,$ Dual cleaning options: Pyrolytic cleaning programmes just let the oven interior clean itself. EasyClean the quick and easy option for day to day maintenance.
- $\sqrt{}$ LCD-Display simple, straightforward with large characters for clear reading
- $\checkmark\,$ Clip-on Rail easily removed and installed telescopic rails for flexible use on all shelf levels

Features

Technical Data

Color / Material Front : Stainless steel Construction type : Built-in Integrated Cleaning system : Hydrolytic, Hydrolytic, Pyrolytic Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 Dimensions : 595 x 594 x 548 Dimensions of the packed product (HxWxD) (mm) : $670 \times 700 \times 660$ Control Panel Material : Glass Door Material : Glass Net weight (kg) : 39.824 Usable volume of cavity (I) : 71 Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza setting First cavity material : Other Temperature control : electronic Number of interior lights : 1 Approval certificates : CE, VDE Length of electrical supply cord (cm) : 120 EAN code : 4242004225256 Number of cavities (2010/30/EC) : 1 Energy efficiency rating : A Energy consumption per cycle conventional (2010/30/EC) : 1.04 Energy consumption per cycle forced air convection (2010/30/EC) : 0.81 Energy efficiency index (2010/30/EC) : 95.3 Connection rating (W): 2990 Current (A) : 13 Voltage (V) : 220-240 Frequency (Hz) : 60; 50 Plug type : no plug





Features

Design

- LCD-Display Control (white)
- Cavity inner surface: enamel grey
- Slide&Hide[®] with fixed handle

Features

- Door lock during pyrolytic cleaning Control panel lock Automatic safety switch off Residual heat indicator
- Temperature proposal Actual temperature display Heating up indicator Automatic start
- Interior halogen light

Cleaning

- Pyrolytic cleaning
- EasyClean

Programmes/functions

- Rapid heat
- Cooling fan
- Accessories
- 1 Clip rail, Stop function
- 1 x universal pan, 2 x combination grid


Performance/technical information


- Energy efficiency rating (acc. EU Nr. 65/2014): A Energy consumption per cycle in conventional mode: 1.04 kWh Energy consumption per cycle in fan-forced convection mode: 0.81 kWh Number of cavities: Main cavity Heat source: electrical Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxd): 585 mm 595 mm x 560 mm 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual


N 50, Built-in oven, 60 x 60 cm, Stainless steel B6ACH7HN0B



Dimensioned drawings

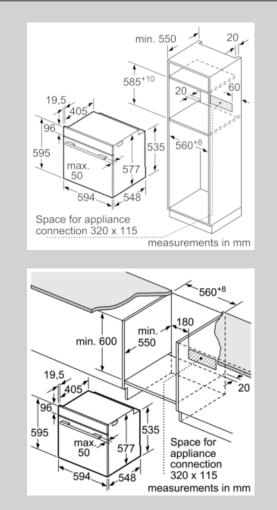



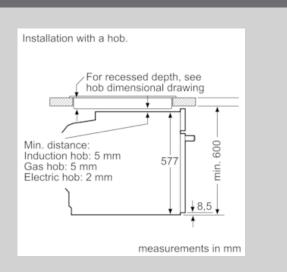

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm