


N 90, Wall-mounted cooker hood, 33 cm, Black
D35KHV2S0B

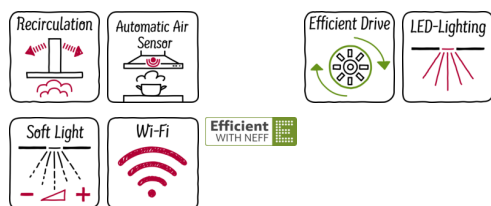

The high-powered, cube-shaped hood design is a show-stopper in any kitchen

- ✓ Sensor-controlled automatic system: focus on your cooking and keep the noise to a minimum thanks to the fully automatic hood control when the Wi-Fi compatible hob is switched on
- ✓ Climate Control Sensor: Detects the amount of steam and smells using a sensor attached to the motor and automatically sets the most effective power level to extract it
- ✓ Hob-Hood Control: conveniently control the hood directly from the hob (with Wi-Fi enabled hob)
- ✓ CleanAir accessory: nothing but clean air thanks to the premium filter with high odour neutralisation (approx. 95%)
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 501
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 21.952
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Boost position output recirculating (m³/h) : 400.0
 Number of lights (Stck) : 2
 Grease filter material : Washable aluminium
 EAN code : 4242004209997
 Connection rating (W) : 146
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

Z50XP0X0 Long Life odor filter (replacement)
 Z5170X1 CleanAir active carbon filter spare part
 Z53XXB1X6 Clean Air Plus odor filter (replacement)



4 242004 209997

N 90, Wall-mounted cooker hood, 33 cm, Black

D35KHV2SOB

Features

Key performance features:

- Extraction rate in recirculation mode:
Max. normal use: 329 m³/h
Intensive: 400 m³/h
- Noise max. Normal Level: NO_FEATURE dB*

Features

- Climate Control Sensor
- Hob-Hood control (with Wi-Fi enabled hob)
- Touch control
- LED display
- 3 power levels and 2 intensive settings
- 2 x 3w LED Light
- Colour Temperature: 3500 K
- softLight with dimmer function
- Efficient BLDC technology
- Noise reduction function
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Clean Air charcoal filter included
- 1 metal grease filter cassette
- Saturation indicator for metal and charcoal filter
- For wall mounted installation

Design

- Black Glass
- Cube design
- Easy installation system
- Touch control
- Electronic controls

Performance/technical information

- Suitable for recirculated extraction
- Max. extraction rate: 400 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 329 m³/h
Intensive: 400 m³/h
- Noise max. Normal Level: NO_FEATURE dB*
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: NO_FEATURE dB (A) re 1pW
- Noise levels in recirculation mode:
Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
Intensive: 72 dB(A) re 1 pW (59 dB(A) re 20 µPa sound pressure)
- Power rating: 146 W
- Light Intensity: 680 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Dimensions (HxWxD): 501 mm x 330 x 291 mm

Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014