


N 70, Wall-mounted cooker hood, 90 cm, grey glass
D39GL64NOB



COOKING PASSION SINCE 1877



A

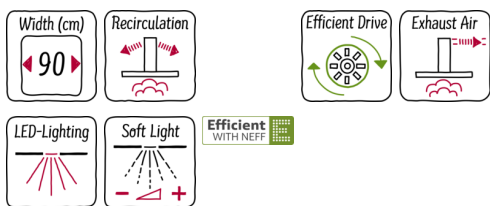

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 582-920/582-1030
 Height of product, without chimney (mm) : 387
 Minimum distance above an electric hob : 400
 Minimum distance above a gas hob : 500
 Net weight (kg) : 23.859
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 410
 Boost position output recirculating (m³/h) : 380
 Maximum output recirculating air (m³/h) : 310
 Boost position air extraction (m³/h) : 730
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 58
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable stainless steel
 EAN code : 4242004174196
 Connection rating (W) : 166
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted



4 242004 174196

Optional accessories

- Z50XP0X0 Long Life odor filter (replacement)
- Z5101X1 Standard odor filter (replacement)
- Z5101X5 Standard recirculation kit
- Z5170X1 CleanAir active carbon filter spare part
- Z5270X0 CleanAir Recirculation Kit
- Z5905N0 Chimney extension 1000 mm
- Z5915N0 Chimney extension 1500 mm

*N 70, Wall-mounted cooker hood, 90 cm, grey
glass
D39GL64NOB*

Features

Special features

- 7 segment LED display
- Interval operation
- Noise reduction function

Features

- 2 x LED lights
- 2 metal grease filter cassettes
- SoftLight with dimmer function

Design

- 90 cm wide
- For wall mounted installation
- Grey glass angled canopy
- Soft touch control for extractor speeds and light
- Stainless steel filter covers
- Height adjustable

Performance/technical information

- Suitable for ducted extraction and recirculation
- Extraction rate according to EN 61591 \varnothing 15 cm:
max. Normal use 410 m³/h
Intensive 730 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at
maximum normal setting: extraction rate: 58 dB (A) re 1pW (44
dB (A) re 20 μ Pa sound pressure)
- 3 power levels and 2 intensive settings
- Automatic revert setting
- Easy mounting system

Optional accessories

- Recirculating kit Z5101X5, Z5270X0

N 70, Wall-mounted cooker hood, 90 cm, grey
 glass
 D39GL64NOB

Dimensioned drawings

