


N 30, Telescopic cooker hood, 60 cm, Silver metallic
D46BR12N0B



COOKING PASSION SINCE 1877



D



Optional accessories

Z54TC01X0 Active carbon filter
Z54TS01X0 Recirculating kit

Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

✓ Integrated Power Button – the telescopic hood automatically starts and stops when you slide it out and back in

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 175
Required niche size for installation (HxWxD) : 162mm x 526mm x 290mm
Minimum distance above an electric hob : 430
Minimum distance above a gas hob : 650
Net weight (kg) : 8.334
Type of control : mechanical
Number of speed settings : 2
Maximum output air extraction (m³/h) : 331
Maximum output recirculating air (m³/h) : 198
Number of lights (Stck) : 2
Noise level (dB(A) re 1 pW) : 64
Diameter of air outlet (mm) : 120 / 150
Grease filter material : Washable aluminium
EAN code : 4242004217404
Connection rating (W) : 130
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : GB plug
Installation type : Built-in



4 242004 217404

N 30, Telescopic cooker hood, 60 cm, Silver
metallic
D46BR12NOB

Features

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Noise max. Normal Level: 64 dB*

Features

- Switch control operation
- 2 speeds
- 2 x 20W halogen lights
- Colour Temperature: 2700 K
- 1 metal grease filter cassette
- For installation into a 600mm wide cupboard
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back

Design

- Silver metallic grey
- Telescopic hood
- Switch control operation
- Mechanical controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. NO_FEATURE m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 64 dB (A) re 1pW
- Power rating: 130 W
- Light Intensity: 383 lux
- Colour Temperature: 2700 K
- Electrical cable length 1.75 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 203-203 x 598 x 290 mm
- Dimensions recirculating (HxWxD): 203-203 x 598 x 290 mm
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: D*
- Lighting Efficiency Class: F*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 68.2 kWh/year*







Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014


N 30, Telescopic cooker hood, 60 cm, Silver
metallic
D46BR12N0B

Dimensioned drawings

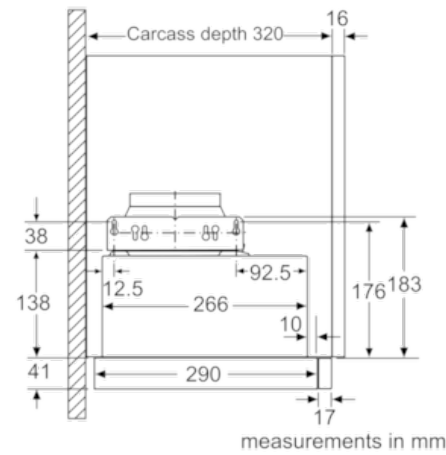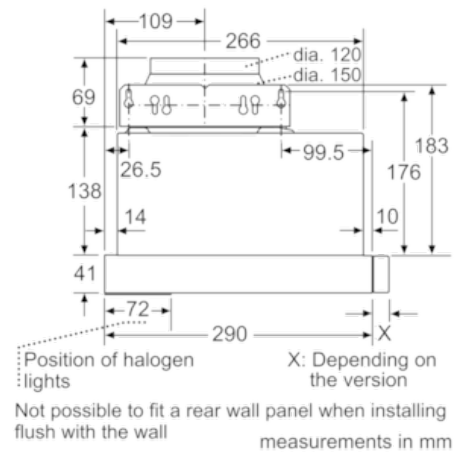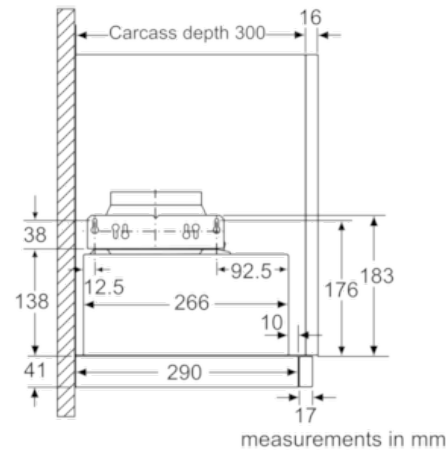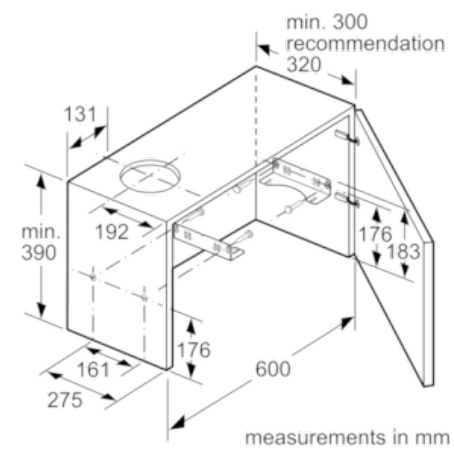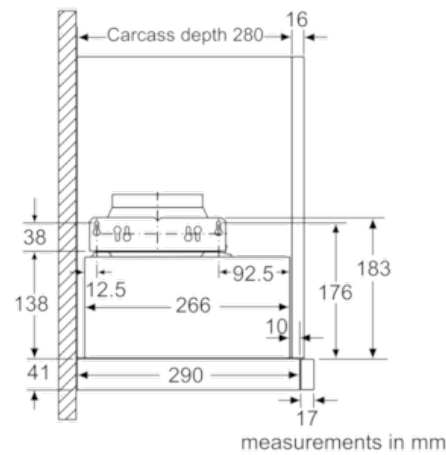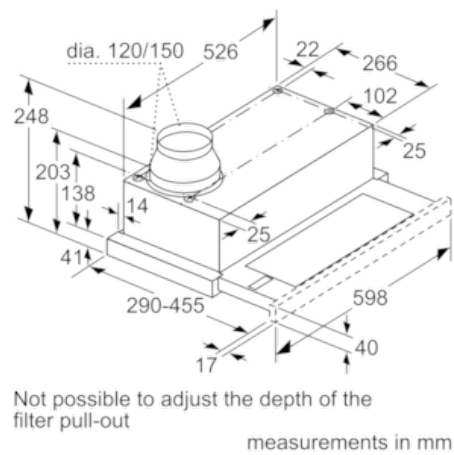

N 30, Telescopic cooker hood, 60 cm, Silver
metallic
D46BR12N0B

Dimensioned drawings

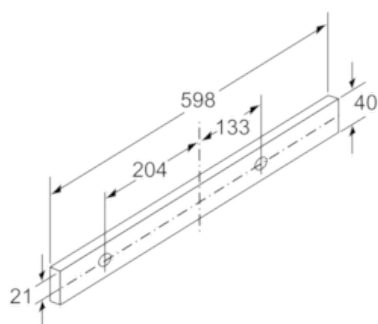

measurements in mm