


N 50, Telescopic cooker hood, 60 cm, Silver metallic
D46ED22NOB



COOKING PASSION SINCE 1877

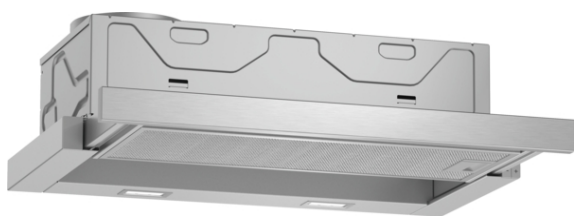

A



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Features

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length of electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 162mm x 526.0mm x 290mm mm
Minimum distance above an electric hob : 430 mm
Minimum distance above a gas hob : 650 mm
Net weight : 8.4 kg
Type of control : Electronic
Maximum output air extraction : 270 m³/h
Boost position output recirculating : 171.0 m³/h
Maximum output recirculating air : 159 m³/h
Boost position air extraction : 404 m³/h
Number of lights (Stck) : 2
Noise level : 62 dB(A) re 1 pW
Diameter of air outlet : 150 / 120 mm
Grease filter material : Washable aluminium
EAN code : 4242004204084
Connection rating : 76 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 60; 50 Hz
Plug type : GB plug
Installation type : Built-in

Optional accessories

Z54TC01X0 Standard odor filter (replacement)
Z54TH60D0 Design Handle strip
Z54TS01X0 Standard recirculation kit



4 242004 204084

N 50, Telescopic cooker hood, 60 cm, Silver
metallic
D46ED22NOB



COOKING PASSION SINCE 1877

Features

Features

- LED display
- 2 x LED lights
- 2 metal grease filter cassettes
- metal grease filter
- 3 speeds plus intensive
- Automatic after running (Automatic after running (10 minutes))
- Automatic intensive revert (6mins)

Design

- Telescopic hood
- Silver metallic grey
- Standard design
- Soft touch control
- Electronic controls
- Neutral white lights

Performance/technical information







- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591 Ø 15 cm:
max. Normal use 270 m³/h
Intensive 404 m³/h
- Power rating: 76 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at
maximum normal setting: extraction rate: 62 dB (A) re 1pW
- Noise max. Normal Level: Noise, max. speed in normal us: 62 dB
dB*
- Light Intensity: 766 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.75 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 203-203 x 598 x 290 mm
- Dimensions recirculating (HxWxD): 203-203 x 598 x 290 mm
- Built-in dimensions (HxWxD): 162 x 526 x 290 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes
from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 23.6 kWh/year*

N 50, Telescopic cooker hood, 60 cm, Silver
metallic
D46ED22NOB



COOKING PASSION SINCE 1877

Dimensioned drawings

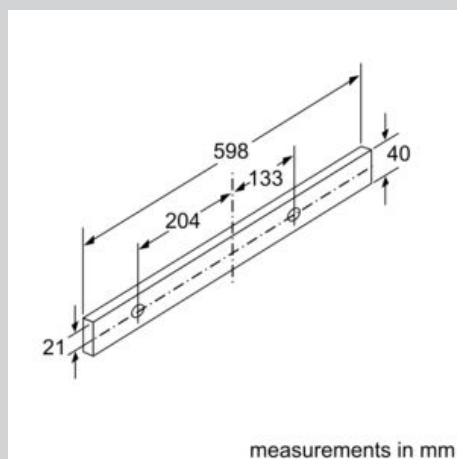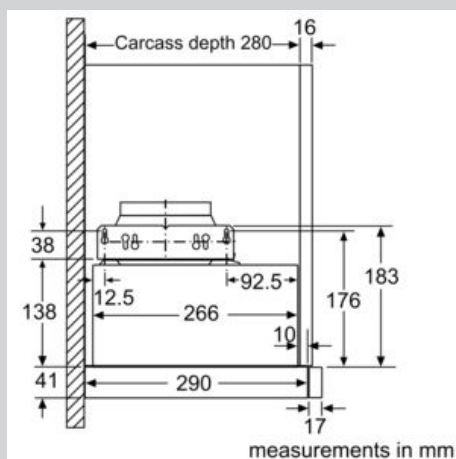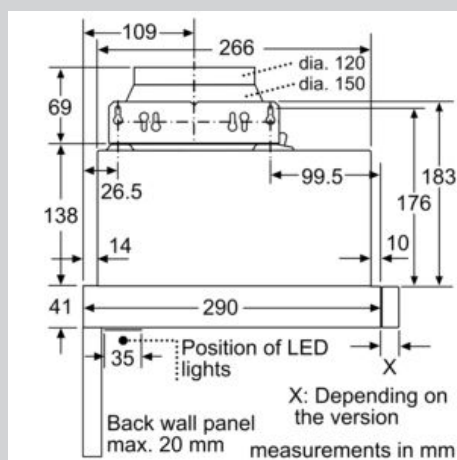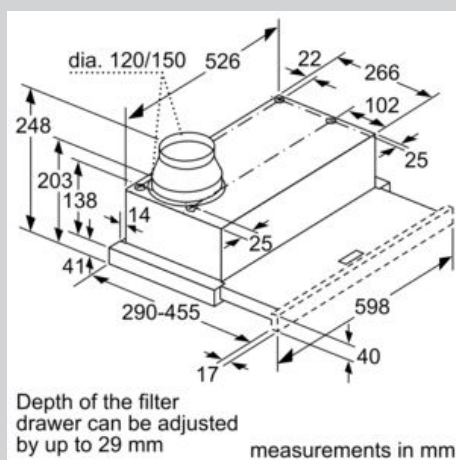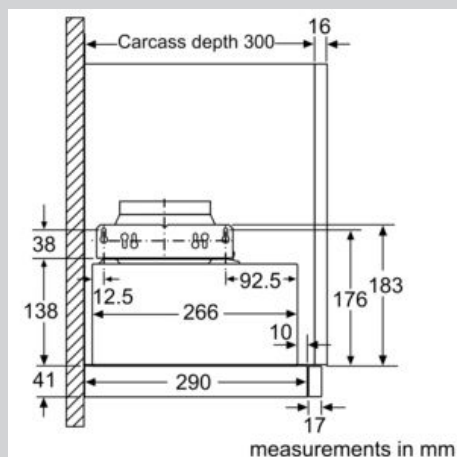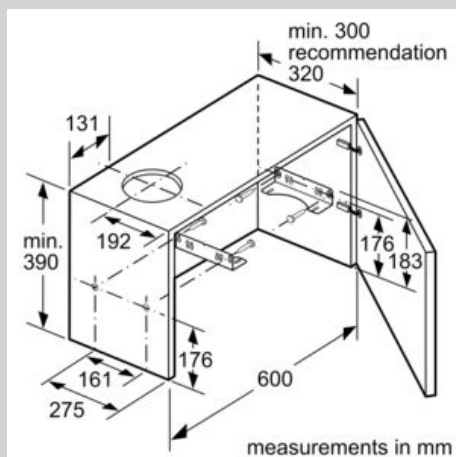

N 50, Telescopic cooker hood, 60 cm, Silver
metallic
D46ED22NOB

Dimensioned drawings

