

N 90, Telescopic cooker hood, 60 cm, Stainless steel
D46PU54X0B




COOKING PASSION SINCE 1877



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Climate Control Sensor: Detects the amount of steam and smells using a sensor attached to the motor and automatically sets the most effective power level to extract it
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense

B

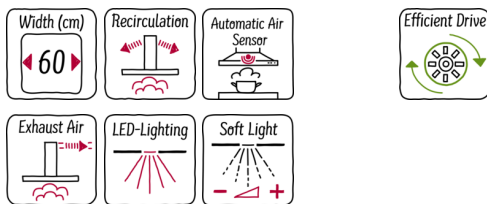

Features

Technical Data

Typology : Pull-out
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 175
 Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm
 Minimum distance above an electric hob : 430
 Minimum distance above a gas hob : 650
 Net weight (kg) : 11.763
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 381
 Boost position output recirculating (m³/h) : 475.0
 Boost position air extraction (m³/h) : 677
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 56
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004204213
 Connection rating (W) : 146
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Built-in

Optional accessories

Z51ITP0X0	Long Life odor filter (replacement)
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external
Z54TC02X0	Standard odor filter (replacement)
Z54TL60X0	Lowering frame
Z54TR00X0	gleanAir active carbon filter
Z54TR60X3	CleanAir Recirculation Kit
Z54TS02X0	Standard recirculation kit



N 90, Telescopic cooker hood, 60 cm, Stainless steel
D46PU54X0B

Features

Features

- 7 segment LED display
- 2 x LED lights
- softLight with dimmer function
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- metal grease filter
- 3 power levels and 2 intensive settings
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- ClimateControl sensor
- Additional noise insulation
- Noise reduction function

Design

- Telescopic hood
- Stainless steel
-
- Touch control
- Electronic controls
- Neutral white lights

Performance/technical information

- Telescopic comfort installation
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 381 m³/h
Intensive 677 m³/h
- Power rating: 146 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 56 dB (A) re 1pW
- Noise max. Normal Level: 56 dB*
- Light Intensity: 711 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.75 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 426-426 x 598 x 290 mm
- Dimensions recirculating (HxWxD): 426-426 x 598 x 290 mm
- built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 41.3 kWh/year*