





Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- $\sqrt{}$ Oven fit: bring harmony to your kitchen
- $\sqrt{\ }$ Automatic Air Sensor Adjusts the extraction rate automatically.
- $\sqrt{\mbox{ Special Noise Insulation}}$ For a quiet cooking area.
- $\sqrt{\,}$ Efficient Drive Motor Quiet and energy-efficient hood motor for a calmer kitchen.
- $\sqrt{\,}$ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger







Ontinnal accessories

Z51ITD1X1	Long Life recirculation kit external
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external
Z54TC02X0	Standard odor filter (replacement)
Z54TM90X0	Installation kit for 90cm wide wall unit
Z54TS02X0	Standard recirculation kit

Features

Technical Data

Typology: Pull-out

Approval certificates : CE, VDE

Length of electrical supply cord: 175 cm

Required niche size for installation (HxWxD) : 385mm x 524.0mm x

290mm mm

Minimum distance above an electric hob : 430 mm Minimum distance above a gas hob : 650 mm

Net weight: 15.1 kg Type of control: Electronic

Number of speed settings : 3-stage + 2 intensive Maximum output air extraction : 395 $\,$ m³/h Boost position output recirculating : 628 $\,$ m³/h Maximum output recirculating air : 358 $\,$ m³/h Boost position air extraction : 708 $\,$ m³/h

Number of lights (Stck): 2 Noise level: 56 dB(A) re 1 pW Diameter of air outlet: 120 / 150 mm Grease filter material: Washable stainless steel

EAN code: 4242004204220 Connection rating: 146 W Fuse protection: 10 A Voltage: 220-240 V Frequency: 60; 50 Hz Plug type: GB plug Installation type: Built-in





N 90, Telescopic cooker hood, 90 cm, Stainless steel D49PU54X0B

Feature:

Features

- 7 segment LED display
- ClimateControl sensor
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- Silence kit
- Noise reduction function
- 2 x LED lights
- softLight with dimmer function
- Neutral white lights
- 3 metal grease filter cassettes
- Interval operation
- Automatic after running (Automatic after running (10 minutes))
- Saturation indicator for metal and charcoal filter

Design

- Telescopic hood
- Installation: Cupboard 60 or 90 cm
- Installation system: Telescopic comfort installat.
- Stainless steel
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 394 m³/h Intensive 708 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust

Max. normal use: 56 dB(A) re 1 pW Intensive: 68 dB(A) re 1 pW

• With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:

Extraction rate in recirculation mode:

Max. normal use: 358 m³/h
Intensive: 628 m³/h


Noise level in recirculation mode: Max. normal use: 60 dB(A) re 1 pW Intensive: 71 dB(A) re 1 pW

- Additional noise insulation
- Power rating: 146 W
- Light Intensity: 601 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.75 m
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 37.9 kWh/year*
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Dimensions exhaust air (HxWxD): 426-426 x 898 x 290 mm
- Dimensions recirculating (HxWxD): 426-426 x 898 x 290 mm
- * In accordance with the EU-Regulation No 65/2014



N 90, Telescopic cooker hood, 90 cm, Stainless steel D49PU54X0B



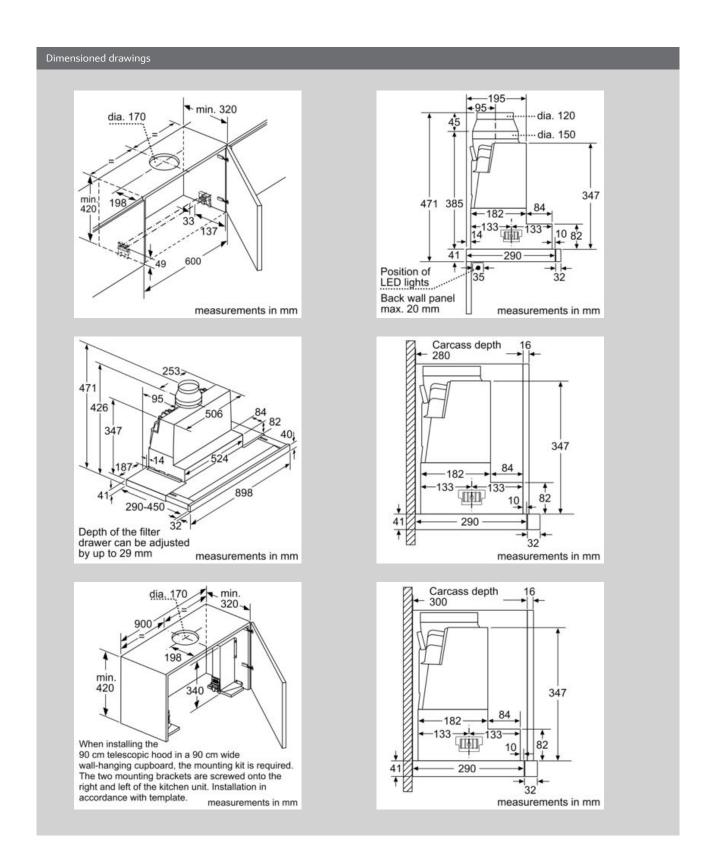



N 90, Telescopic cooker hood, 90 cm, Stainless steel D49PU54X0B

