

N 30, Built-under cooker hood, 60 cm, Stainless steel
D61LAC1NOB




COOKING PASSION SINCE 1877

The conventional hood extracts reliably – mounted under a cabinet or on a wall.

Features

Technical Data

Typology : Traditional
Approval certificates : CE
Length of electrical supply cord (cm) : 145
Minimum distance above an electric hob : 650
Minimum distance above a gas hob : 650
Net weight (kg) : 5.076
Type of control : mechanical
Number of speed settings : 3
Maximum output air extraction (m³/h) : 350
Number of lights (Stck) : 2
Noise level (dB(A) re 1 pW) : 72
Diameter of air outlet (mm) : 120 / 100
Grease filter material : Washable aluminium
EAN code : 4242004214915
Connection rating (W) : 146
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : GB plug
Installation type : Built-under



4 242004 214915

Optional accessories

Z5101X0 Standard odor filter

N 30, Built-under cooker hood, 60 cm, Stainless
steel
D61LAC1NOB

Features

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591: max. 350 m³/h
- Noise max. Normal Level: 72 dB*

Features

- Push button control operation
- 3 power levels
- 2 x LED 4W
- Colour Temperature: 3000 K
- 2 metal grease filter cassettes
- For wall mounted installation or suspended beneath a reduced height wall cupboard

Design

- Stainless steel
- Conventional hood
- Push button control operation
- Mechanical controls


Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Extraction rate according to EN 61591: max. 350 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Noise max. Normal Level: 72 dB*
- Power rating: 146 W
- Light Intensity: 45 lux
- Colour Temperature: 3000 K
- Electrical cable length 1.45 m
- Diameter pipe Ø 120 mm (Ø 100 mm enclosed)
- Dimensions exhaust air (HxWxD): 150-150 x 600 x 482 mm
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: E*
- Lighting Efficiency Class: E*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 93.3 kWh/year*

* In accordance with the EU-Regulation No 65/2014

N 30, Built-under cooker hood, 60 cm, Stainless steel
D61LAC1N0B

Dimensioned drawings

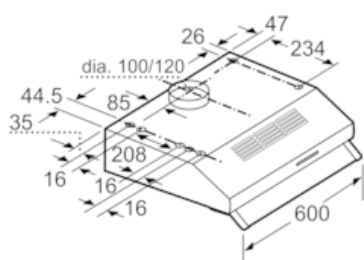

measurements in mm