

N 50, WALL-MOUNTED COOKER HOOD, 60 CM,
CLEAR GLASS BLACK PRINTED, BLACK
D63IDF1S0B



- ✓ Powerful Extraction: efficient capacitor motor ensures kitchen free from grease, steam and odours.
- ✓ Touch Control – Choose power level 1-3 by a fingerswipe on the flat integrated control panel
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ Enjoy fresh air continuously, thanks to our advanced dual-filter system.
- ✓ Easy Clean - Easy to clean surfaces without visible screws on the outside of the hood

Features

Technical Data

Color chimney: Black
 Typology: Wall-mounted
 Length electrical supply cord: 150 cm
 Required niche size for installation (HxWxD): GENERAL_N_A mm
 Height of the chimney: GENERAL_N_A mm
 Height of the appliance: 309 mm
 Minimum distance above an electric hob: 450 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 10.3 kg
 Type of control: Electronic
 Number of speed settings: 3
 Maximum output air extraction: 561 m³/h
 Maximum output recirculating air: 507 m³/h
 Maximum Air flow: 561 m³/h
 Number of lights: 2
 Noise level: 63 dB(A) re 1 pW
 Diameter of air outlet: 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242004293316
 Connection Rating: 223 W
 Fuse protection: 4 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: GB plug
 Installation typology: Wall-mounted



Optional accessories

Z51GIB1X6	Long-life Clean Air odor filter (replace
Z51GII1X6	Long-life Clean Air recirculation kit
Z51GIV1X6	Long-life Clean Air recirc. kit (chimles
Z51G XK0S1	Chimney extension 1000 mm
Z51GXLOS1	Chimney extension 1500 mm
Z53XXH1X2	backpressure flap standard
Z53XXQ1X1	reducer

N 50, WALL-MOUNTED COOKER HOOD, 60 CM, CLEAR GLASS BLACK PRINTED, BLACK D63IDF1SOB

Features

Design:

- Inclined glass common design
- wall-mounted
- Black glass
- Glass plate: Black
- Suitable for ducted extraction and recirculation

Core Features:

- Capacitor motor
- 2 x LED 1.5W
- 1 metal grease filter(s).

Comfort Features:

- Electronic control via Touch control, backlit
- 3 power levels

Cleaning Comfort:

- Large opening angle of the glass plate for an easy filter accessibility and easy cleaning.
- Easy to clean smooth surfaces and materials.
- metal grease filter dishwasher-safe

Exhaust Mode:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 240 m³/h; noise level 45 dB(A) re1pW
- Speed 2: extraction rate 444 m³/h; noise level 59 dB(A) re1pW
- Speed 3: extraction rate 561 m³/h; noise level 63 dB(A) re1pW
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 72.9 kWh/year*
- Blower Efficiency Class: C*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: E*

Recirculation Mode:

- For recirculation operation Long-life Clean Air recirculation kit (accessory) needed.
- In recirculation operation, chimless use possible
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
- Speed 1: extraction rate 217 m³/h; noise level 54 dB(A) re1pW
- Speed 2: extraction rate 426 m³/h; noise level 69 dB(A) re1pW
- Speed 3: extraction rate 506 m³/h; noise level 73 dB(A) re1pW

Technical Information and Sustainability:

- Consumption data:
- Power rating: 223 W
- Voltage: Nominal voltage: 220 - 240 V

Sustainability:

- Silent blower technology
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times


Planning and Installation Information:

- Dimensions exhaust air (HxWxD): 741-956 x 590 x 399 mm
- Dimensions recirculating (HxWxD): 776-991 x 590 x 399 mm
- Diameter pipe Ø 150mm
- Electrical cable length 1.5 m
- If connecting to an existing exhaust, a reducer piece from 150mm to 120mm can be ordered as special accessory, if needed.
- In exhaust mode a backpressure flap (Z53XXH1X2) is recommended.


N 50, WALL-MOUNTED COOKER HOOD, 60 CM,
CLEAR GLASS BLACK PRINTED, BLACK
D631DF1S0B

Dimensioned drawings


Measurements in mm
Appliance in exhaust air mode

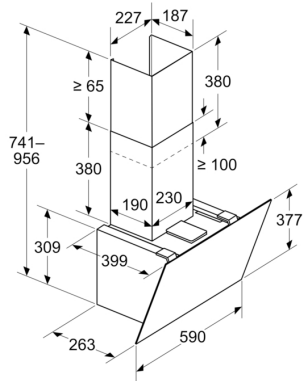

Measurements in mm
Appliance in circulated air mode

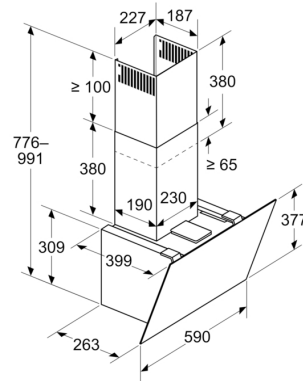


Measurements in mm
Appliance in circulated air mode without duct

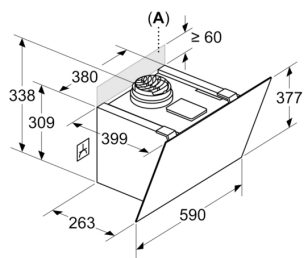

Socket can be fitted to the side of or above the appliance

A: Socket only outside the marked area

Measurements in mm

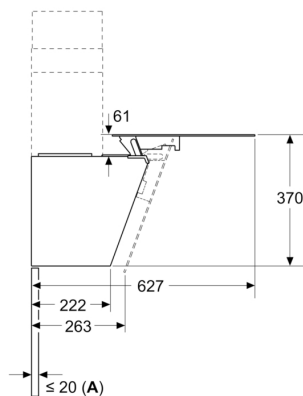

A: Max. back wall thickness

Dimensioned drawings

