

N 30, WALL-MOUNTED COOKER HOOD, 75 CM,  
 STAINLESS STEEL  
 D72PBC0N0B



A++  
D

Z5138X1	Standard odor filter (replacement)
Z5138X5	Standard recirculation kit
Z5904N0	Chimney extension 500 mm
Z5904N5	Chimney extension 750 mm

The pyramid hood is a traditionally designed hood and a trademark design of our collections.

✓ LED Lighting – Clear illumination while you cook.

Color chimney:	.....Stainless steel
Typology:	.....Wall-mounted
Length electrical supply cord:	.....130.0 cm
Height of the chimney:	.....553-730/573-730 mm
Height of the appliance:	.....246 mm
Minimum distance above an electric hob:	.....550 mm
Minimum distance above a gas hob:	.....650 mm
Net weight:	.....8.0 kg
Type of control:	.....mechanical
Number of speed settings:	.....3
Maximum output air extraction:	.....365 m³/h
Maximum output recirculating air:	.....213 m³/h
Maximum Air flow:	.....365 m³/h
Number of lights:	.....2
Noise level:	.....65 dB(A) re 1pW
Diameter of air outlet:	.....150 / 120 mm
Grease filter material:	.....Washable aluminium
EAN code:	.....4242004221517
Connection Rating:	.....100 W
Fuse protection:	.....10 A
Voltage:	.....220-240 V
Frequency:	.....50; 60 Hz
Plug type:	.....GB plug
Installation typology:	.....Wall-mounted



4 242004 221517

N 30, WALL-MOUNTED COOKER HOOD, 75 CM,  
STAINLESS STEEL  
D72PBC0N0B

**Key performance features:**

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 65 dB dB\*

**Features**

- Push button control operation
- 3 power levels
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes
- Installation: wall

**Design**

- Chimney hood
- Mechanical controls

**Performance/technical information**


- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m<sup>3</sup>/h according to EN 61591
- Extraction rate in recirculation mode:
- Max. normal use: 213 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 65 dB(A) re 1 pW
- Noise level in recirculation mode:
- Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 94 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 799-975 x 750 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 750 x 500 mm
- Blower Efficiency Class: E\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: D\*
- Average Energy Consumption: 53.1 kWh/year\*

**Optional accessories**


- Recirculating kit Z5138X1

\* In accordance with the EU-Regulation No 65/2014


N 30, WALL-MOUNTED COOKER HOOD, 75 CM,  
 STAINLESS STEEL  
 D72PBC0N0B

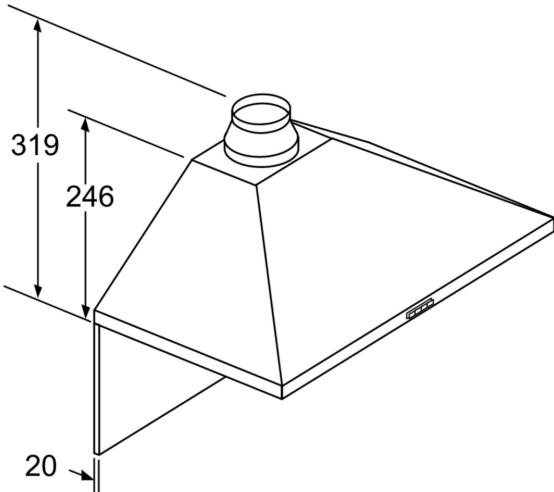


If a back panel is used,  
 the design of the appliance  
 must be considered.  
 measurements in mm

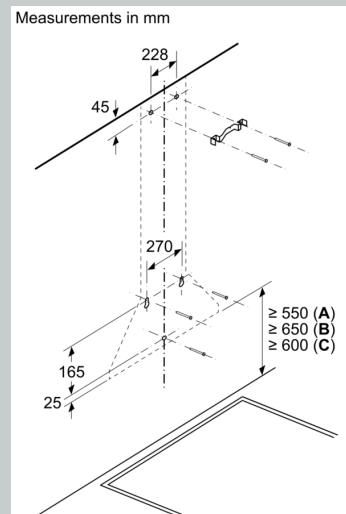

A: Electric  
 B: Gas - from upper edge of pan support  
 C: Electric - for Australia and New Zealand

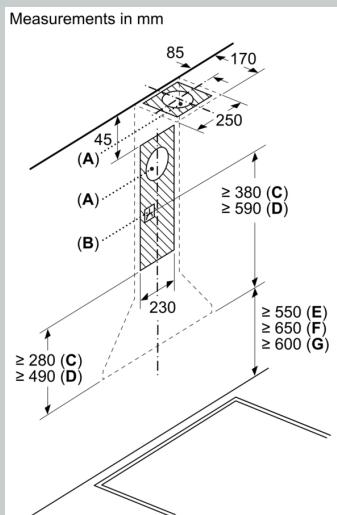

A: Exhaust-air outlet  
 B: Socket  
 C: Exhaust air  
 D: Circulated air  
 E: Electric  
 F: Gas - from upper edge of pan support  
 G: Electric - for Australia and New Zealand

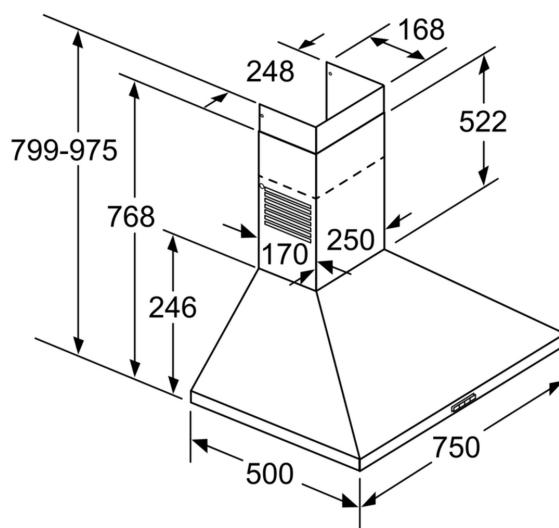

measurements in mm