


N 50, Wall-mounted cooker hood, 90 cm
D79MH52N1B



COOKING PASSION SINCE 1877



A+

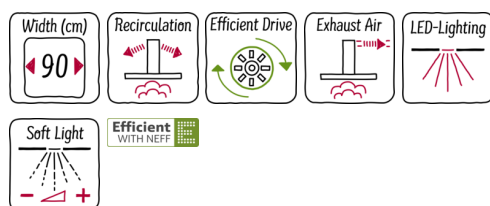

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 582-908/582-1018
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 18.068
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 460
 Boost position output recirculating (m³/h) : 440.0
 Boost position air extraction (m³/h) : 730
 Number of lights (Stck) : 3
 Noise level (dB(A) re 1 pW) : 55
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable aluminium
 EAN code : 4242004183655
 Connection rating (W) : 139
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Wall-mounted



4 242004 183655

Optional accessories

Z50XP0X0	Long Life odor filter (replacement)
Z5102X1	Standard odor filter (replacement)
Z5102X5	Standard recirculation kit
Z5170X1	CleanAir active carbon filter spare part
Z5276X0	CleanAir Recirculation Kit
Z5895N0	Stainless steel back panel
Z5906N1	Chimney extension 1000 mm
Z5916N1	Chimney extension 1500 mm

N 50, Wall-mounted cooker hood, 90 cm

D79MH52N1B

Features

Features

- For wall mounted installation
- 7 segment LED display
- 3 x LED lights
- softLight with dimmer function
- 3 metal grease filter cassettes
- Saturation indicator for grease filter
- metal grease filter
- Interval operation
- 3 power levels and 2 intensive settings
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Additional noise insulation
- Efficient BLDC-technology

Design

- Stainless steel
- Stainless steel
- Chimney hood
- Box slimline brand design
- Soft touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Twin channel high performance fan motor
- In recirculation operation chimless use possible
- Easy mounting system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 460 m³/h
Intensive 730 m³/h
- Power rating: 139 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB*
- Light Intensity: 897 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
689 x 900 x 500 mm - mounting with outer chimney
809-1139 x 900 x 500 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 32.5 kWh/year*

Optional accessories

- Recirculating kit Z5102X1, Z5102X5, Z5276X0, Z5906N1, Z5916N1

* In accordance with the EU-Regulation No 65/2014