


N 90, Wall-mounted cooker hood, 90 cm, Stainless steel
D79MT86N1B



COOKING PASSION SINCE 1877



A

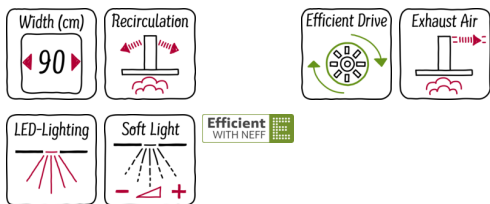

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 582-908/582-1018
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 20.613
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 600
 Boost position output recirculating (m³/h) : 480.0
 Boost position air extraction (m³/h) : 790
 Number of lights (Stck) : 3
 Noise level (dB(A) re 1 pW) : 66
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable stainless steel
 EAN code : 4242004183679
 Connection rating (W) : 269
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Wall-mounted



Optional accessories

- Z50XP0X0 Long Life odor filter (replacement)
- Z5102X1 Standard odor filter (replacement)
- Z5102X5 Standard recirculation kit
- Z5170X1 CleanAir active carbon filter spare part
- Z5276X0 CleanAir Recirculation Kit
- Z5895N0 Stainless steel back panel
- Z5906N1 Chimney extension 1000 mm
- Z5916N1 Chimney extension 1500 mm

N 90, Wall-mounted cooker hood, 90 cm, Stainless steel
D79MT86N1B

Features

Features

- For wall mounted installation
- 7 segment LED display
- 3 x LED lights
- softLight with dimmer function
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Stainless steel filter cover, metal grease filter
- Interval operation
- 3 power levels and 2 intensive settings
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Additional noise insulation
- 1000EE
- Rim ventilation

Design

- Stainless steel
- Stainless steel
- Chimney hood
- Box slimline brand design
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Twin channel high performance fan motor
- In recirculation operation chimless use possible
- Easy mounting system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 600 m³/h
Intensive 790 m³/h
- Power rating: 269 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 66 dB (A) re 1pW
- Noise max. Normal Level: 66 dB*
- Light Intensity: 897 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
689 x 900 x 500 mm - mounting with outer chimney
809-1139 x 900 x 500 mm - mounting with telescopic chimney
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 33.3 kWh/year*

Optional accessories

- Recirculating kit Z5102X1, Z5102X5, Z5276X0, Z5906N1, Z5916N1

* In accordance with the EU-Regulation No 65/2014