# N 30, WALL-MOUNTED COOKER HOOD, 80 CM, CLEAR GLASS BLACK PRINTED, BLACK
D83IDK1S0B

## Optional accessories

| | |
|---|---|
| Z51GIA1X3 | Standard odor filter (replacement) |
| Z51GIU1X3 | Standard recirculation kit |

The Inclined Hood with low-noise motor and Touch Control for an odor- and noisefree kitchen.

- √ Reduced Noise: our optimised motor guarantees a quiet cooking experience.
- √ Intensive speed setting: increases the extraction rate when the steam gets intense
- √ Touch Control: an integrated flat surface control panel for smooth operation with a fingerswipe.
- √ LED Lighting – Clear illumination while you cook.

## Features

**Technical Data**

Color chimney: ..... Black
Typology: .....Wall-mounted
Length electrical supply cord: ..... 150 cm
Height of the appliance: .....325 mm
Minimum distance above an electric hob: .....450 mm
Minimum distance above a gas hob: .....650 mm
Net weight: ..... 11.3 kg
Type of control: ..... Electronic
Number of speed settings: .....3-stages + intensive setting
Maximum output air extraction: .....430 m³/h
Boost position output recirculating: .....550.0 m³/h
Maximum output recirculating air: ..... 445 m³/h
Boost position air extraction: .....550 m³/h
Maximum Air flow: ..... 430 m³/h
Number of lights: .....2
Noise level: ..... 60 dB(A) re 1 pW
Diameter of air outlet: .....150 mm
Grease filter material: ..... Washable aluminium
EAN code: .....4242004273332
Connection Rating: .....223 W
Fuse protection: .....4 A
Voltage: .....220-240 V
Frequency: .....50 Hz
Plug type: ..... GB plug
Installation typology: .....Wall-mounted

4 242004 273332

# N 30, WALL-MOUNTED COOKER HOOD, 80 CM, CLEAR GLASS BLACK PRINTED, BLACK
# D83IDK1S0B

## Features

Design:
- Inclined glass common design
- wall-mounted
- Black glass
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed

Core Features:
- Capacitor motor
- 2 x LED lights
- Colour Temperature: 4000 K
- Light Intensity: 127 lux
- 1 metal grease filter(s).

Comfort Features:
- Electronic control via Touch control, backlighted
- 3 speeds plus intensive
- Automatic reset from intensive to normal setting after 5 min
- Saturation indicator for metal and charcoal filter

Cleaning Comfort:
- Large opening angle of the glass plate with locking function for an easy filter accessibility and easy cleaning.
- Easy to clean smooth surfaces and materials.
- metal grease filter dishwasher-safe

Performance Exhaust:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 220 m3/h; noise level 46 dB (A) re1pW Speed 2: extraction rate 315 m3/h; noise level 53 dB (A) re1pW Speed 3: extraction rate 430 m3/h; noise level 60 dB (A) re1pW Intensive 1: extraction rate 550 m3/h; noise level 65 dB (A) re1pW

Performance Recirculation:
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 215 m3/h; noise level 51 dB (A) re1pW Speed 2: extraction rate 300 m3/h; noise level 61 dB (A) re1pW) Speed 3: extraction rate 445 m3/h ; noise level 69 dB (A) re1pW) Intensive Speed 1: extraction rate550 m3/h; noise level 72 dB (A) re1pW)

Technical Information and Sustainability:
- Consumption data:
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 43.8 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: E*
- Power rating: 223 W
- Voltage: Nominal voltage: 220 - 240 V

Planning and Installation Information:
- Dimensions exhaust air (HxWxD): 690-900 x 790 x 325 mm
- Dimensions recirculating (HxWxD): 720-975 x 790 x 325 mm
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Electrical cable length 1.5 m
- Back-pressure flap: Yes

# N 30, WALL-MOUNTED COOKER HOOD, 80 CM, CLEAR GLASS BLACK PRINTED, BLACK
# D83IDK1S0B

## Dimensioned drawings

Measurements in mm

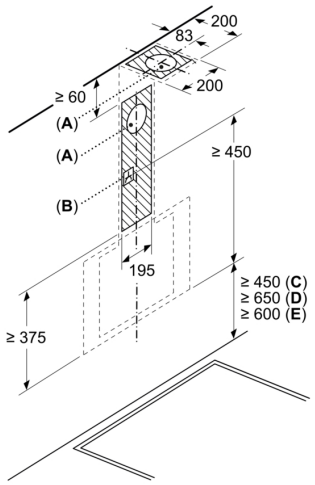


**A:** Exhaust-air outlet
**B:** Socket
**C:** Electric
**D:** Gas - from upper edge of pan support

**E:** Electric - for Australia and New Zealand

Measurements in mm
**Wall installation with chimney**

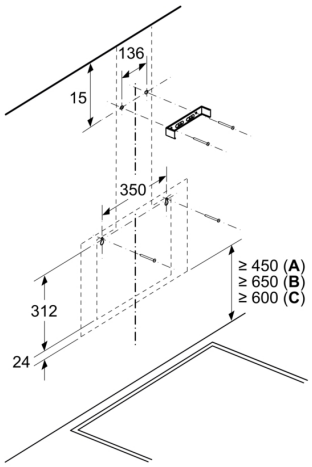


**A:** Electric

**B:** Gas - from upper edge of pan support

**C:** Electric - for Australia and New Zealand

Measurements in mm

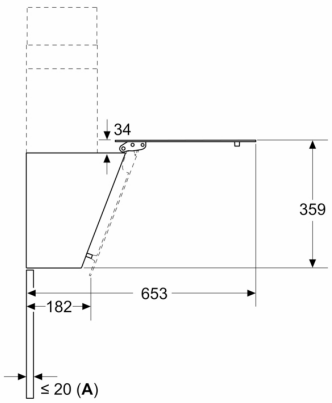


**A:** Max. back wall thickness

Measurements in mm
**Appliance in exhaust air mode**

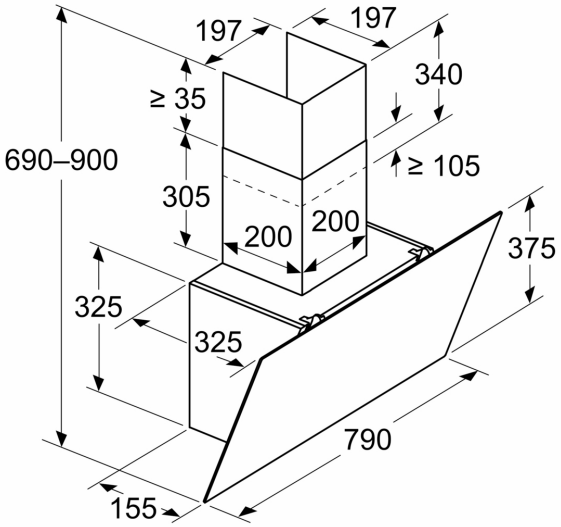

## Dimensioned drawings
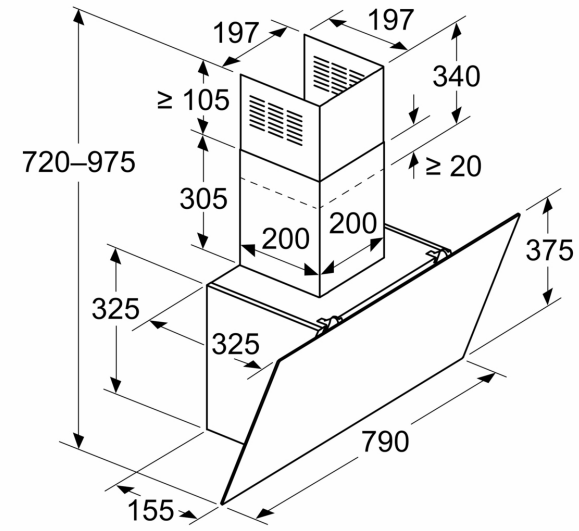
Measurements in mm
**Appliance in circulated air mode**