


N 50, Wall-mounted cooker hood, 80 cm, clear glass black printed
D851BE1S0B

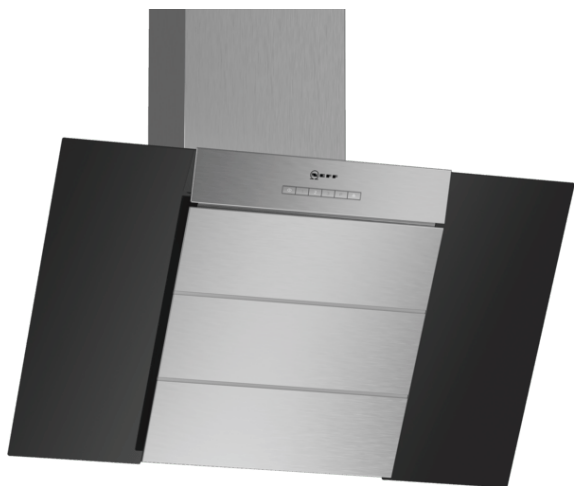

B

The design hood with an inclined front and high power ensures headroom while cooking.

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Reduced Noise: the low-noise motor makes it possible to listen to your own kitchen story

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 323
 Minimum distance above an electric hob : 450
 Minimum distance above a gas hob : 600
 Net weight (kg) : 23.553
 Type of control : Electronic
 Maximum output air extraction (m³/h) : 409
 Boost position output recirculating (m³/h) : 565.0
 Maximum output recirculating air (m³/h) : 386
 Boost position air extraction (m³/h) : 676
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 57
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable aluminium
 EAN code : 4242004230618
 Connection rating (W) : 263
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

Z50XPOX0 Long Life odor filter (replacement)
 Z51AII1X6 Clean Air Plus recirculation kit
 Z51AIROX0 Long Life recirculation kit (chimless)
 Z51AISOX0 Long Life recirculation kit
 Z51AIV1X6 Clean Air Plus recirc. kit (chimless)
 Z51AXC1N6 Clean Air Plus recirc. kit external
 Z51AXK0N0 Chimney extension 1000 mm
 Z51AXL0N0 Chimney extension 1500 mm
 Z53XXB1X6 Clean Air Plus odor filter (replacement)



4 242004 230618

N 50, Wall-mounted cooker hood, 80 cm, clear
glass black printed
D851BE1SOB



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 408 m³/h
Intensive 676 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 57 dB dB*

Features

- Soft touch control
- 3 speeds plus intensive
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

Design

- Chimney hood
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 max. 676 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 57 dB(A) re 1 pW
Intensive: 67 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 57 dB (A) re 1pW
- Extraction rate in recirculation mode:
Max. normal use: 386 m³/h
Intensive: 565 m³/h
- Noise levels in recirculation mode:
Max. normal use: 67 dB(A) re 1 pW
Intensive: 75 dB(A) re 1 pW
- Power rating: 263 W
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 898-1168 x 790 x 467 mm
- Dimensions recirculating (HxWxD): 958-1228 x 790 x 467 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1088 x 790 x 467 mm - mounting with outer chimney
1158-1428 x 790 x 467 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: B*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 56.4 kWh/year*

Optional accessories

- Recirculating kit Z50XXPOX0

* In accordance with the EU-Regulation No 65/2014

N 50, Wall-mounted cooker hood, 80 cm, clear glass black printed
D851BE1SOB

Dimensioned drawings

