

N 50, WALL-MOUNTED COOKER HOOD, 90 CM,
BLACK
D94BHM1S5B



B

Optional accessories

Z50XXP0X0	Long Life odor filter (replacement)
Z51DXA0X0	Standard odor filter (replacement)
Z51DXB1X4	Clean Air Standard odor filter (repl.)
Z51DXI1X4	Clean Air Standard recirculation kit
Z51DXI1X6	Clean Air Plus recirculation kit
Z51DXU0X0	Standard recirculation kit
Z51FXJ0X0	Long Life recirculation kit
Z53XXB1X6	Clean Air Plus odor filter (replacement)

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology
- ✓ Touch Control: an integrated flat surface control panel for smooth operation with a fingerswipe.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.

Features

Technical Data

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	583-912/583-1022 mm
Height of the appliance:	53 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Net weight:	13.4 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Maximum output air extraction:	372 m³/h
Boost position output recirculating:	441 m³/h
Maximum output recirculating air:	337 m³/h
Boost position air extraction:	604 m³/h
Maximum Air flow:	372 m³/h
Number of lights:	2
Noise level:	60 dB(A) re 1 pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242004280002
Connection Rating:	220 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



4 242004 280002

N 50, WALL-MOUNTED COOKER HOOD, 90 CM,
BLACK
D94BHM1S5B

Features

- D94BHM1S5B

Design

- Chimney hood
- Box design
- 90 cm wide
- Installation: wall
- Black
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm

Performance/technical information



- 3 speeds plus intensive via Touch control
- Extraction rate exhaust air according to EN 61591:
- max. normal use 372 m³/h, intensive 604 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 60dB(A) re 1 pW
 - Intensive: 70 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
 - Extraction rate in recirculation mode: Max. normal use: 337 m³/h
 - Intensive: 441 m³/h
- Noise level in recirculation mode: Max. normal use: 70dB(A) re 1 pW
- Intensive: 74 dB(A) re 1 pW
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 48.5 kWh/year*
- Electrical cable length 1.3 m
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- Power rating: 220 W
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

Special features

- Electronic controls
- Capacitor energy efficient
- Automatic intensive revert (6mins)
- Twin channel high performance fan motor
- 3 metal grease filter cassettes

N 50, WALL-MOUNTED COOKER HOOD, 90 CM,
 BLACK
 D94BHM1S5B

Dimensioned drawings

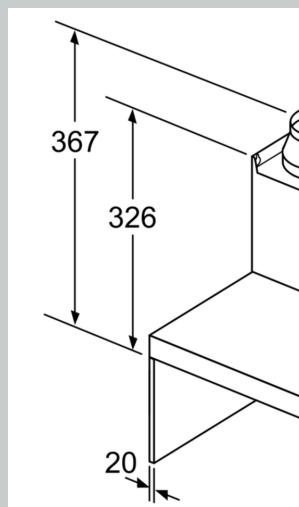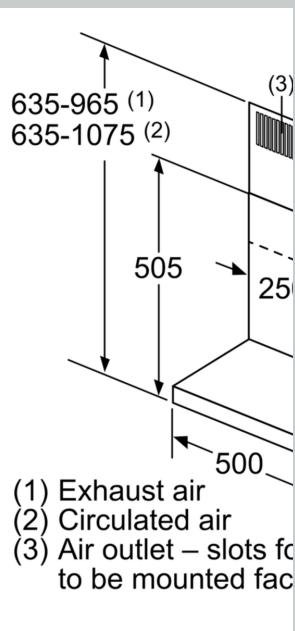

If a back panel is used the design of the appliance must be considered.

