

N 70, Integrated Design Hood, 90 cm, White with LED backlit
glass panel
D94XAF8N0B



COOKING PASSION SINCE 1877



B

Our invisible integrated design hood - perfectly integrated with extra storage for easy access items, such as spices and herbs.

✓ LED Lighting – Clear illumination while you cook.

Features

Technical Data

Typology : Built-in/Built-under
Length of electrical supply cord : 150 cm
Min. required niche size for installation (HxWxD) : 356mm x 862.0mm x 310mm mm
Minimum distance above an electric hob : 500 mm
Minimum distance above a gas hob : 650 mm
Net weight : 14.1 kg
Type of control : mechanical
Number of speed settings : 3
Maximum output air extraction : 610 m³/h
Maximum output recirculating air : 585 m³/h
Number of lights (Stck) : 2
Noise level : 70 dB(A) re 1 pW
Diameter of air outlet : 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004243632
Connection rating : 255 W
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : Euro plug w/ earthing 16A/250V
Installation type : Built-in



4 242004 243632

Optional accessories

Z51IBG0N1	Chimney extension 120mm
Z51IBN0N0	Chimney extension 187-360mm
Z51IBU0X0	Standard recirculation kit
Z51IMA0X0	Standard odor filter (replacement)
Z51ITD1X1	Long Life recirculation kit external
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external

*N 70, Integrated Design Hood, 90 cm, White with
LED backlit glass panel
D94XAF8NOB*



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 610 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 70 dB dB*

Features

- 3 power levels via rotary switch, retractable
- White with LED backlit glass panel
- 2 x LED 2.5W
- Colour Temperature: 3500 K
- Filter cover glass, metal grease filter
- 2 metal grease filter cassettes
- Installation: Cupboard 90 cm

Design

- Adjustable glass visor for additional vapour capture
- Filler strip for an individual depth adjustment in cupboard up to maximum 350 mm.
- Mechanical controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 610 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 70 dB(A) re 1 pW
- Power rating: 255 W
- Light Intensity: 76 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions (HxWxD): 356 x 894 x 310 mm
- Built-in dimensions (HxWxD): 356 x 862 x 310-350 mm
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 61 kWh/year*

Optional accessories


- Recirculating kit Z51IBUOX0

* In accordance with the EU-Regulation No 65/2014


*N 70, Integrated Design Hood, 90 cm, White with
LED backlit glass panel
D94XAF8NOB*

Dimensioned drawings


measurements in mm
side view

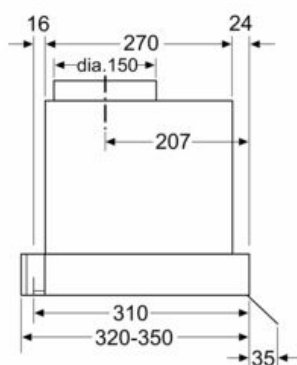

measurements in mm
front view

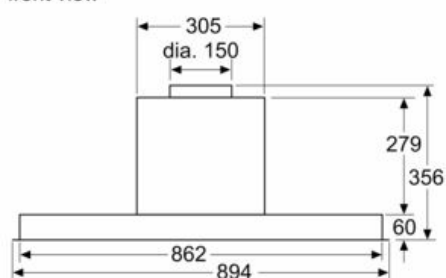


measurements in mm

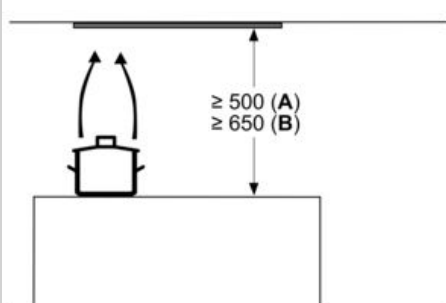

From upper edge of pan support:
A: Electric
B: Gas

measurements in mm

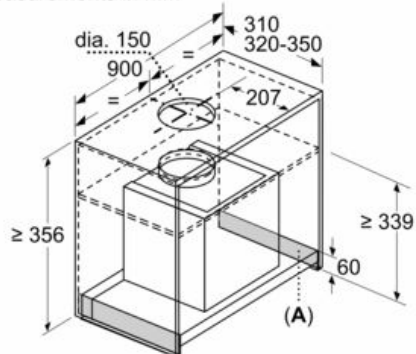

A: Area without hinge