


N 90, Wall-mounted cooker hood, 90 cm, clear glass black printed
D95FMS1NOB



A

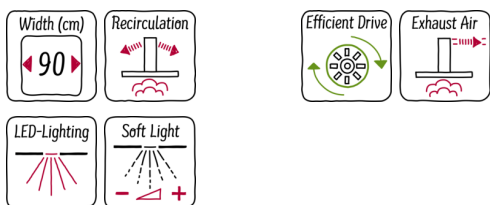

The high-powered flat slimline hood with a flat front panel ensures you have enough space to get close to your cooking

- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 430
 Minimum distance above an electric hob : 450
 Minimum distance above a gas hob : 600
 Net weight (kg) : 23.173
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 394
 Boost position output recirculating (m³/h) : 527.0
 Boost position air extraction (m³/h) : 717
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 57
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 EAN code : 4242004221555
 Connection rating (W) : 143
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted



Optional accessories

- Z50XP0X0 Long Life odor filter (replacement)
- Z51AFA0X0 Standard odor filter (replacement)
- Z51AFROX0 Long Life recirculation kit (chimless)
- Z51AFS0X0 Long Life recirculation kit
- Z51AFT0X0 Standard recirculation kit (chimless)
- Z51AFU0X0 Standard recirculation kit
- Z51AXK0N0 Chimney extension 1000 mm
- Z51AXL0N0 Chimney extension 1500 mm
- Z53XXB1X6 Clean Air Plus odor filter (replacement)

*N 90, Wall-mounted cooker hood, 90 cm, clear
glass black printed
D95FMS1NOB*

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 394 m³/h Intensive 717 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 57 dB dB*

Features

- Touch control
- LED display
- 3 power levels and 2 intensive settings
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- softLight with dimmer function
- Noise reduction function
- Interval operation
- Automatic after running (Automatic after running (10 minutes))
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

Design

- Chimney hood
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 max. 394 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air: Max. normal use: 57 dB(A) re 1 pW Intensive: 70 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 57 dB (A) re 1pW
- Power rating: 143 W
- Light Intensity: 225 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 969-1239 x 895 x 263 mm
- Dimensions recirculating (HxWxD): 1029-1299 x 895 x 263 mm
- Dimensions recirculating with CleanAir module (HxWxD): 1159 x 895 x 263 mm - mounting with outer chimney 1229-1499 x 895 x 263 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 37.8 kWh/year*

Optional accessories

- Recirculating kit Z50XXPOX0

* In accordance with the EU-Regulation No 65/2014

N 90, Wall-mounted cooker hood, 90 cm, clear glass black printed
D95FMS1NOB

Dimensioned drawings

