


N 70, Wall-mounted cooker hood, 90 cm, Green  
D95FRM1G0B



COOKING PASSION SINCE 1877

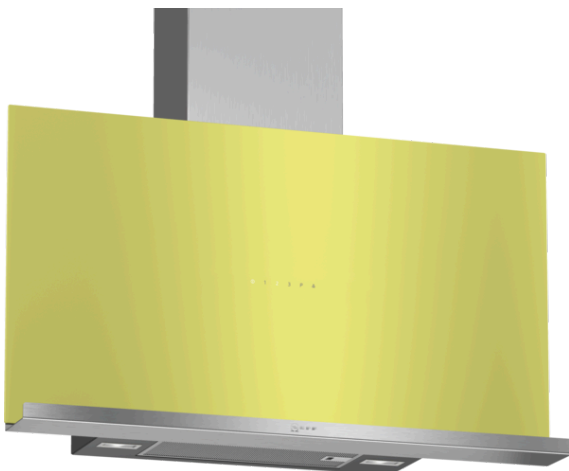

A



The Creative Slimline hood does not only offer high-performance but is also magnetic, can be written on and can be used as a bookshelf

- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights

#### Features

##### Technical Data

Typology : Chimney  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 430  
 Minimum distance above an electric hob : 450  
 Net weight (kg) : 22.870  
 Type of control : Electronic  
 Maximum output air extraction (m<sup>3</sup>/h) : 405  
 Boost position output recirculating (m<sup>3</sup>/h) : 510.0  
 Boost position air extraction (m<sup>3</sup>/h) : 739  
 Number of lights (Stck) : 2  
 Noise level (dB(A) re 1 pW) : 58  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable aluminium  
 EAN code : 4242004210146  
 Connection rating (W) : 143  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 60; 50  
 Plug type : GB plug  
 Installation type : Wall-mounted

#### Optional accessories

Z50XP0X0 Long Life odor filter (replacement)  
 Z5170X1 CleanAir active carbon filter spare part  
 Z51AFA0X0 Standard odor filter (replacement)  
 Z51AFROX0 Long Life recirculation kit (chimless)  
 Z51AFS0X0 Long Life recirculation kit  
 Z51AFT0X0 Standard recirculation kit (chimless)  
 Z51AFU0X0 Standard recirculation kit  
 Z51AXC0N0 CleanAir Recirculation Kit  
 Z51AXK0N0 Chimney extension 1000 mm  
 Z51AXL0N0 Chimney extension 1500 mm  
 Z53XXB1X6 Clean Air Plus odor filter (replacement)



4 242004 210146

# N 70, Wall-mounted cooker hood, 90 cm, Green

## D95FRM1GOB

### Features

#### Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 404 m<sup>3</sup>/h  
Intensive 739 m<sup>3</sup>/h
- Noise max. Normal Level: 58 dB\*

#### Features

- Touch control
- LED display
- 3 speeds plus intensive
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

#### Design

- Green Glass
- Flat slimline design
- Chimney hood
- Touch control
- Electronic controls

#### Performance/technical information

- Installation with gas hob not recommended
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 404 m<sup>3</sup>/h  
Intensive 739 m<sup>3</sup>/h
- Extraction rate according to EN 61591 max. 404 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 58 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 58 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)  
Intensive: 71 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 58 dB (A) re 1pW
- Noise max. Normal Level: 58 dB\*
- Power rating: 143 W
- Light Intensity: 225 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 981-1251 x 890 x 362 mm
- Dimensions recirculating (HxWxD): 1041-1311 x 890 x 362 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
1171 x 890 x 362 mm - mounting with outer chimney  
1241-1511 x 890 x 362 mm - mounting with telescopic chimney
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 39 kWh/year\*

#### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014