

N 70, WALL-MOUNTED COOKER HOOD, 90 CM,  
CLEAR GLASS BLACK PRINTED  
D95FRM1S0B



A



The Creative Slimline hood does not only offer high-performance but is also magnetic, can be written on and can be used as a bookshelf

- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Touch Control: an integrated flat surface control panel for smooth operation with a fingerswipe.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.

Z50XP0X0	Long Life odor filter (replacement)
Z51AFB1X6	Clean Air Plus odor filter (replacement)
Z51AF11X6	Clean Air Plus recirculation kit
Z51AFR0X0	Long Life recirculation kit (chimless)
Z51AFS0X0	Long Life recirculation kit
Z51AFV1X6	Clean Air Plus recirc. kit (chimless)
Z51AXC1N6	Clean Air Plus recirc. kit external
Z51AXK0N0	Chimney extension 1000 mm
Z51AXL0N0	Chimney extension 1500 mm
Z53XXB1X6	Clean Air Plus odor filter (replacement)
Z91AXE1S1	Chimney standard black

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the appliance:	430 mm
Minimum distance above an electric hob:	450 mm
Net weight:	22.7 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Maximum output air extraction:	405 m <sup>3</sup> /h
Boost position output recirculating:	404 m <sup>3</sup> /h
Maximum output recirculating air:	249 m <sup>3</sup> /h
Boost position air extraction:	739 m <sup>3</sup> /h
Maximum Air flow:	405 m <sup>3</sup> /h
Number of lights:	2
Noise level:	58 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242004210177
Connection Rating:	143 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	60; 50 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



N 70, WALL-MOUNTED COOKER HOOD, 90 CM,  
CLEAR GLASS BLACK PRINTED  
D95FRM1SOB

**Key performance features:**

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591  $\varnothing$  15 cm:
- max. Normal use 404 m<sup>3</sup>/h
- Intensive 739 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 58 dB dB\*

**Features**

- Touch control
- LED display
- 3 speeds plus intensive
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

**Design**

- Chimney hood
- Electronic controls

**Performance/technical information**

- Installation with gas hob not recommended
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Installation system: Wall fixing inclined/flat/cube
- Extraction rate according to EN 61591 max. 739 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 58 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 58 dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 58 dB (A) re 1 pW
- Power rating: 143 W
- Light Intensity: 225 lux
- Electrical cable length 1.3 m
- Diameter pipe  $\varnothing$  150 mm ( $\varnothing$  120 mm enclosed)
- Dimensions exhaust air (HxWxD): 981-1251 x 890 x 362 mm
- Dimensions recirculating (HxWxD): 1041-1311 x 890 x 362 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1171 x 890 x 362 mm - mounting with outer chimney
- 1241-1511 x 890 x 362 mm - mounting with telescopic chimney
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: A\*



- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 39 kWh/year\*

**Optional accessories**

- Recirculating kit Z50XXP0X0


\* In accordance with the EU-Regulation No 65/2014

N 70, WALL-MOUNTED COOKER HOOD, 90 CM,  
CLEAR GLASS BLACK PRINTED  
D95FRM1SOB

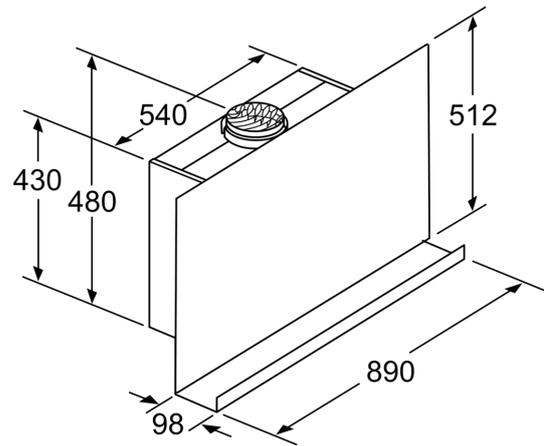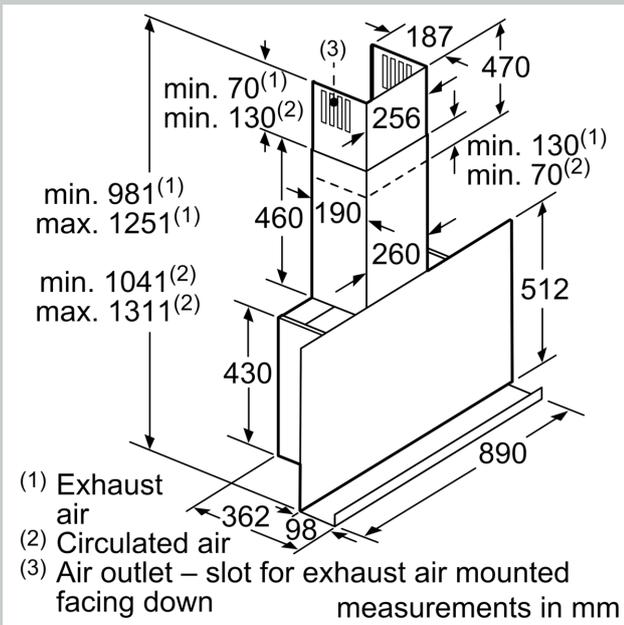


Appliance in circulated air mode  
without duct  
Circulated air set required

measurements in mm

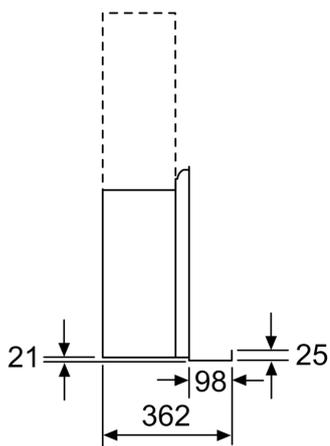

measurements in mm

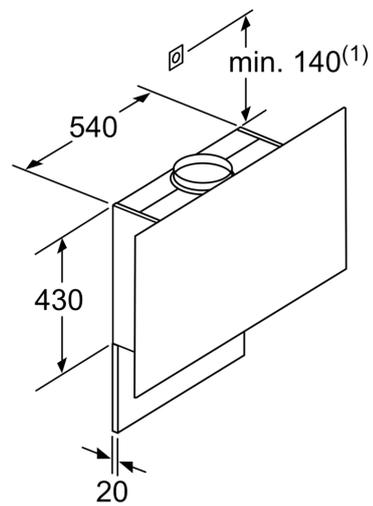

(1) Position of socket

Note the maximum thickness of the back panel.

measurements in mm

