


N 90, Wall-mounted cooker hood, 90 cm, clear glass black printed
D95FRW1SOB



B

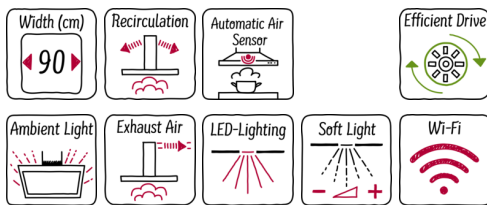

The Creative Slimline hood does not only offer high-performance but is also magnetic, can be written on and can be used as a bookshelf

- ✓ Ambient Light: choose from 31 colours to illuminate your kitchen wall behind the hood in the light that suits your style
- ✓ Sensor-controlled automatic system: focus on your cooking and keep the noise to a minimum thanks to the fully automatic hood control when the Wi-Fi compatible hob is switched on
- ✓ Climate Control Sensor: Detects the amount of steam and smells using a sensor attached to the motor and automatically sets the most effective power level to extract it
- ✓ Hob-Hood Control: conveniently control the hood directly from the hob (with Wi-Fi enabled hob)
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 430
 Minimum distance above an electric hob : 450
 Net weight (kg) : 28.470
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 394
 Boost position output recirculating (m³/h) : 527.0
 Boost position air extraction (m³/h) : 717
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 57
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 EAN code : 4242004210207
 Connection rating (W) : 150
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

Z50XP0X0 Long Life odor filter (replacement)
 Z5170X1 CleanAir active carbon filter spare part
 Z51AFA0X0 Standard odor filter (replacement)
 Z51AFR0X0 Long Life recirculation kit (chimless)
 Z51AFS0X0 Long Life recirculation kit
 Z51AFT0X0 Standard recirculation kit (chimless)
 Z51AFU0X0 Standard recirculation kit
 Z51AXC0N0 CleanAir Recirculation Kit
 Z51AXK0N0 Chimney extension 1000 mm
 Z51AXL0N0 Chimney extension 1500 mm
 Z53XXB1X6 Clean Air Plus odor filter (replacement)



*N 90, Wall-mounted cooker hood, 90 cm, clear
glass black printed
D95FRW1SOB*

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 394 m³/h
Intensive 717 m³/h
- Noise max. Normal Level: 57 dB*

Features

- Climate Control Sensor
- Ambient light
- Hob-Hood control (with Wi-Fi enabled hob)
- Touch control
- LED display
- 3 power levels and 2 intensive settings
- 2 x 3w LED Light
- Colour Temperature: 3500 K
- softLight with dimmer function
- Efficient BLDC technology
- Noise reduction function
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

Design

- Black Glass
- Flat slimline design
- Chimney hood
- Touch control
- Electronic controls

Performance/technical information

- Installation with gas hob not recommended
- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 394 m³/h
Intensive 717 m³/h
- Extraction rate according to EN 61591 max. 394 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 57 dB (A) re 1pW
- Noise max. Normal Level: 57 dB*
- Power rating: 150 W
- Light Intensity: 589 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 981-1251 x 890 x 362 mm
- Dimensions recirculating (HxWxD): 1041-1311 x 890 x 362 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1171 x 890 x 362 mm - mounting with outer chimney
1241-1511 x 890 x 362 mm - mounting with telescopic chimney
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 40 kWh/year*

Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014