


N 90, Island cooker hood, 90 cm, Stainless steel  
I79MT64N1B



COOKING PASSION SINCE 1877



A<sup>+</sup>

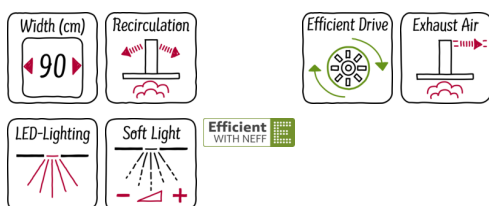

## Features

### Technical Data

Typology : Chimney  
Approval certificates : CE, VDE  
Length of electrical supply cord (cm) : 130  
Height of the chimney (mm) : 698-878/698-998  
Height of product, without chimney (mm) : 46  
Minimum distance above an electric hob : 550  
Minimum distance above a gas hob : 650  
Net weight (kg) : 30.127  
Type of control : Electronic  
Number of speed settings : 3-stage + 2 intensive  
Maximum output air extraction (m<sup>3</sup>/h) : 460  
Boost position output recirculating (m<sup>3</sup>/h) : 430.0  
Boost position air extraction (m<sup>3</sup>/h) : 870  
Number of lights (Stck) : 4  
Noise level (dB(A) re 1 pW) : 54  
Diameter of air outlet (mm) : 150 / 120  
Grease filter material : Washable stainless steel  
EAN code : 4242004183686  
Connection rating (W) : 172  
Current (A) : 10  
Voltage (V) : 220-240  
Frequency (Hz) : 60; 50  
Plug type : GB plug  
Installation type : Island



4 242004 183686

## Optional accessories

|           |  |
|-----------|--|
| Z50XXP0X0 | Long Life odor filter (replacement)      |
| Z5102X1   | Standard odor filter (replacement)       |
| Z5106X5   | Standard recirculation kit               |
| Z5170X1   | CleanAir active carbon filter spare part |
| Z5286X0   | CleanAir Recirculation Kit               |
| Z5909N1   | Chimney extension 1100 mm                |
| Z5912X0   | Adapter for roof inclination left/right  |
| Z5914X0   | Adapter for roof inclination front/back  |
| Z5919N1   | Chimney extension 1600 mm                |
| Z5921N0   | Extension for mounting kit 500 mm        |
| Z5923N0   | Extension for mounting kit 1000 mm       |

## N 90, Island cooker hood, 90 cm, Stainless steel

179MT64N1B

### Features

#### Features

- For ceiling mounted installation
- 7 segment LED display
- 4 x LED lights
- softLight with dimmer function
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- metal grease filter
- Interval operation
- 3 power levels and 2 intensive settings
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- Additional noise insulation
- Efficient BLDC-technology

#### Design

- Stainless steel
- Stainless steel
- Island chimney hood
- Box slimline brand design
- Touch control
- Electronic controls

#### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Twin channel high performance fan motor
- In recirculation operation chimless use possible
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 460 m³/h  
Intensive 870 m³/h
- Power rating: 172 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 54 dB (A) re 1pW
- Noise max. Normal Level: 54 dB\*
- Light Intensity: 888 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 744-924 x 900 x 600 mm
- Dimensions recirculating (HxWxD): 744-1044 x 900 x 600 mm
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 32.5 kWh/year\*

#### Optional accessories

- Recirculating kit Z5106X5, Z5102X1

\* In accordance with the EU-Regulation No 65/2014

N 90, Island cooker hood, 90 cm, Stainless steel  
179MT64N1B

Dimensioned drawings

