


N 50, Island cooker hood, 90 cm, Stainless steel  
179SH52N0B



A

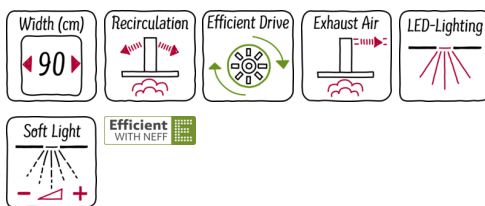

### Features

#### Technical Data

Typology : Chimney  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of the chimney (mm) : 698-878/698-998  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 27.937  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 460  
 Boost position output recirculating (m<sup>3</sup>/h) : 410.0  
 Boost position air extraction (m<sup>3</sup>/h) : 730  
 Number of lights (Stck) : 4  
 Noise level (dB(A) re 1 pW) : 54  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable aluminium  
 EAN code : 4242004174608  
 Connection rating (W) : 142  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation type : Island



4 242004 174608

### Optional accessories

Z50XXP0X0	Long Life odor filter (replacement)
Z5102X1	Standard odor filter (replacement)
Z5106X5	Standard recirculation kit
Z5170X1	CleanAir active carbon filter spare part
Z5286X0	CleanAir Recirculation Kit
Z5909N1	Chimney extension 1100 mm
Z5912X0	Adapter for roof inclination left/right
Z5914X0	Adapter for roof inclination front/back
Z5919N1	Chimney extension 1600 mm
Z5921N0	Extension for mounting kit 500 mm
Z5923N0	Extension for mounting kit 1000 mm

*N 50, Island cooker hood, 90 cm, Stainless steel*  
179SH52NOB

## Features

### Special features

- 7 segment LED display
- Interval operation
- Additional noise insulation

### Features

- 4 x LED lights
- 3 metal grease filter cassettes
- SoftLight with dimmer function

### Design

- 90 cm wide
- For ceiling mounted installation
- Soft touch control for extractor speeds and light
- Height adjustable

### Performance/technical information

- Suitable for ducted extraction and recirculation
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 460 m<sup>3</sup>/h  
Intensive 730 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at  
maximum normal setting: extraction rate: 54 dB (A) re 1pW (40  
dB (A) re 20 µPa sound pressure)
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- Automatic revert setting
- Additional noise insulation

N 50, Island cooker hood, 90 cm, Stainless steel  
179SH52NOB

Dimensioned drawings

