


N 50, Island cooker hood, 90 cm, clear glass  
189EH52N0B



COOKING PASSION SINCE 1877



A

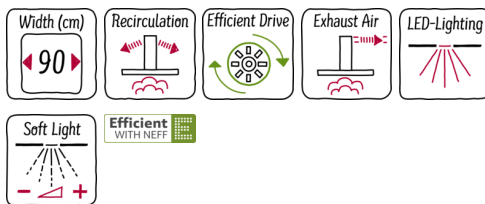

### Features

#### Technical Data

Typology : Chimney  
 Approval certificates : CE, VDE  
 Length of electrical supply cord (cm) : 130  
 Height of the chimney (mm) : 699-879/699-999  
 Height of product, without chimney (mm) : 52  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 28.358  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 430  
 Boost position output recirculating (m<sup>3</sup>/h) : 350.0  
 Boost position air extraction (m<sup>3</sup>/h) : 670  
 Number of lights (Stck) : 4  
 Noise level (dB(A) re 1 pW) : 57  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable aluminium  
 EAN code : 4242004174622  
 Connection rating (W) : 142  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation type : Island



### Optional accessories

- Z50XXP0X0 Long Life odor filter (replacement)
- Z5101X1 Standard odor filter (replacement)
- Z5105X5 Standard recirculation kit
- Z5170X1 CleanAir active carbon filter spare part
- Z5280X0 CleanAir Recirculation Kit
- Z5908N1 Chimney extension 1100 mm
- Z5911X0 Adapter for roof inclination left/right
- Z5913X0 Adapter for roof inclination front/back
- Z5918N1 Chimney extension 1600 mm
- Z5920N0 Extension for mounting kit 500 mm
- Z5922N0 Extension for mounting kit 1000 mm

*N 50, Island cooker hood, 90 cm, clear glass*  
189EH52NOB

## Features

### Special features

- 7 segment LED display
- Interval operation

### Features

- 4 x LED lights
- SoftLight with dimmer
- 1 metal grease filter cassette
- SoftLight with dimmer function

### Design

- 90 cm wide
- For ceiling mounted installation
- Glass canopy
- Clear glass
- Soft touch control for extractor speeds and light
- Height adjustable

### Performance/technical information

- Suitable for ducted extraction and recirculation
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 430 m<sup>3</sup>/h  
Intensive 670 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at  
maximum normal setting: extraction rate: 57 dB (A) re 1pW (43  
dB (A) re 20 µPa sound pressure)
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- Automatic revert setting

