


N 90, Ceiling cooker hood, 100 cm, White with LED backlit glass panel
190CN48W0

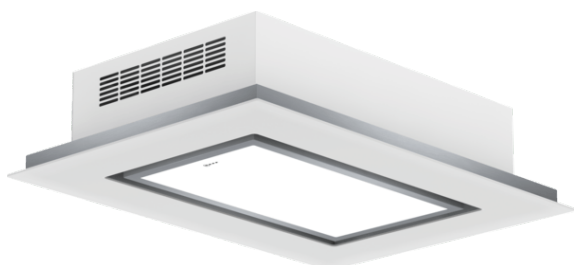

Optional accessories

Z54CP00X0

Plug & Play ceiling hood: easy ceiling installation in recirculation mode.

- ✓ Remote Control – comfortably control the ceiling hood with a remote
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Features

Technical Data

Typology : Traditional
 Approval certificates : CE
 Length of electrical supply cord (cm) : 0
 Minimum distance above an electric hob : 600
 Minimum distance above a gas hob : 900
 Net weight (kg) : 43.036
 Type of control : Electronic
 Boost position output recirculating (m3/h) : 850.0
 Maximum output recirculating air (m3/h) : 780
 Number of lights (Stck) : 1
 Diameter of air outlet (mm) : 150
 Grease filter material : Washable aluminium
 EAN code : 4242004201601
 Connection rating (W) : 192
 Current (A) : 16
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : no plug
 Installation type : Built-in



4 242004 201601

*N 90, Ceiling cooker hood, 100 cm, White with LED
backlit glass panel
190CN48W0*

Features

Features

- LED display
- 1 x LED glass filter panel
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Filter cover glass, metal grease filter
- 3 speeds plus intensive
- Interval operation
- Automatic after running (Automatic after running (30 mins))
- Automatic intensive revert (6mins)
- Rim ventilation

Design

- White
- Ceiling mounted hood
- Soft touch control
- Electronic controls
- Neutral white lights

Performance/technical information

- Suitable for recirculated extraction
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 850 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 780 m³/h
Intensive: 850 m³/h
- Noise levels in recirculation mode:
Max. normal use: 70 dB(A) re 1 pW
Intensive: 72 dB(A) re 1 pW
- Power rating: 192 W
- Light Intensity: 300 lux
- Colour Temperature: 4000 K
- Electrical cable length 0 m
- Dimensions recirculating (HxWxD): 245-245 x 1000 x 700 mm

N 90, Ceiling cooker hood, 100 cm, White with LED
backlit glass panel
190CN48W0

Dimensioned drawings

