


N 90, Ceiling cooker hood, 90 cm, Stainless steel  
199CM67NOB



A

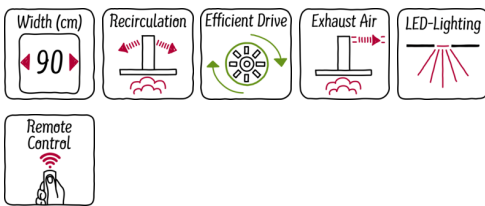

Optional accessories

Z5170X1	CleanAir active carbon filter spare part
Z5190X0	CleanAir Recirculation module

Flush with the ceiling, the stylish integrated ceiling hood leaves room for an open and clear kitchen

- ✓ Dimmer Function – dim the LED light conveniently with the button on the remote control
- ✓ Remote Control – comfortably control the ceiling hood with a remote
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air

Features

Technical Data

Typology : Traditional  
 Approval certificates : CE, NEMKO  
 Length of electrical supply cord (cm) : 140  
 Required niche size for installation (HxWxD) : 299mm x 875.0mm x 468mm  
 Minimum distance above an electric hob : 600  
 Minimum distance above a gas hob : 900  
 Net weight (kg) : 20.350  
 Type of control : Electronic  
 Maximum output air extraction (m<sup>3</sup>/h) : 505  
 Boost position output recirculating (m<sup>3</sup>/h) : 520.0  
 Boost position air extraction (m<sup>3</sup>/h) : 720  
 Number of lights (Stck) : 1  
 Noise level (dB(A) re 1 pW) : 59  
 Diameter of air outlet (mm) : 150  
 Grease filter material : Washable aluminium  
 EAN code : 4242004187455  
 Connection rating (W) : 185  
 Current (A) : 16  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50  
 Plug type : GB plug  
 Installation type : Built-in



# N 90, Ceiling cooker hood, 90 cm, Stainless steel

199CM67NOB

## Features

### Features

- For ceiling mounted installation
- LED display
- 1 x LED glass filter panel
- softLight with dimmer function
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Filter cover glass, metal grease filter
- Interval operation
- 3 speeds plus intensive
- Automatic after running (Automatic after running (10 minutes))
- Automatic intensive revert (4 mins)
- EfficientDrive BLDC technology
- Rim ventilation

### Design

- Stainless steel
- Stainless steel
- Downdraft
- Ceiling mounted hood
- Electronic controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction CleanAir recirculating kit (accessory) needed
- Twin channel high performance fan motor
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 480 m<sup>3</sup>/h Intensive 720 m<sup>3</sup>/h
- Power rating: 185 W
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 59 dB (A) re 1pW
- Noise max. Normal Level: Noise, max. speed in normal us: 59 dB dB\*
- Light Intensity: 1127 lux
- Colour Temperature: 3800 K
- Electrical cable length 1.4 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 299-299 x 900 x 500 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 45 kWh/year\*


### Optional accessories

- Recirculating kit Z5170X1
- Rotatable motor: possible to position the air outlet on all four sides

\* In accordance with the EU-Regulation No 65/2014


N 90, Ceiling cooker hood, 90 cm, Stainless steel  
199CM67NOB

Dimensioned drawings

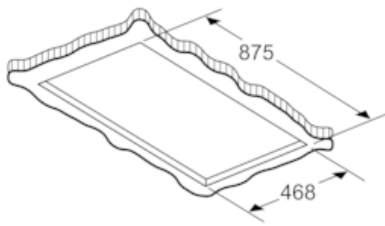


A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.

measurements in mm

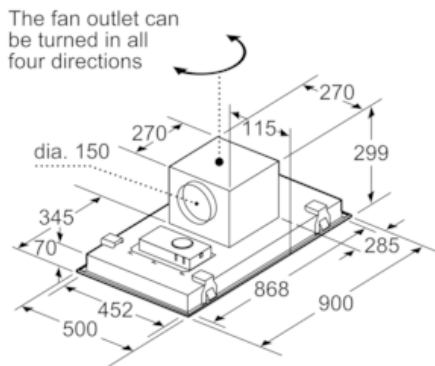

measurements in mm

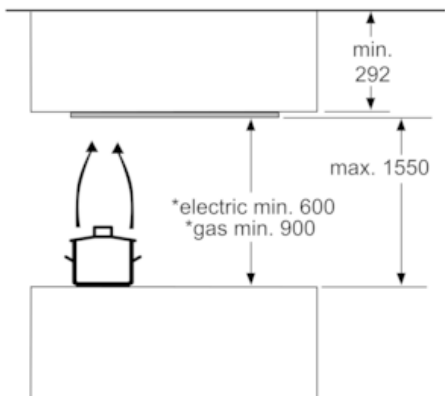

\* from upper edge of pan support  
measurements in mm