


N 90, Downdraft hood, 90 cm, Stainless steel
I99L59N0GB



COOKING PASSION SINCE 1877



C



The quiet Downdraft hood with a high extraction rate can be extended from the worktop whenever steam and culinary odours arise.

Features

Technical Data

Typology : Traditional
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 150
Required niche size for installation (HxWxD) : 652mm x 812.0mm x 113mm
Height of product, without chimney (mm) : 651
Net weight (kg) : 35.061
Type of control : Electronic
Number of speed settings : 3-stage + 2 intensive
Maximum output air extraction (m³/h) : 450
Boost position output recirculating (m³/h) : 680.0
Boost position air extraction (m³/h) : 710
Number of lights (Stck) : 1
Noise level (dB(A) re 1 pW) : 61
Diameter of air outlet (mm) : 150
Grease filter material : Washable aluminium
EAN code : 4242004169284
Connection rating (W) : 285
Current (A) : 10
Voltage (V) : 230
Frequency (Hz) : 50
Plug type : GB plug
Installation type : Built-in

Optional accessories

Z5159X1 Standard odor filter



4 242004 169284

N 90, Downdraft hood, 90 cm, Stainless steel
199L59N0GB

Features

Special features

- 7 segment LED display
- Interval operation
- Automatic 15 minutes after running
- Automatic revert setting

Features

- 2 metal grease filter cassettes
- Grease filter saturation indicator

Design




- 90 cm wide
- Touch control
- Rim ventilation

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Dimensions recirculating (HxWxD): 651- 1052 x 918 x 352 mm
- Dimensions exhaust air (HxWxD): 651- 1052 x 918 x 352 mm
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 450 m³/h Intensive 710 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 61 dB dB*
- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 109.1 kWh/year*
- Blower Efficiency Class: C*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*

N 90, Downdraft hood, 90 cm, Stainless steel
199L59N0GB

Dimensioned drawings

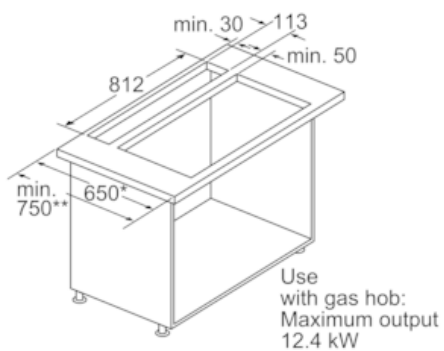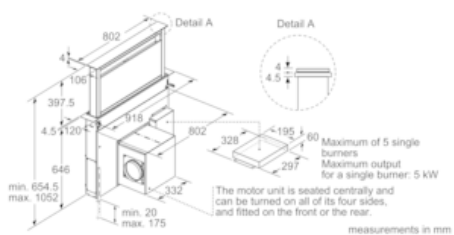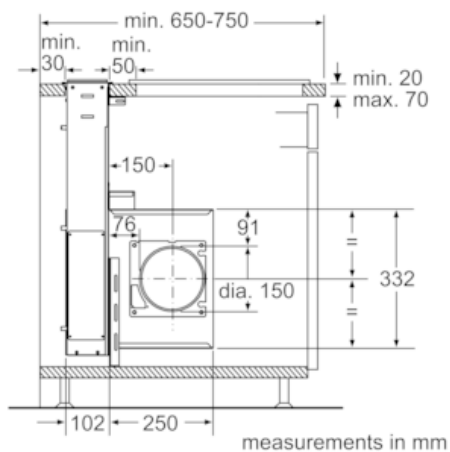

- * 650 mm depth only in combination with slim hobs.
 - ** min. 750 mm for hobs with 500 mm cut-out depth.
- measurements in mm