

N 50, Built-under fridge with freezer section, 82 x 60 cm, flat hinge
K4336XFF0G



COOKING PASSION SINCE 1877



This undercounter refrigerator with ****freezer compartment keeps produce at its freshest, and is also available with stainless steel door.

- ✓ Fresh Safe – Fridge drawer for flexible storage of your fresh fruit and vegetables.
- ✓ Adjustable Glass Shelves – Height adjustable shelves create the space you need for inspiring dishes in your fridge
- ✓ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge
- ✓ LED Light – Illuminate your fridge with long-life LEDs.
- ✓ Super Freeze – Lowers the temperature temporarily to prevent frozen goods from warming up as new items are added.

Features

Technical Data

Energy Efficiency Class : F
 Average annual energy consumption in kilowatt hour per year (kWh/a) : 180 kWh/annum
 Sum of volume of frozen compartments : 15 l
 Sum of volume of chill compartments : 108 l
 Airborne acoustical noise emissions : 38 dB(A) re 1 pW
 Airborne acoustical noise emission class : C
 Construction type : Built-in
 Door panel options : Possible but accessory
 Height : 820 mm
 Width of the appliance : 598 mm
 Depth of the product : 548 mm
 Required niche size for installation (HxWxD) : 820 x 600 x 550 mm
 Net weight : 34.8 kg
 Connection rating : 90 W
 Fuse protection : 13 A
 Door hinge : Right reversible
 Voltage : 220-240 V
 Frequency : 50 Hz
 Approval certificates : CE, G-Mark, VDE
 Length of electrical supply cord : 230 cm
 Storage Period in Event of Power Failure (h) : 8 h
 Number of compressors : 1
 Number of independent cooling systems : 1
 Interior ventilator : No
 Reversible Door Hinge : Yes
 Number of Adjustable Shelves in fridge compartment (Stck) : 1
 Shelves for Bottles : Yes
 EAN code : 4242004247029
 Brand : Neff
 Product name / Commercial code : K4336XFF0G
 Product category : Refrigerator
 Frost free system : No
 Installation type : Built-under



N 50, Built-under fridge with freezer section, 82 x
60 cm, flat hinge
K4336XFFOG



COOKING PASSION SINCE 1877

Features

- Fully integrated

Functions

- Ventilation through plinth
- Easy clean interior
- Interior design with metal applications

Design features

- Electronic control (LED chain)
- Automatic defrost fridge
- Single cooling circuit

Design features

- 2 safety glass shelves in fridge compartment of which 1 are height adjustable
- Full width pull out drawer
- Door shelves in fridge door: 1 large and 2 small.
- Bottle holder in x-deep door tray
- Bright interior LED fridge light

Freshness System

- 2 vegetable/salad containers

Food freshness system

- 1 hinged freezer compartment
- Ice box

Key features - Fridge section

- Height adjustable feet in the front
- Right hinged door, reversible
- Connection value 90 W
- 220 - 240 V

Dimension and installation

- Niche Dimensions: 82 cm H x 60 cm W x 55 cm D
- Dimensions: 82 cm H x 59.8 cm W x 54.8 cm D

Key features - Freezer section

- K4336XFFOG

Included accessories

- KSGG0MZ0, KU1213Z0

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Design features

Dimension and installation


Additional features

Performance and Consumption

- EU19_EEK_D: F
- Total Volume : 123 l
- Net Fridge Volume : 108 l
- Net Freezer Volume : 15 l
- Net 4* compartment volume : 15 l
- Freezing capacity 24h : 3.4 kg
- Annual Energy Consumption: 180 kWh/a
- Climate Class: SN-ST
- Noise Level : 38 dB , EU19_Noise emission class_D: C
- Temperature rise time : EU19_Temperature rise time_D: 8 H

N 50, Built-under fridge with freezer section, 82 x
60 cm, flat hinge
K4336XFF0G

Dimensioned drawings

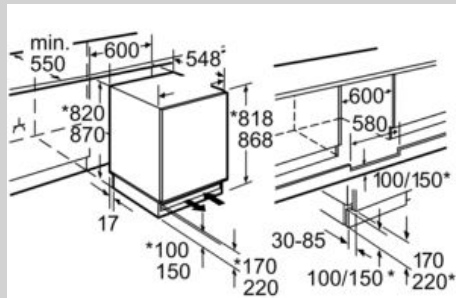

* Variable base/
substructure height

Space for electrical connection next to
the appliance on the left or right-hand side.
Ventilation space in the base.

Measurements in mm

measurements in mm
Recommended gap dimensions for flat hinges

	F	R	X
16-19	0-3	2.5	
	20	0-1	3
21	2-3	2.5	
	21	0-1	3
22	2-3	2.5	
	22	0	4
		1	3.5
	2-3	3	

The gap dimensions recommended
in the table must be adhered to in order
to ensure that appliance doors do not
collide with anything when they are opened,
and to avoid causing damage to kitchen units.

Maximal permissible weight of the unit fronts
Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

Δ Weight
A: Appliance door height including hinges in mm
B: Undamped hinge, unit front in kg
C: Damped hinge, unit front in kg

A	B	C
1500-1750	22	22
720-1400	19	19
A1	15	19
A2	15	19