N 90, Built-in fridge, 177.5 x 56 cm
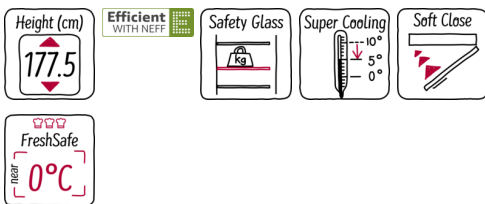## K8315X0GB

NEFF

A++

This built-in refrigerator keeps foods fresh up to 3x longer, and automatically defrosts the freezer compartment.

√ FreshSafe 3: Optimal freshness due to two climate zones with different air moisture at nearly 0°C.

√ A++: Appliance with very low energy consumption.

√ EasyLift: More flexibility in the interior with easy-adjusting glass shelf.

√ Softclose: When it reaches an angle of 20° the door softly closes itself.

√ Complete ventilation through plinth: More room on the inside thanks to placement of the air intake and outlet openings in the base.

Features

Technical Data

Construction type : Built-in
Door panel options : Not possible
Height (mm) : 1772
Width of the product (mm) : 556
Depth of the product : 545
Required niche size for installation (HxWxD) : 1775.0 x 560 x 550
Net weight (kg) : 81.387
Connection rating (W) : 120
Current (A) : 10
Door hinge : Right reversible
Voltage (V) : 220-240
Frequency (Hz) : 50
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 230
Number of compressors : 1
Number of independent cooling systems : 2
Interior ventilator : No
Reversible Door Hinge : Yes
Number of Adjustable Shelves in fridge compartment (Stck) : 3
Shelves for Bottles : Yes
EAN code : 4242004189817
Brand : Neff
Product name / Commercial code : K8315X0GB
Product category : Refrigerator
Energy efficiency class (2010/30/EC) : A++
Energy consumption annual (kWh/annum) - NEW (2010/30/EC) : 133.00
Refrigerator Net capacity (l) - NEW (2010/30/EC) : 302
Freezer Net capacity (l) - NEW (2010/30/EC) : 0
Frost free system : No
Freezing capacity (kg/24h) - NEW (2010/30/EC) : 0
Noise level (dB(A) re 1 pW) : 39
Climate class : SN-T
Installation type : Full-integrated

N 90, Built-in fridge, 177.5 x 56 cm
K8315X0GB

Performance and Consumption

- Energy Efficiency Class: A++ at a range of energy efficiency classes from A+++ to D
- Energy Efficiency Class: A++ kWh/yr: 0.363 kwh

Performance and Consumption

- Total net capacity: 302 litres
- Net fridge capacity: 302 litres
- Net fridge capacity: 225 litres
- Capacity in 0° C section: 77 l
- Noise level dB(A) re 1 pW: 39

Design features

- Fixed hinge
  SoftClose door - dampens door movement, for smooth and effortless closure
- Electronic control (LED chain)
- Right hinged door, reversible

Food freshness system

- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity

Key features - Fridge section

- Electronic control (LED chain)
- Bright interior LED fridge light
- - Constant temperature control by intelligent sensor technology
- SuperCool function with automatic deactivation
- Acoustic door open warning indicator
- 7 safety glass shelves (3 height adjustable), of which Standard shelf, 1 EasyLift glass shelf, 1 fully extendable glass shelf
- 4 door trays, including 1x dairy compartment
- Interior design with metal applications
- 1 FreshSafe 3 0°C drawer for optimal freshness; food stays fresh for up to three times longer due to two climate zones.
- 2 FreshSafe 3 0°C drawers for optimal freshness; food stays fresh for up to three times longer due to two climate zones.
- 1 dairy compartment in door with Slide & Hide Function
- Right hinged door, reversible
- 1 x butter dish, 3 x egg tray

Functions

- Acoustic door open warning indicator

Dimension and installation

- Ventilation in plinth, the plinth size can be varied
- Easy Installation
- Connection value 120 W
- Dimensions: 177.2 cm H x 55.6 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D
- Climate class SN-T (suitable for ambient temperatures between 10 to 43°C)
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

N 90, Built-in fridge, 177.5 x 56 cm
K8315X0GB

Dimensioned drawings

556 — 545
3
1,749
1,772
1,743
110

Measurements in mm

560 recommended
min. 550

Electrical connection above or to the side of the appliance

1,772 +max.8

Double-floor installation and intermediate floor installation also possible

min. 100

350

min. 560

Measurements in mm