

*N 70, BUILT-IN FRIDGE-FREEZER WITH FREEZER
AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT
HINGE
K17863DF0G*



Optional accessories

KS9E0FZ0	Package Neff FlexCooling
KSGG0MZ0	Butter box
Z10020	Bottle Rack

This built-in combination refrigerator/freezer with FreshSafe food freshness system keeps foods fresher for longer

- ✓ No Frost – No more defrosting your freezer.
- ✓ Fresh Safe 2 – Ideal storage for fruit and veg.
- ✓ Bottle Flex Shelf – A bottle holder and shelf in one.
- ✓ Soft Close – Enjoy the silence. The door softly closes itself when at an angle of 20 degrees.
- ✓ Easy Access Shelf – Slides out for easier access to items in your fridge.

Features

Technical Data

Energy Efficiency Class:	F
Average annual energy consumption in kilowatt hour per year (kWh/a):	277 kWh/a
Sum of volume of frozen compartments:	67 l
Sum of volume of chill compartments:	187 l
Airborne acoustical noise emissions :	39 dB(A) re 1 pW
Airborne acoustical noise emission class:	C
Built-in / Free-standing:	Built-in
Door panel options:	Not possible
Height:	1772 mm
Width of the appliance:	558 mm
Depth:	545 mm
Min. required niche size for installation (HxWxD):	1775.0 x 560 x 550 mm
Net weight:	67.0 kg
Connection Rating:	90 W
Fuse protection:	13 A
Door hinge:	Right reversible
Voltage:	220-240 V
Frequency:	50 Hz
Length electrical supply cord:	230.0 cm
Number of compressors:	1
Number of independent cooling systems:	2
Interior ventilator:	Yes
Reversible Door Hinge:	Yes
Number of Adjustable Shelves in fridge compartment:	4
Shelves for Bottles:	Yes
Frost free system:	Freezer
Installation typology:	Full-integrated



N 70, BUILT-IN FRIDGE-FREEZER WITH FREEZER
AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT
HINGE
KI7863DF0G

Features

Functions

- Bright interior LED fridge light in fridge section

Design features

- Touchcontrol- Electronic - Electronic controls for fridge and freezer
- FreshSense - constant temperature by intelligent sensor technology
- Constant temperature control by intelligent sensor technology
- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity
- Super Cooling: automatic deactivation
- SuperFreeze function with automatic deactivation
- Holiday mode
- Acoustic door open warning indicator
- Freezer malfunction warning signal: optical and acoustical

Design features

- 5 safety glass shelves (4 height adjustable)
- 5 door trays, including 1x dairy compartment

Freshness System

- 1 FreshSafe 2 drawer; High humidity retains nutrients up to twice as long

Food freshness system

- NO_FROST_NEU_BL, never have to defrost ever again
- Removeable safety glass shelves in freezer
- 3 transparent freezer drawers, 1 bigbox

Dimension and installation

- Dimensions: 177.2 cm H x 55.8 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Fridge section

- BottleFlex Shelf
- Right hinged door, reversible
- Connection value 90 W
- 220 - 240 V
- Transportation handles
- bottle holder in door tray

Key features - Freezer section

- KI7863DF0G
- 1 FreshSafe 2 drawer; High humidity retains nutrients up to twice as long
- Vario shelf - useful storage when required
- Easy access shelf - easy access and everything in sight
- touch control - enduring elegance - perfectly under control

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Design features

Dimension and installation

Additional features




Performance and Consumption

- EU19_EEK_D: F
- Total Volume : 254 l

- Net Fridge Volume : 187 l
- Net Freezer Volume : 67 l
- Freezing capacity 24h : 6 kg
- Annual Energy Consumption: 277 kWh/a
- Climate Class: SN-ST
- EU19_Fast freezer facility_D
- Noise Level : 39 dB , EU19_Noise emission class_D: C
- Temperature rise time : EU19_Temperature rise time_D: 9 H


N 70, BUILT-IN FRIDGE-FREEZER WITH FREEZER
AT BOTTOM, 177.2 X 55.8 CM, SOFT CLOSE FLAT
HINGE
K17863DF0G

Dimensioned drawings

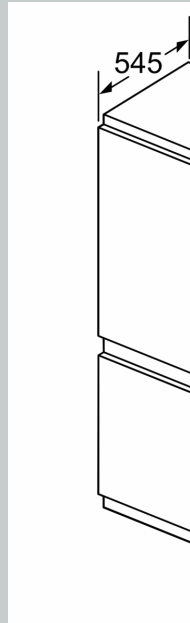


Air outlet
min. 200 cm²

Ventilation
space
in the base
min. 200 cm²

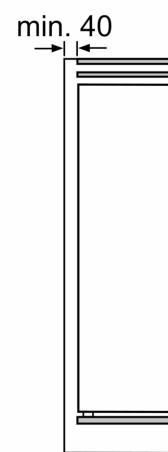

The specified
are valid for a

measurement
Recommended



The gap dimension
in the table must
to ensure that
collide with air
and to avoid c