

N 90, DOMINO GAS HOB, 30 CM, CERAMIC, BLACK N23TA19N0



Included accessories

1 x WOK attachment ring

Optional accessories

Z2406X0 Small pot support
Z2480X0 Simmer plate
Z9914X0 Connecting strip

The gas hob with heat-resistant ceramic glass surface and adjustable FlameSelect control.

- ✓ Ceramic Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ 7-Segment Display with Residual Heat Indicator - a digital display showing the remaining heat.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Dual Wok Burner 6.0 kW – Use one gas flame for simmering, two for sizzling stir-fries.

Features

Technical Data

Product name/family: Vario/Domino gas hob w control
Product name/family: Vario/Domino gas hob w control
Construction type: Built-in
Construction type: Built-in
Energy input: Gas
Energy input: Gas
Number of cooking zones: 1
Number of cooking zones: 1
Min. required niche size for installation (HxWxD): 45 x 270 x 490-500 mm
Min. required niche size for installation (HxWxD): 45 x 270 x 490-500 mm
Width of the appliance: 306 mm
Width of the appliance: 306 mm
Dimensions: 59 x 306 x 546 mm
Dimensions: 59 x 306 x 546 mm
Dimensions of the packed product (HxWxD): . 185 x 397 x 646 mm
Dimensions of the packed product (HxWxD): . 185 x 397 x 646 mm
Net weight: 7.9 kg
Net weight: 7.9 kg
Gross weight: 9.0 kg
Gross weight: 9.0 kg
Residual heat indicator: Separate
Residual heat indicator: Separate
Location of control panel: Front
Location of control panel: Front
Basic surface material: Ceramic
Basic surface material: Ceramic
Color of surface: Black, Stainless steel
Color of surface: Black, Stainless steel
Color of frame: Black, Stainless steel
Color of frame: Black, Stainless steel
Length of electrical supply cord: 100.0 cm
Length of electrical supply cord: 100.0 cm
EAN code: 4242004203261
EAN code: 4242004203261
Gas connection rating: 6000 W
Gas connection rating: 6000 W
Fuse protection: 3 A
Fuse protection: 3 A
Voltage: 220-240 V
Voltage: 220-240 V
Frequency: 60; 50 Hz
Frequency: 60; 50 Hz
Included accessories: 1 x WOK attachment ring



N 90, DOMINO GAS HOB, 30 CM, CERAMIC, BLACK N23TA19N0

Features

Design

- ceramic glass surface, black
- Bevelled design, stainless steel
- black cast iron pan supports with protective rubber feet
- Low profile burner: elegant burner design

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- LED display for each zone: see the selected power level and the residual heat.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 1 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Center front: Wok burner up to 6 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 2 stage residual heat indicator: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 306 x 546
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 6 KW

Accessories

- 1 x WOK attachment ring included

N 90, DOMINO GAS HOB, 30 CM, CERAMIC, BLACK
N23TA19N0

Dimensioned drawings


measurements in mm
Domino combination options with
corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X	
2x30	306	306	-	-	612	576	
1x30, 1x40	306	396	-	-	702	666	
1x30, 1x60	306	606	-	-	912	876	
1x30, 1x70*	306	708	-	-	1014	980	
1x30, 1x80	306	826	-	-	1132	1086	
1x30, 1x90	306	918	-	-	1224	1186	
2x40	396	396	-	-	792	756	
1x40, 1x60	396	606	-	-	1002	966	
1x40, 1x70*	396	708	-	-	1104	1070	
1x40, 1x80	396	826	-	-	1222	1176	
1x40, 1x90	396	918	-	-	1314	1276	
3x30	306	306	306	-	918	882	
2x30, 1x40	306	306	396	-	1008	972	
2x30, 1x60	306	306	606	-	1218	1182	
2x30, 1x70*	306	306	708	-	1320	1286	
2x30, 1x80	306	306	826	-	1438	1392	
2x30, 1x90	306	306	918	-	1530	1492	
1x30, 2x40	306	396	396	-	1098	1062	
1x30, 1x40, 1x60	306	396	606	-	1308	1272	
1x30, 1x40, 1x70*	306	396	708	-	1410	1376	
1x30, 1x40, 1x80	306	396	826	-	1528	1482	
1x30, 1x40, 1x90	306	396	918	-	1620	1582	
2x40, 1x60	396	396	606	-	1398	1362	
4x30	306	306	306	306	1224	1188	
3x30, 1x40	306	306	306	396	1314	1278	
1x30, 1x75	306	750	-	-	1056	1020	
1x40, 1x75	396	750	-	-	1146	1110	
2x30, 1x75	306	306	750	-	1362	1326	
1x30, 1x40, 1x75	306	396	750	-	1452	1416	


* Not possible with 70 cm induction hob

measurements in mm

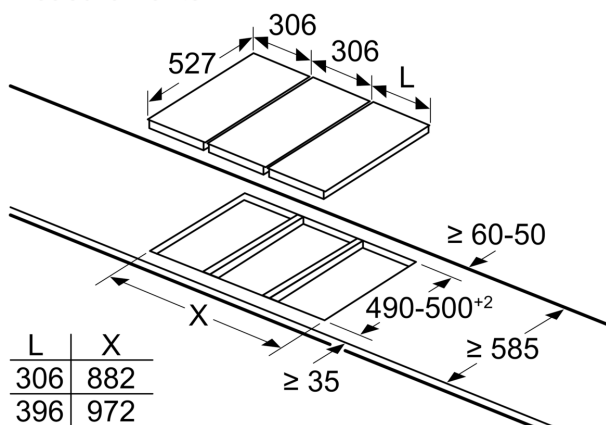


When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

measurements in mm

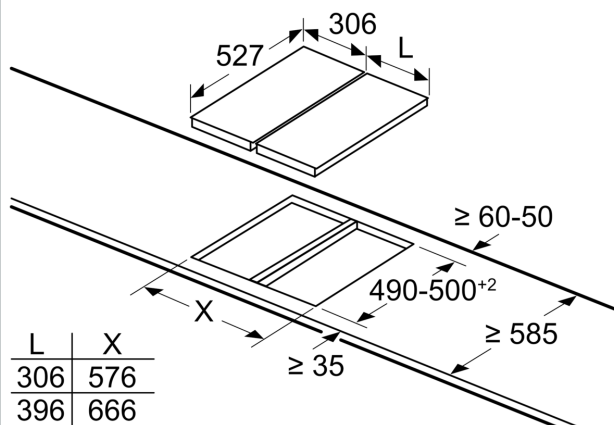

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

measurements in mm
Picture for the table Domino combination possibilities
with corresponding devices and cutout dimensions




If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.).


Cutout dimension (X) depending on the combination see table:

Dimensioned drawings

measurements in mm
Assembly kit (HEZ394301) for Domino

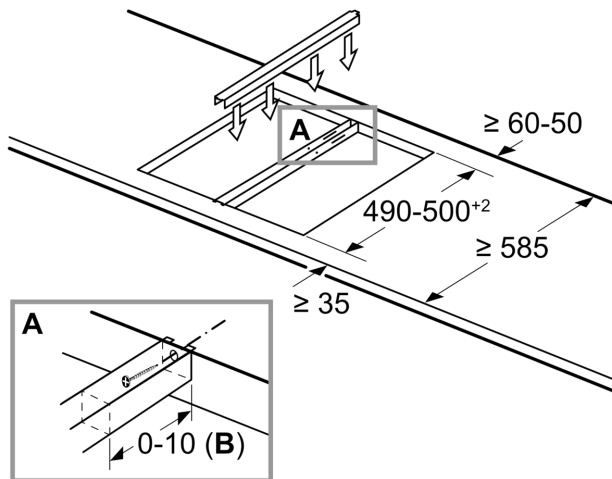

B: Dependent on the cut-out depth

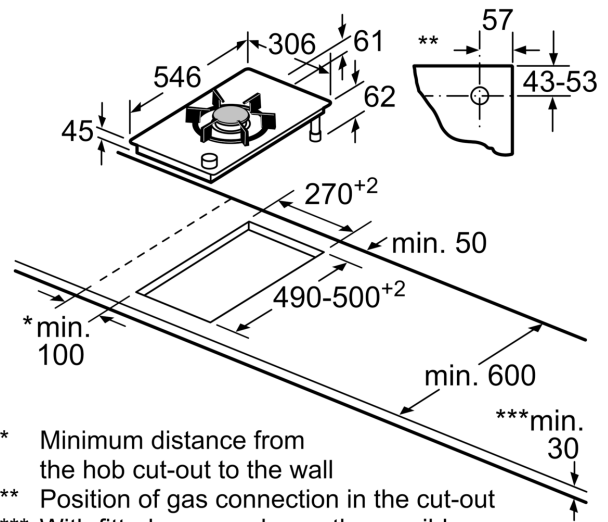

- * Minimum distance from the hob cut-out to the wall
- ** Position of gas connection in the cut-out
- *** With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm