


N 30, GAS HOB, 60 CM, STAINLESS STEEL
T26BKP6N0

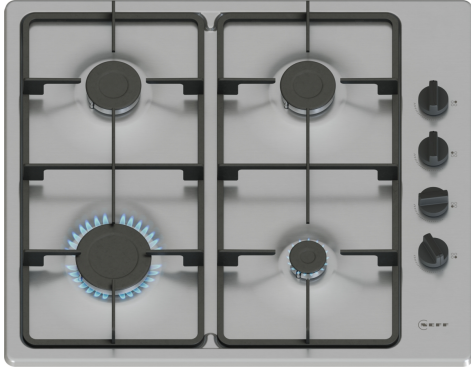

Optional accessories

Z1365WX0	Wireless food thermometer
Z9404SE0	4 pieces Set
Z9406SE0	6 pieces Set

The gas hob with lateral dials with more space in the gaps - for easy cleaning.

- ✓ Sword Dials: Easy control and easy cleaning.
- ✓ Cast Iron Finish Pan Supports: Stability for your pots and pans.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.
- ✓ Biomethane Ready: Power your hob with renewable biomethane gas.

Features

Technical Data

Product name/family:	gas hob w integrated controls
Built-in / Free-standing:	Built-in
Energy input:	Gas
Number of cooking zones:	4
Type of control setting devices:	sword knobs
Required niche size for installation (HxWxD):	45 x 560-560 x 480-490 mm
Width of the appliance:	580 mm
Dimensions:	45x580x510 mm
Dimensions of the packed product (HxWxD):	141x651x578 mm
Net weight:	6.8 kg
Gross weight:	7.6 kg
Residual heat indicator:	Without
Location of control panel:	Lateral
Basic surface material:	Stainless steel
Color of surface:	Stainless steel
Length electrical supply cord:	100 cm
EAN code:	4242004284512
Gas connection rating:	7500 W
Fuse protection:	3 A
Voltage:	220-240 V
Frequency:	50; 60 Hz



N 30, GAS HOB, 60 CM, STAINLESS STEEL T26BKP6N0

Features

Design

- Stainless steel surface
- Cast iron finish pan supports with rubber feet

Usage convenience

- Design co-ordinated control dials, right: access knobs on the side with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: High-speed burner up to 3 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Standard burner up to 1.75 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Wider distance between dials for better cleaning.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 51.8 x 580 x 510
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 7.5 KW

N 30, GAS HOB, 60 CM, STAINLESS STEEL
T26BKP6N0

Dimensioned drawings

