


N 30, GAS HOB, 60 CM, STAINLESS STEEL  
T26BR46N0

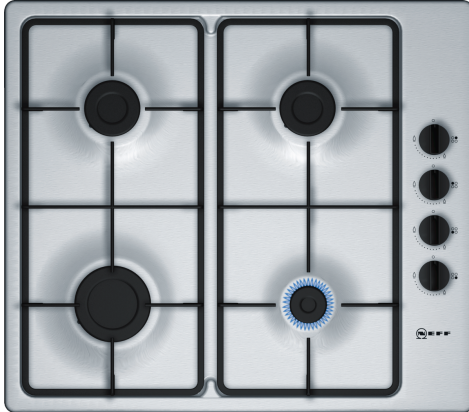

Optional accessories

Z2402X0	Small pot support
Z32SE10X0	Small pot support

Gas hob with side-mounted controls.

- ✓ Pan Supports - continuous cast-iron finish pan supports for maximum stability and cooking convenience.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- ✓ Stainless steel surface - elegant and sophisticated design.

Features

Technical Data

Product name/family:	.....gas hob w integrated controls
Built-in / Free-standing:	..... Built-in
Energy input:	..... Gas
Number of cooking zones:	..... 4
Type of control setting devices:	..... sword knobs
Min. required niche size for installation (HxWxD):	.. 45 x 560-562 x 480-492 mm
Width of the appliance:	..... 580 mm
Dimensions:	..... 56 x 580 x 510 mm
Dimensions of the packed product (HxWxD):	.. 141 x 651 x 578 mm
Net weight:	..... 6.9 kg
Gross weight:	..... 7.8 kg
Residual heat indicator:	.....without
Location of control panel:	.....Lateral
Basic surface material:	..... Stainless steel
Color of surface:	.....Stainless steel
Length electrical supply cord:	..... 100.0 cm
EAN code:	.....4242004187271
Gas connection rating:	.....7400 W
Fuse protection:	.....3 A
Voltage:	..... 220-240 V
Frequency:	..... 60; 50 Hz



N 30, GAS HOB, 60 CM, STAINLESS STEEL  
T26BR46N0

## Features

### Design

- Stainless steel surface
- Cast iron finish pan supports with rubber feet

### Usage convenience

- Design co-ordinated control dials: access knobs on the side with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 4 burner hob
- Left front: High-speed burner up to 3 KW (depending on gas type)
- Left rear: Standard burner up to 1.7 KW (depending on gas type)
- Right rear: Standard burner up to 1.7 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 56 x 580 x 510
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.4 KW

N 30, GAS HOB, 60 CM, STAINLESS STEEL  
T26BR46N0

Dimensioned drawings

