


N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK
T26NKP4S0

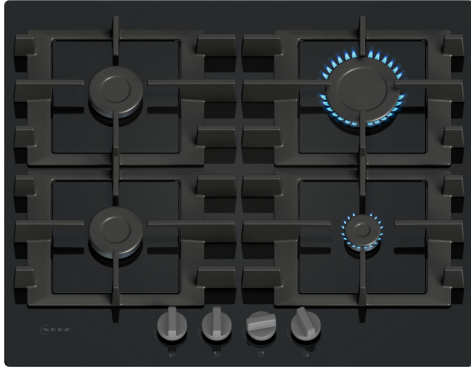

Optional accessories

Z1365WX0	Wireless food thermometer
Z9404SE0	4 pieces Set
Z9406SE0	6 pieces Set

The gas hob with semi-continuous pan supports that are suitable for dishwashers - for easy cleaning.

- ✓ Sword Dials: For easy, enjoyable control while cooking.
- ✓ Cast Iron Pan Supports: Maximum stability, easy handling, and dishwasher cleaning.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.
- ✓ Biomethane Ready: Power your hob with renewable biomethane gas.

Features

Technical Data

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Number of cooking zones: 4
 Type of control setting devices: sword knobs
 Required niche size for installation (HxWxD): 45 x 560-560 x 480-490 mm
 Width of the appliance: 590 mm
 Dimensions: 45x590x520 mm
 Dimensions of the packed product (HxWxD): 141x651x578 mm
 Net weight: 12.9 kg
 Gross weight: 14.1 kg
 Residual heat indicator: Without
 Location of control panel: Front
 Basic surface material: Tempered glass
 Color of surface: Black
 Color of frame: Black
 Length electrical supply cord: 100 cm
 EAN code: 4242004284581
 Gas connection rating: 7500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK T26NKP4S0

Features

Design

- tempered glass surface, black
- Cast iron pan supports with rubber feet

Usage convenience

- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 57.4 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 7.5 KW
- Two built-in options:
 - - Flush installation
 - - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- If installed flush, minimum worktop thickness is 30mm.

N 50, GAS HOB, 60 CM, TEMPERED GLASS, BLACK
T26NKP4S0

Dimensioned drawings

