


N 50, GAS HOB, 75 CM, STAINLESS STEEL
T27BB59N0

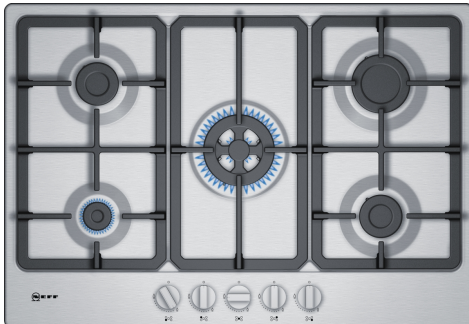

The gas hob with front control - for a comfortable regulation of the 5 gas burners.

- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Wok Burner - powerful cooking at up to 3.3 kW.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- ✓ Stainless steel surface - elegant and sophisticated design.
- ✓ Biomethane ready - Power your hob with renewable biomethane gas.

Z2480X0 Simmer plate
Z32SE10X0 Small pot support
Z32SW10X0 Wok ring

Product name/family:gas hob w integrated controls
Built-in / Free-standing: Built-in
Energy input: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Required niche size for installation (HxWxD):45 x 560-562 x 480-492 mm
Width of the appliance: 750 mm
Dimensions: 53x750x520 mm
Dimensions of the packed product (HxWxD): . 145 x 793 x 597 mm
Net weight: 12.9 kg
Gross weight: 14.5 kg
Residual heat indicator:without
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface:Stainless steel
Length electrical supply cord: 150.0 cm
EAN code:4242004234289
Gas connection rating: 10800 W
Fuse protection:3 A
Voltage:220-240 V
Frequency: 50; 60 Hz



N 50, GAS HOB, 75 CM, STAINLESS STEEL T27BB59N0

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience

- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 3.3 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 10.8 KW

N 50, GAS HOB, 75 CM, STAINLESS STEEL
T27BB59N0

