


*N 70, GAS HOB, 90 CM, STAINLESS STEEL
T29DS69N0*

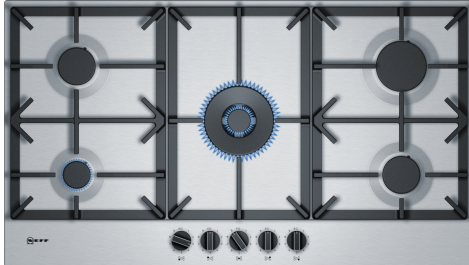

Z2480X0 Simmer plate
Z32SE10X0 Small pot support

The gas hob with a stainless-steel surface design and adjustable FlameSelect.

Product name/family:gas hob w
integrated controls
Built-in / Free-standing: Built-in
Energy input: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Required niche size for installation (HxWxD): 45 x 850-852 x
490-502 mm
Width of the appliance: 915 mm
Dimensions: 53x915x520 mm
Dimensions of the packed product (HxWxD): 165 x 1116 x 659
mm
Net weight: 15.4 kg
Gross weight: 17.7 kg
Residual heat indicator: without
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 150.0 cm
EAN code: 4242004203612
Gas connection rating: 12500 W
Fuse protection: 3 A
Voltage: 220-240 V
Frequency: 60; 50 Hz



N 70, GAS HOB, 90 CM, STAINLESS STEEL T29DS69N0

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 5 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Liquid gas G30,31 28-30/37mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 12.5 KW

Accessories

- 1 x WOK attachment ring included

N 70, GAS HOB, 90 CM, STAINLESS STEEL
T29DS69N0

