


N 90, GAS HOB, 90 CM, CERAMIC, BLACK
T29TS79N0

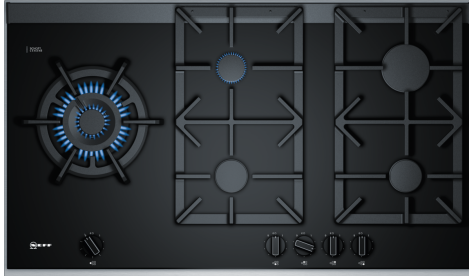

Optional accessories

Z2402X0	Small pot support
Z2480X0	Simmer plate

The gas hob with heat-resistant ceramic glass surface and adjustable FlameSelect control.

- ✓ Ceramic Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Biomethane ready – Power your hob with renewable biomethane gas.
- ✓ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.

Features

Technical Data

Product name/family:gas hob w
integrated controls
Construction type: Built-in
Energy input: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Min. required niche size for installation (HxWxD): .. 45 x 850-852 x
490-502 mm
Width of the appliance: 918 mm
Dimensions: 59 x 918 x 546 mm
Dimensions of the packed product (HxWxD): 165 x 1116 x 659
mm
Net weight: 19.6 kg
Gross weight: 22.0 kg
Residual heat indicator:without
Location of control panel: Front
Basic surface material: Ceramic
Color of surface:Black, Stainless steel
Color of frame:Black, Stainless steel
Length of electrical supply cord: 150.0 cm
EAN code:4242004268758
Gas connection rating:13800 W
Fuse protection:3 A
Voltage:220-240 V
Frequency:50; 60 Hz



*N 90, GAS HOB, 90 CM, CERAMIC, BLACK
T29TS79N0*

Features

Design

- ceramic glass surface, black
- Bevelled design, stainless steel
- black cast iron pan supports with protective rubber feet
- Low profile burner: elegant burner design

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 6.1 KW (depending on gas type)
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: Economy burner up to 1.1 KW (depending on gas type)
- Right rear: High speed burner up to 2.8 KW (depending on gas type)
- Right front: Standard burner up to 1.9 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 918 x 546
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 13.8 KW

Accessories

- 1 x WOK attachment ring included