


*N 90, GAS HOB, 90 CM, CERAMIC, BLACK  
T29TS79N0*

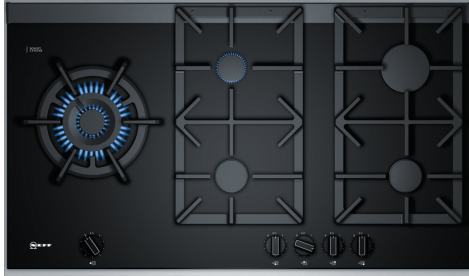

The gas hob with heat-resistant ceramic glass surface and adjustable FlameSelect control.

Z2402X0 Small pot support  
Z2480X0 Simmer plate

Product name/family: .....gas hob w  
integrated controls  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Gas  
Number of cooking zones: ..... 5  
Type of control setting devices: ..... sword knobs  
Required niche size for installation (HxWxD): ..... 45 x 850-852 x  
490-502 mm  
Width of the appliance: ..... 918 mm  
Dimensions: ..... 59x918x546 mm  
Dimensions of the packed product (HxWxD): ..... 165 x 1116 x 659  
mm  
Net weight: ..... 19.6 kg  
Gross weight: ..... 22.0 kg  
Residual heat indicator: ..... without  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: .....Black, Stainless steel  
Color of frame: .....Black, Stainless steel  
Length electrical supply cord: ..... 150.0 cm  
EAN code: .....4242004268758  
Gas connection rating: ..... 13800 W  
Fuse protection: .....3 A  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz



N 90, GAS HOB, 90 CM, CERAMIC, BLACK  
T29TS79N0

#### Design

- ceramic glass surface, black
- Bevelled design, stainless steel
- black cast iron pan supports with protective rubber feet
- Low profile burner: elegant burner design

#### Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

#### Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 6.1 KW (depending on gas type)
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: Economy burner up to 1.1 KW (depending on gas type)
- Right rear: High speed burner up to 2.8 KW (depending on gas type)
- Right front: Standard burner up to 1.9 KW (depending on gas type)

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 918 x 546
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 13.8 KW

#### Accessories

- 1 x WOK attachment ring included

N 90, GAS HOB, 90 CM, CERAMIC, BLACK  
T29TS79N0

