


INDUCTION HOB, 60 CM, BLACK,
T53T55N2

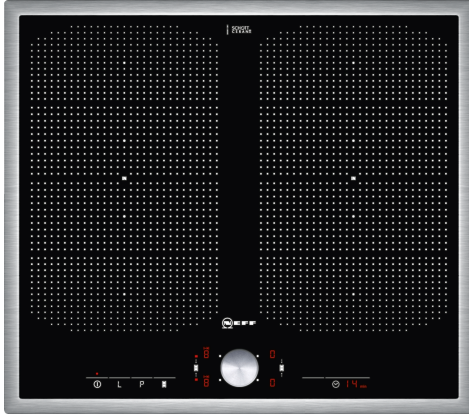

Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z9442X0	Set of 3 pots and 1 pan

- √ Flex Induction: flexible cooking zones and automatic cookware detection.
- √ Power Boost – An extra surge of heat when you need fast results.
- √ Induction: heat is generated directly in the cookware for precise cooking that stops instantly when off.

Features

Technical Data

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Number of cooking zones: 4
 Min. required niche size for installation (HxWxD): .. 55 x 560-560 x 490-500 mm
 Width of the appliance: 583 mm
 Dimensions: 55 x 583 x 513 mm
 Dimensions of the packed product (HxWxD): . 118 x 746 x 604 mm
 Net weight: 12.0 kg
 Gross weight: 13.1 kg
 Residual heat indicator: Separate
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface:Black, Stainless steel
 Color of frame:Stainless steel
 Length electrical supply cord: 110.0 cm
 EAN code:4242004168089
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



INDUCTION HOB, 60 CM, BLACK,
T53T55N2

Features

Special features

- Electronic control
- Point & Twist control dial
- 2 x FlexInduction zones with different usage possibilities: each has 2 single induction zones of 480 cm² or 1 flexible induction zone of 889 cm²
- Power boost for all induction zones
- LED timer for each zone with switch off function and acoustic signal
- Automatic pan recognition

Features


- 4 zone induction hob
- 2 stage residual heat indicators
- Control panel lock
- Safety cut out facility
- Control panel suspension

Design

- 583 mm wide
- Standard design full trim
- Cooking zone selection and temperature control via removable "Point & Twist" magnetical central control

INDUCTION HOB, 60 CM, BLACK,
T53T55N2

Dimensioned drawings

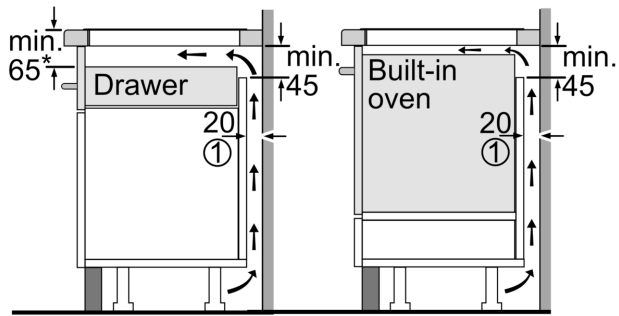


①
Ventilation gap must
be present

* Min. 70 for all induction
hobs integrated flush
with surrounding surfaces

Measurements
in mm

measurements in mm



- A:** Minimum distance from the hob cut-out to the wall.
- B:** Recessed depth
- C:** The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50