



N 90, Induction hob, 90 cm, Black  
T59TS51N0



COOKING PASSION SINCE 1877

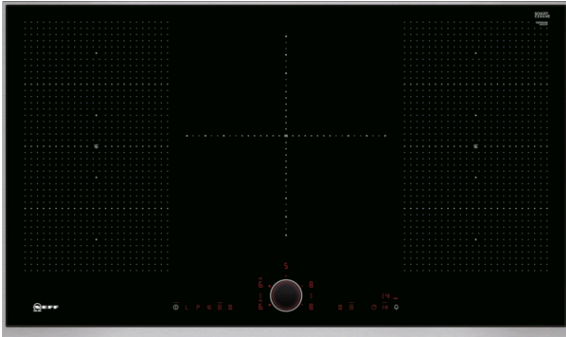

#### FlexInduction Hob with TwistPad control.

- ✓ TwistPadFire® – our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Flex Induction – Your hob detects and heats your individual cookware.
- ✓ Power Move – Just slide your cookware to adjust the temperature.
- ✓ Frying Sensor – Monitors the temperature to prevent scorching.
- ✓ Power Boost – An extra surge of heat when you need fast results.

#### Features

##### Technical Data

Product name/family : Cooking zone ceramic

Construction type : Built-in

Energy input : Electric

Total number of positions that can be used at the same time : 5

Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500 mm

Width of the appliance : 918 mm

Dimensions : 51 x 918 x 546 mm

Dimensions of the packed product (HxWxD) : 126 x 1073 x 603 mm

Net weight : 22.625 kg

Gross weight : 24.5 kg

Residual heat indicator : Separate

Location of control panel : Hob front

Basic surface material : Ceramic

Color of surface : Black, Stainless steel

Color of frame : Stainless steel

Approval certificates : AENOR, CE

Length of electrical supply cord : 110 cm

EAN code : 4242004192114

Electrical connection rating : 11100 W

Voltage : 220-240 V

Frequency : 60; 50 Hz

#### Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z941CF0	Pan Ø 22 / 26 cm
Z941LP0	Pot Ø 14 (bottom) / 16 cm (top)
Z941LP1	Pot Ø 18 (bottom) / 20 cm (top)
Z943SE0	Set of 2 pots and 1 pan
Z9914X0	Connecting strip



4 242004 192114

## N 90, Induction hob, 90 cm, Black

T59TS51N0



COOKING PASSION SINCE 1877

### Features

#### Control

- TwistPad® Fire
- Frying Sensor: 5 frying levels

#### Flexibility

- Ring zone triple, 2 Flex zones
- 5 zone induction hob

#### Special features

- Power Boost function for all zones
- PanBoost
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones  
LED timer for each zone with switch off function and acoustic signal  
Count up timer
- ReStart function
- Automatic pan recognition  
Safety cut out facility  
Control panel lock  
Control panel suspension
- Keep warm function
- Energy consumption display

#### Technical information

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 kW (max. Power levels 3.7 kW) Induction or 2 x Ø 230 mm, 2.2 kW (max. Powerlevels 3.7 kW) Induction; 1 x Ø 320 mm, 3.3 kW (max. Power levels 3.7 kW) Induction; 1 x Ø 400 mmx230 mm, 3.3 kW (max. Powerstufe 3.7 kW) Induktion oder 2 x Ø 230 mm, 2.2 kW (max. Powerstufe 3.7 kW) Induction
- Measurement: (H/B/T) 51 x 918 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 880 mm x 490 mm
- 90 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 16 mm
- Output 11100 W
- Cable included in packaging

Dimensioned drawings

