

N 50, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, STAINLESS STEEL B3AVH4HN1













Included accessories

1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and roasting grid (standard), Z11TI15X0 Cliprails, Z12CB10A0 Baking tray, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z1608BX0 Full ext rails, level independent, Z1655CA0 Air Fry & Grill tray, Z1913X0 Baking Stone, Z19DD10X0 Steam set for ovens, Z99RX70X0 Connecting cable 3m

- $\sqrt{\text{Slide\&Hide}^{\$}}$ The fully retracting oven door.
- $\sqrt{\mbox{CircoTherm}^{\otimes}}$ Smart hot-air solution that lets you bake on up to three levels at once.
- $\sqrt{\,}$ Added Steam a simple push for the right amount of steam to make your food juicy on the inside and crispy on the outside
- $\sqrt{\mbox{ Eco Clean}}$ with Easy Clean the duo that makes oven cleaning easier
- $\sqrt{\,}$ LCD-Display simple, straightforward with large characters for clear reading

Features

Technical Data Built-in / Free-standing:
Dimensions:
Usable volume (of cavity) - cavity 1:
Length electrical supply cord:
Energy consumption per cycle forced air convection
(2010/30/EC): 0.81 kWh/cycle Energy efficiency index (2010/30/EC): .95.3 % Connection Rating: .3600 W Fuse protection: .16 A Voltage: .220-240 V Frequency: .50; 60 Hz Plug type:





N 50, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, STAINLESS STEEL B3AVH4HN1

Features

Features

- Oven with 9 heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bread baking, Bottom heat, CircoTherm® gentle, Reheat with steam
- Heating modes in combination with steam function: CircoTherm[®], Circo-roasting, Top/bottom heat
- Temperature range 30 °C 275 °C
- Cavity volume: 71 litre

Level independent telescopic rails

- 4 shelf positions
- 1 Clip rail, Stop function

Desiar

- Bevelled oval controls, Retractable controls dials, oval
- Cavity inner surface: enamel anthracite

Cleaning

- EcoCleanDirect : back panel
- EasyClean
- Full glass inner door

Programmes/functions

- LCD-Display Control (white)
- Electronic clock timer
- Temperature proposal
- Actual temperature display Heating up indicator automatic programmes: Automatic start
- Number of automatic programmes: 15 PC
- Additional functions:
- De-scaling programme
- steam level high steam level low
- Slide&Hide® with fixed handle
- Bar handle
- Automatic programmes
- Rapid heat
- Interior halogen light, On/off button
- Water tank capacity with a volume of 220ml
- Location of water tank: Outside cavity
- Cooling fan
- Stainless-steel fan
- Info button

Accessories

• 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Features

- Heat reflective glass
- Control panel lock
- Automatic safety switch off Residual heat indicator

Technical information

• 120 cm Cable length

- Nominal voltage: 220 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A
- Energy consumption per cycle in conventional mode: 1.04 kWh
- Energy consumption per cycle in fan-forced convection mode:0.81 kWh
- Number of cavities: Main cavity Heat source: electrical Cavity volume:71 litre

Performance/technical information

- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- • Niche dimension (hxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual
- We recommend you to choose complementary products within N50, in order to assure an optimal design combination of your Built-In appliances.




N 50, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, STAINLESS STEEL B3AVH4HN1

Dimensioned drawings


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm



A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

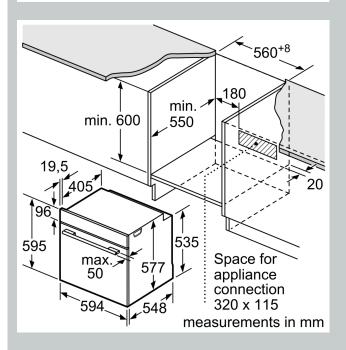





Dimensioned drawings

